

FABRICS & MESHES



Sunbrella Meshes & Fabrics in Stock


MESHES



Sunbrella Sling Odyssey 5928 0043 AUGUSTINE DENIM



Sunbrella Sling Odyssey SLI 50045 18 137 LOGAN GRAPHITE



Sunbrella Sling Odyssey SLI 5928 44 137 AUGUSTINE SILVER



Sunbrella Sling Odyssey SLI 50045 06 137 LOGAN SAND



Sunbrella Sling Odyssey SLI 50143 10 137 SAILING SEAGULL


FABRICS



Sunbrella Bahia Ikebana IKE J 369 140 Uyuni Class: E



Sunbrella Odyssey Natte NAT 10150 140 Taupe Chalk Class: C



Sunbrella
Odyssey Solids &
Stripes
SJA 3756 137
Lead Chine
Class: C



Sunbrella Odyssey Solids & Stripes SJA 3965 137 Blush Class: C



Sunbrella Odyssey Natte NAT 10020 140 White Class: C



Sunbrella
Odyssey Solids &
Stripes
SJA 3729 137
Taupe
Class: C



Sunbrella
Odyssey Solids &
Stripes
SJA 3757 137
Flanelle
Class: C




Sunbrella Odyssey Solids & Stripes SJA 3778 137 Quadri Grey Class: C


PHIFERTEX

Phifertex offers excellent performance while withstanding spills, splatters and the hustle and bustle of high-traffic areas. Features wider mesh holes, resulting in a slightly transparent look.

B &OUT DOOR

PHIFERTEX

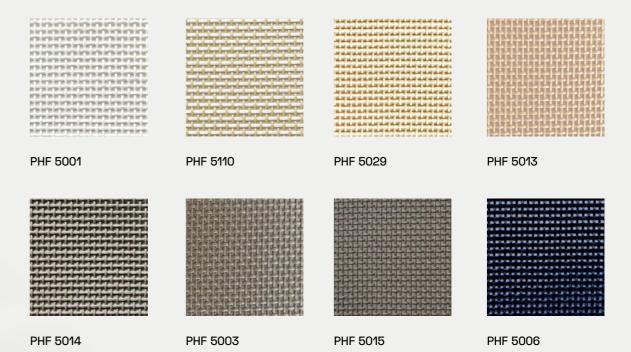



PHF 5005

Choose the mesh upholstery for the aluminum frame. Both options are mesh and included in retail price.



PHIFER INCORPORATED TEXTILE LAB


TECHNICAL INFORMATION

	REFERENCE	NOMINAL RESULTS		
CHARACTERISTIC	TEST METHOD	WARP	FILL	
MESH (ends/inch)	ASTM D 3775	15	15	
YARN DIAMETER (inch)	TMS-TM-001	0,0267	0,0265	
ENSILE STRENGTH				
A) CUT STRIP METHOD (Ib)	ASTM D 5035	259	266	
B) GRAB METHOD (Ib)	ASTM D 5034	314	336	
TEARING STRENGTH				
TRAPEZOID METHOD (Ib)	ASTM D 5587	77	84	
STIFFNESS (mg)	ASTM D 3656	309	329	
STRETCH (%)	TMS-TM-002	1,8	2,8	
SET (%)		0,1	0,1	
MESH WEIGHT (oz/sq yd)	ASTM D 3776	12,4	16	
FABRIC THICKNESS (inch)	ASTM D 1777	0,0	31	
BOND STRENGTH (Ib)	CS 248-64(5.5)	63		
OPENNESS/TRANSMITTANCE (%)	17	26,42		
MULLEN BURSTING STRENGTH(psi)	FS L-S-125B(4.4.7)	>60	00	
COLORFASTNESS TO 1200HRS Color Change According to AATCC Gray Scale	ASTM G154	5		

^{*}Results above are based on one test specimen, therefore, no specification has been established and this document can not be used as certification to any specification.





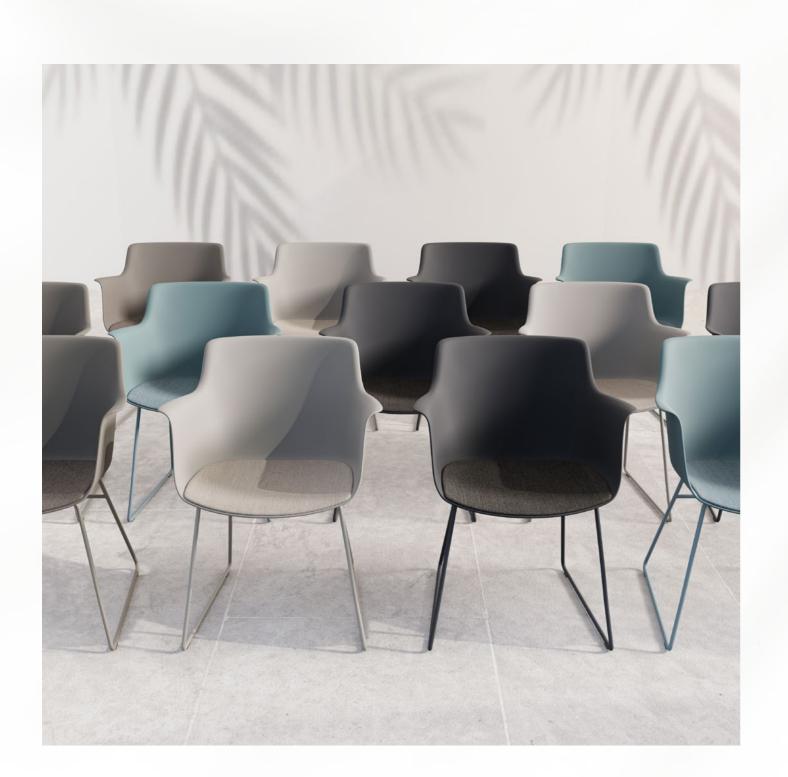

DURABILITY/CLEANABILITY	Functional and durable, Phifertex fabrics offer excellent performance while withstanding spills, splatters and the hustle and bustle of high traffic areas. These fabrics are easy to maintain – easily cleaned with soap and water or 50/50 bleach to water solution.
WARRANTY	Phifer offers a 3-year limited warranty for Phifertex Outdoor Fabrics. This warranty covers the Phifertex Plus Slingable Fabrics fabric becoming non-functional due to loss of dimensional stability from exposure to conditions including sunlight, mildew, rot and normal atmospheric conditions. The warranty does not cover damage to the fabric from any source nor does it cover gradual fading or discoloration from atmospheric pollution or other debris. This warranty remains in effect for 3 years from the date of purchase. Phifer will provide new fabric, free of charge, to replace the non-functioning fabric. This warranty does not cover the cost of labor or other consequential or incidental expenses.
GREENGUARD	GREENGUARD Certification ensures products have met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air. Phifer was the first manufacturer in the outdoor fabric industry to achieve GREENGUARD certification. Certification is completely voluntary and ensures that the highest industry standards are being applied to maintain indoor air quality for the health and safety of building occupants.
MICROBAN	Phifertex fabrics are the only outdoor furniture fabrics in the world to include Microban protection. Microban antimicrobial protection works continuously to inhibit the growth of bacteria, mold and mildew that can cause stains, odors and product deterioration. • Microban antimicrobial protection is infused into Phifertex fabrics for lasting protection that won't wash off or wear away for the lifetime of the product. • Phifertex fabrics infused with Microban antimicrobial technology are ideal for any commercial or residential environment where microbes are a concern, including healthcare, hospitality, home, office, schools and institutions.
FLAME RETARDANCE	 National Fire Protection Association, NFPA No. 101, "Life Safety Code", Class "A" rating. (Tested in accordance to ASTM E84, Surface Burning Characteristics of Building Material.) 17x11 (ASTM E84-16), 25x25 (ASTM E84-15b), 37x15 (ASTM E84-16), Plus (ASTM E84-15b) International Building Code (IBC), Section 803.1.1, Class "A" rating (Tested in accordance to ASTM E84). Upholstered Furniture Action Council Fabric Classification Test Method 1990 (UFAC) - Class "I" Rating. Federal Motor Vehicles Safety Standards, Section 571.302, Standard Number 302 (FMVSS 302), Flammability of Interior Materials. California Technical Bulletin 117-2013, Section 1, Cover Fabric Test.

CERTIFICATIONS



SUNBRELLA SLING ODYSSEY

Focusing on subtle patterns that read as textures, Sunbrella Sling allows you to achieve an elevated indoor aesthetic in an outdoor setting.
Sunbrella Sling blends the strength of PVC with the softness of Sunbrella acrylic yarn for added comfort. Sunbrella Sling is ideal for crafting fully-upholstered furniture pieces for outdoor patios and other traditional sling applications.

MESH



SLING - ODYSSEY



Choose the mesh upholstery for the aluminum frame. Both options are mesh and included in retail price.





SLING - ODYSSEY -

PRODUCT SPECIFICATIONS

	STANDARDS NORMES	SLING AUGUSTINE	SLING LOGAN	SLING SAILING		
INFO		20% Sunbrella Acrylic, 80% PES - PVC 54" / 137 cm width Selvedge is Left / Right	58.8% Sunbrella® Non-Phthalate PVC, 22.1% Sunbrella® Polyester, 19.1% Sunbrella® Acrylic 54" / 137 cm width Selvedge is Left / Right	47.2% Sunbrella® Non-Phthalate PVC, 35% Sunbrella® Acrylic, 17.8% Sunbrella® Polyester 54" / 137 cm width Selvedge is Left / Right		
VARRANTY		We stand behind our fabrics with a guarantee that's best in the industry: a 5-year limited warranty for upholstery fabrics, specialty fabrics and decorative shade fabrics.				
HOW TO CLEAN		1-Brush off loose dirt l	naintenance of your Sunb before it becomes embed on as they occur, and sp	dded		
ZERO LANDFILL		industrial Today, eve	60 years, Sunbrella® has r wastes such as yarn and ery Sunbrella® manufactu sends absolutely no was	d packaging. uring facility around		
COMPOSITION		11% Sunbrella® Acrylic 25% Polyester 64% PVC	19% Sunbrella® Acrylic 22% Polyester 59% PVC	35% Sunbrella® Acrylic 17.8% Polyester 47.2% PVC		
FINISH		Water-Repellent & Sta	in-Proof			
MINIMUM USEFULL WIDTH	EN 1773	137				
WEIGHT	ISO 3801 g/sqm - g/m²	505	480	580		
ROLL LENGTH	LM - ML	40				
SPRAY TEST	ISO 4920 Class/5	-				
COLOUR FASTNESS UV INDOOR	ISO 105B02 Class/8	8				
COLOUR FASTNESS TO WEATHER OUTDOOR	ISO 105B04 - 1000 H Class / 5	4-5				
WASH COLOUR FASTNESS 30°C	ISO 105C06 Class/5	5				
COLOUR FASTNESS DRY FRICTION	ISO 105X12 Class/5	5				
COLOUR FASTNESS WET FRICTION	ISO 105X12 Class/5	5				
CARE INSTRUCTIONS						

Cleaning
Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use bleach or alcohol.

CERTIFICATIONS







LIVIO

Livio comes in a range of 10 colours and creates a unique reflection of neutral backgrounds with crosswise yarns.







QUALITY NAME				LIVIO
WIDTH				140 CM +/- 1 CM
WEIGHT				355 GR/M ²
сомроз	SITION			% 100 OLEFIN
TEST	TEST		STANDARD	
PILLING			EN ISO 12945-2 : 2000 (5000 revs)	4-5
SEAM S	IDDACE	WEFT	13936-2 : 2004	4,8 mm
SEAIVI SI	LIPPAGE	WARP	13930-2:2004	4,6 mm
ABRASS	ION		EN ISO 12945-2 : 1998	20.000
	RUBBING	DRY	BS EN 105-X12 : 2001	4-5
COLOR		WET	BS EN 100-X12 ; 2001	4-5
	LIGHT		BS EN 105-B02 : 1994	7-8
OIL REPELLENCY			ISO EN 14419	3
SPRAY TEST			BS EN ISO 1920	4-5
FLAMMIBILITY			EN ISO 1021-1	Pass
ANTI BA	CTERIAL		LIS L 1902	Pass

COLOR RESISTANCE

FASTNESS TO	STANDARD		Varies according to the valve written next to the product name				
		LOD	OD	OD+ OD+			
LIGHT	BS EN ISO 105-B02	7	7	7/8	8		
WEATHERING	BS EN ISO 105-B04	6	6/7	7	7/8		
UV	ASTM G-154 (1200 Hours)	4	4	4/5	5		
WASHING	BS EN ISO 105-C06 40 C	4/5	4/5				
SEA WATER	BS EN ISO 105-E02	4/5	4/5				
POOL WATER	BS EN ISO 105-E03	4/5	4/5				
RUBBING	BS EN ISO 105-X12	4/5					
	CARE AND MAINTANCE INSTRUCTIONS						

¹⁻ Remove any residual soil by ligtly brushing or scraping the stain by sponging down with water

2- If further cleaning needed, apply a solution with soap an water. Work the solution into stain by lightly scrubbing the area with sponge or very soft bristle brush

Vacuum the fabric prior to cleaning

Do not be alarmed if stain is not removed after first application and removal of cleaning solution

If the fabric can be removed from furniture it may be cleaned in a mild soap and warm water (40 $^{\circ}$) solution in washing machine and dried in an environment also less then 40 $^{\circ}$.

Do not steam press or dry in electric or gas dryers. Allow fabric to be air dried naturally

REMARKS

Do not leave your product after 50 °C outside temperature under directly sunlight

Results can be vary region by region

The values for the products my have a varition of \pm /- %5

Art Picture is for indoor use only

³⁻ Remove cleaning solutions with a clean soft towel or sponge to remove the stain and excess cleaning solution. [Repeat step 2 and 3 until stain is removed.]

⁴⁻ Rinse the affected are throughly remove cleaning solution from the fabric

MIRELLA

Mirella comes with 5 different compositions of thin and thick stripes. This mix is ideal to create out of the ordinary outdoor spaces. B & QUT

MIRELLA -









25

QUALITY NAME				MIRELLA
WIDTH				140 CM +/- 1 CM
WEIGHT				206 GR/M ²
COMPOS	SITION			% 100 OLEFIN
TEST			STANDARD	
PILLING			EN ISO 12945-2 : 2000 (5000 revs)	4
SEAM SI	IDDAOF	WEFT	13936-2:2004	2,5 mm
SEAWI SI	LIPPAGE	WARP	15950-2 : 2004	3,0 mm
ABRASS	ION		EN ISO 12945-2 : 1998	13.000
	RUBBING	DRY	BS EN 105-X12 : 2001	4-5
COLOR		WET	BS EN 105-A12 : 2001	4-5
	LIGHT		BS EN 105-B02 : 1994	7-8
OIL REPELLENCY			ISO EN 14419	3
SPRAY TEST			BS EN ISO 1920	4-5
FLAMMIBILITY			EN ISO 1021-1	Pass
ANTI BA	CTERIAL		LIS L 1902	Pass

COLOR RESISTANCE

FASTNESS TO	STANDARD		Varies according to the valve written next to the product name				
		LOD	OD	OD OD+ OD			
LIGHT	BS EN ISO 105-B02	7	7	7/8	8		
WEATHERING	BS EN ISO 105-B04	6	6/7	7	7/8		
UV	ASTM G-154 (1200 Hours)	4	4	4/5	5		
WASHING	BS EN ISO 105-C06 40 C	4/5	4/5				
SEA WATER	BS EN ISO 105-E02	4/5	4/5				
POOL WATER	BS EN ISO 105-E03	4/5					
RUBBING	BS EN ISO 105-X12	4/5					
	CARE AND MAINTANCE INSTRUCTIONS						

¹⁻ Remove any residual soil by ligtly brushing or scraping the stain by sponging down with water

Vacuum the fabric prior to cleaning

Do not be alarmed if stain is not removed after first application and removal of cleaning solution

If the fabric can be removed from furniture it may be cleaned in a mild soap and warm water (40 $^{\circ}$) solution in washing machine and dried in an environment also less then 40 $^{\circ}$.

Do not steam press or dry in electric or gas dryers. Allow fabric to be air dried naturally

REMARKS

Do not leave your product after 50 C° outside temperature under directly sunlight

Results can be vary region by region

The values for the products my have a varition of +/- %5

Art Picture is for indoor use only

²⁻ If further cleaning needed, apply a solution with soap an water. Work the solution into stain by lightly scrubbing the area with sponge or very soft bristle brush

³⁻ Remove cleaning solutions with a clean soft towel or sponge to remove the stain and excess cleaning solution. [Repeat step 2 and 3 until stain is removed.]

⁴⁻ Rinse the affected are throughly remove cleaning solution from the fabric

NARIO

Nario has a range of 8 different colours that create a beautiful harmony when combined together in outdoor spaces. &OUT DOOR

NARIO





QUALITY NAME				NARIO	
WIDTH				140 CM +/- 1 CM	
WEIGHT				263 GR/M ²	
сомроз	SITION			% 100 OLEFIN	
TEST	TEST		STANDARD		
PILLING			EN ISO 12945-2: 2000 (5000 revs)	4-5	
SEAM SI	IDDAOF	WEFT		4,8 mm	
SEAINI SI	LIPPAGE	WARP	13936-2:2004	4,6 mm	
ABRASS	ION		EN ISO 12945-2 : 1998	23.000	
	RUBBING	DRY	BS EN 105-X12 : 2001	4-5	
COLOR		WET	- BS EN 105-X12 : 2001	4-5	
	LIGHT		BS EN 105-B02 : 1994	7-8	
OIL REPELLENCY			ISO EN 14419	3	
SPRAY TEST			BS EN ISO 1920	4-5	
FLAMMI	BILITY		EN ISO 1021-1	Pass	
ANTI BA	CTERIAL		LIS L 1902	Pass	

COLOR RESISTANCE

FASTNESS TO	STANDARD		Varies according to the valve written next to the product name			
		LOD	OD	OD+	OD++	
LIGHT	BS EN ISO 105-B02	7	7	7/8	8	
WEATHERING	BS EN ISO 105-B04	6	6/7	7	7/8	
UV	ASTM G-154 (1200 Hours)	4	4	4/5	5	
WASHING	BS EN ISO 105-C06 40 C	4/5	4/5			
SEA WATER	BS EN ISO 105-E02	4/5	4/5			
POOL WATER	BS EN ISO 105-E03	4/5	4/5			
RUBBING	BS EN ISO 105-X12	4/5				

¹⁻ Remove any residual soil by ligtly brushing or scraping the stain by sponging down with water

CARE AND MAINTANCE INSTRUCTIONS

Vacuum the fabric prior to cleaning

Do not be alarmed if stain is not removed after first application and removal of cleaning solution

If the fabric can be removed from furniture it may be cleaned in a mild soap and warm water $(40~\mathrm{C}^*)$ solution in washing machine and dried in an environment also less then 40 C*.

Do not steam press or dry in electric or gas dryers. Allow fabric to be air dried naturally

REMARKS

Do not leave your product after 50 °C outside temperature under directly sunlight

Results can be vary region by region

The values for the products my have a varition of +/- %5

Art Picture is for indoor use only

25

²⁻ If further cleaning needed, apply a solution with soap an water.
Work the solution into stain by lightly scrubbing the area with sponge or very soft bristle brush

³⁻ Remove cleaning solutions with a clean soft towel or sponge to remove the stain and excess cleaning solution. [Repeat step 2 and 3 until stain is removed.]

⁴⁻ Rinse the affected are throughly remove cleaning solution from the fabric

TELMA

Telma has a range of 8 solid colours and reflects the beautiful effect of two-coloured linen weawing.





QUALITY NAME				TELMA	
WIDTH				140 CM +/- 1 CM	
WEIGHT				343 GR/M²	
COMPOS	ITION			% 100 OLEFIN	
TEST			STANDARD		
PILLING			EN ISO 12945-2 : 2000 (5000 revs)	4-5	
SEAM SL	IDDACE	WEFT	13936-2:2004	4,8 mm	
SEAIVI SL	IPPAGE	WARP	13930-2:2004	4,6 mm	
ABRASSI	ON		EN ISO 12945-2 : 1998	50.000	
	RUBBING	DRY	- BS EN 105-X12 : 2001	4-5	
COLOR		WET	- BS EN 108-A12 : 2001	4-5	
	LIGHT		BS EN 105-B02 : 1994	7-8	
OIL REPELLENCY			ISO EN 14419	3	
SPRAY TEST			BS EN ISO 1920	4-5	
FLAMMIBILITY			EN ISO 1021-1	Pass	
ANTI BAG	CTERIAL		LIS L 1902	Pass	

COLOR RESISTANCE

FASTNESS TO	STANDARD		Varies according to the valve written next to the product name				
		LOD	OD	OD+	OD++		
LIGHT	BS EN ISO 105-B02	7	7	7/8	8		
WEATHERING	BS EN ISO 105-B04	6	6/7	7	7/8		
UV	ASTM G-154 (1200 Hours)	4	4	4/5	5		
WASHING	BS EN ISO 105-C06 40 C	4/5	4/5				
SEA WATER	BS EN ISO 105-E02	4/5	4/5				
POOL WATER	BS EN ISO 105-E03	4/5	4/5				
RUBBING	BS EN ISO 105-X12	4/5					
	CARE AND MAINTANCE INSTRUCTIONS	'					

¹⁻ Remove any residual soil by ligtly brushing or scraping the stain by sponging down with water

Vacuum the fabric prior to cleaning

Do not be alarmed if stain is not removed after first application and removal of cleaning solution

If the fabric can be removed from furniture it may be cleaned in a mild soap and warm water (40 °C) solution in washing machine and dried in an environment also less then 40 °C .

Do not steam press or dry in electric or gas dryers. Allow fabric to be air dried naturally

REMARKS

Do not leave your product after 50 C° outside temperature under directly sunlight

Results can be vary region by region

The values for the products my have a varition of +/- %5

Art Picture is for indoor use only

²⁻ If further cleaning needed, apply a solution with soap an water.

Work the solution into stain by lightly scrubbing the area with sponge or very soft bristle brush


³⁻ Remove cleaning solutions with a clean soft towel or sponge to remove the stain and excess cleaning solution. (Repeat step 2 and 3 until stain is removed.)

⁴⁻ Rinse the affected are throughly remove cleaning solution from the fabric

VERO

Vero comes in a range of 7 different colours and has a holistic design understanding together with modern patterns and glossy, elegant look.



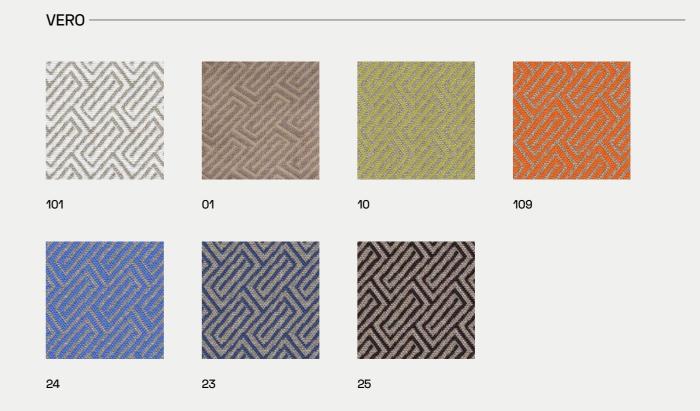

QUALITY NAME				VERO
WIDTH				140 CM +/- 1 CM
WEIGHT				318 GR/M ²
сомроз	SITION			% 100 OLEFIN
TEST			STANDARD	
PILLING			EN ISO 12945-2 : 2000 (5000 revs)	4
SEAM SI	WEFT		13936-2:2004	5,5 mm
SEAIVI SI	LIPPAGE	WARP	15950-2 : 2004	3,1 mm
ABRASS	ABRASSION		EN ISO 12945-2 : 1998	18.000
	RUBBING	DRY	BS EN 105-X12 : 2001	4-5
COLOR		WET	B3 EN 100-7/12 . 2001	4-5
	LIGHT		BS EN 105-B02 : 1994	7-8
OIL REPELLENCY			ISO EN 14419	3
SPRAY TEST			BS EN ISO 1920	4-5
FLAMMIBILITY			EN ISO 1021-1	Pass
ANTI BACTERIAL			LIS L 1902	Pass

COLOR RESISTANCE

FASTNESS TO	STANDARD		Varies according to the valve written next to the product name			
		LOD	OD	OD+	OD++	
LIGHT	BS EN ISO 105-B02	7	7	7/8	8	
WEATHERING	BS EN ISO 105-B04	6	6/7	7	7/8	
UV	ASTM G-154 (1200 Hours)	4	4	4/5	5	
WASHING	BS EN ISO 105-C06 40 C	4/5	4/5			
SEA WATER	BS EN ISO 105-E02	4/5	4/5			
POOL WATER	BS EN ISO 105-E03	4/5	4/5			
RUBBING	BS EN ISO 105-X12	4/5				

¹⁻ Remove any residual soil by ligtly brushing or scraping the stain by sponging down with water

2- If further cleaning needed, apply a solution with soap an water. Work the solution into stain by lightly scrubbing the area with sponge or very soft bristle brush

Vacuum the fabric prior to cleaning

Do not be alarmed if stain is not removed after first application and removal of cleaning solution

If the fabric can be removed from furniture it may be cleaned in a mild soap and warm water (40 $^{\circ}$) solution in washing machine and dried in an environment also less then 40 $^{\circ}$.

Do not steam press or dry in electric or gas dryers. Allow fabric to be air dried naturally

REMARKS

Do not leave your product after 50 °C outside temperature under directly sunlight

Results can be vary region by region

The values for the products my have a varition of +/- %5

Art Picture is for indoor use only

³⁻ Remove cleaning solutions with a clean soft towel or sponge to remove the stain and excess cleaning solution. (Repeat step 2 and 3 until stain is removed.)

⁴⁻ Rinse the affected are throughly remove cleaning solution from the fabric

&OUT DOOR

PLAIN MELANGE

PLAIN MELANGE

Water-repellent fabric with anti-stain and anti-mould treatment, high colour fastness and resistance to sunlight exposure. Plain Melange is characterised by its design, fineness, and the soft touch. It can be used in- and outdoor.

016 018 020 070 072 079 583 783 833 693 694 834 835 870















PRODUCT SPECIFICATIONS


TIPOLOGY	100% solution dyed acrylic outdoor fabric.
CHARACTERISTICS	Water-repellent fabric with anti-stain and anti-mould treatment, high colour fastness and resistant to sunlight exposure. The fabric is characterised by its design and fineness, by the soft touch and can be used in- and outdoor.
APPLICATIONS	Indoor and outdoor furniture: upholstery, cushions, draperies sheers. Suitable also for marine upholstery.
WARRANTY	Irisun Living fabrics are guaranteed for 5 years concerning the UV resistance and the colour fastness. The warranty is valid in case of respect of the application of the fabric and of the instructions for care and cleaning.
FEATURES	Uv Rays Protection Shield
	Water Repellent Stain Resistant Mildew Resistant
	Breathable Fearless Fabric
	Bleach Cleanable Fade Resistant
WIDTH	137 cm
ROLL LENGTH	30 m
WEIGHT	240 gr/m²
MARTINDALE	15000 cycles
OIL-REPELLENCY	5 off 8
SPRAY TEST	5 off 5
UV COLOUR FASTNESS	7 off 8
COLOUR FASTNESS TO WEATHER	7 off 8
COLOUR FASTNESS AFTER WASHING AT 40 C	5 off 5
FLAME RESISTANCE	CAL TB 117 - 2013 Section 1
FLAME RESISTANCE	Indoor and outdoor furniture: upholstery, cushions, draperies e sheers. Suitable also for marine upholstery.
TOLERANCE	±5%
BIOCIDES	It contains biocidal agent with approved active substances: Octyl Isothiazolinone

MATTEO

Matteo has a range of 5 living colours and creates an energetic contrast between sparkles of colours and backgrounds. B &OUT DOOR

MATTEO









25



QUALITY NAME				MATTEO
WIDTH				140 CM +/- 1 CM
WEIGHT				463 GR/M ²
COMPOS	SITION			% 100 OLEFIN
TEST			STANDARD	
PILLING			EN ISO 12945-2 : 2000 (5000 revs)	5
CEAM CI	WEFT		13936-2:2004	3,5 mm
SEAM SLIPPAGE		WARP	10930-2 : 2004	2,5 mm
ABRASSI	ABRASSION		EN ISO 12945-2 : 1998	28.000
	RUBBING	DRY	BS EN 105-X12 : 2001	4-5
COLOR		WET	BS EN 100-A12 : 2001	4-5
	LIGHT		BS EN 105-B02 : 1994	7-8
OIL REPELLENCY			ISO EN 14419	3
SPRAY TEST			BS EN ISO 1920	4-5
FLAMMIBILITY			EN ISO 1021-1	Pass
ANTI BACTERIAL			LIS L 1902	Pass

COLOR RESISTANCE

STANDARD		Varies according to the valve written next to the product name			
	LOD	OD	OD+	OD++	
BS EN ISO 105-B02	7	7	7/8	8	
BS EN ISO 105-B04	6	6/7	7	7/8	
ASTM G-154 (1200 Hours)	4	4	4/5	5	
BS EN ISO 105-C06 40 C	4/5	4/5			
BS EN ISO 105-E02	4/5	4/5			
BS EN ISO 105-E03	4/5	4/5			
BS EN ISO 105-X12	4/5				
	BS EN ISO 105-B02 BS EN ISO 105-B04 ASTM G-154 (1200 Hours) BS EN ISO 105-C06 40 C BS EN ISO 105-E02 BS EN ISO 105-E03	STANDARD LOD BS EN ISO 105-B02 7 BS EN ISO 105-B04 6 ASTM G-154 (1200 Hours) 4 BS EN ISO 105-C06 40 C 4/5 BS EN ISO 105-E02 4/5 BS EN ISO 105-E03 4/5	STANDARD next to the property of the property	STANDARD LOD OD + LOD OD OD+ BS EN ISO 105-B02 7 7 7/8 BS EN ISO 105-B04 6 6/7 7 ASTM G-154 (1200 Hours) 4 4 4/5 BS EN ISO 105-C06 40 C 4/5 BS EN ISO 105-E02 4/5 BS EN ISO 105-E03 4/5	

1- Remove any residual soil by ligtly brushing or scraping the stain by sponging down with water

2- If further cleaning needed, apply a solution with soap an water.
Work the solution into stain by lightly scrubbing the area with sponge or very soft bristle brush

3- Remove cleaning solutions with a clean soft towel or sponge to remove the stain and excess cleaning solution. (Repeat step 2 and 3 until stain is removed.)

4- Rinse the affected are throughly remove cleaning solution from the fabric

Vacuum the fabric prior to cleaning

Do not be alarmed if stain is not removed after first application and removal of cleaning solution

If the fabric can be removed from furniture it may be cleaned in a mild soap and warm water (40 $^{\circ}$) solution in washing machine and dried in an environment also less then 40 $^{\circ}$.

Do not steam press or dry in electric or gas dryers. Allow fabric to be air dried naturally

REMARKS

Do not leave your product after 50 C° outside temperature under directly sunlight

Results can be vary region by region

The values for the products my have a varition of +/- %5

Art Picture is for indoor use only

SUNBRELLA

SOLIDS & STRIPES


ODYSSEY

Solids is the standard classic fabric in our collection. It comes in a range of 50 colours with ottoman, piqué and chiné effects to create a bespoke look. Available in three iconic strips and highly resistant, Solids are adapted to any use.



SOLIDS & STRIPES - ODYSSEY









SJA 3966 137 MARBLE

SJA 3741 137 SILVER GREY

SJA 5453 137 CANVAS









SJA 3780 137 LIN

SJA 3988 137 STONE

SJA 3706 137 SHINGLES

SJA 5422 137 ANTIQUE BEIGE









SJA 48009/00 137 ARMOR PEBBLE

SJA 5476 137 SJA 3907 137 HEATHER BEIGE TAUPE CHINÉ

SJA 3729 137 TAUPE









SJA 3967 137 MINT

SJA 3970 137 LICHEN

SJA 3738 137 MACAO

SJA 3987 137 ALPINE








SJA 3737 137 ARDOISE



SJA 3127 137 SJA 3792 137 MINK BROWN DARK SMOKE



SJA 3705 137 CHARCOAL



SJA 3906 137 CARBON



SJA 3756 137 LEAD CHINÉ



SJA 3757 137 FLANELLE



SJA 3758 137 SOOTY



SJA 5408 137 BLACK



SJA 3778 137 QUADRI GREY




SJA 3777 137 PORTO GREY CHINÉ



SJA 3776 137 PORTO BLUE CHINÉ



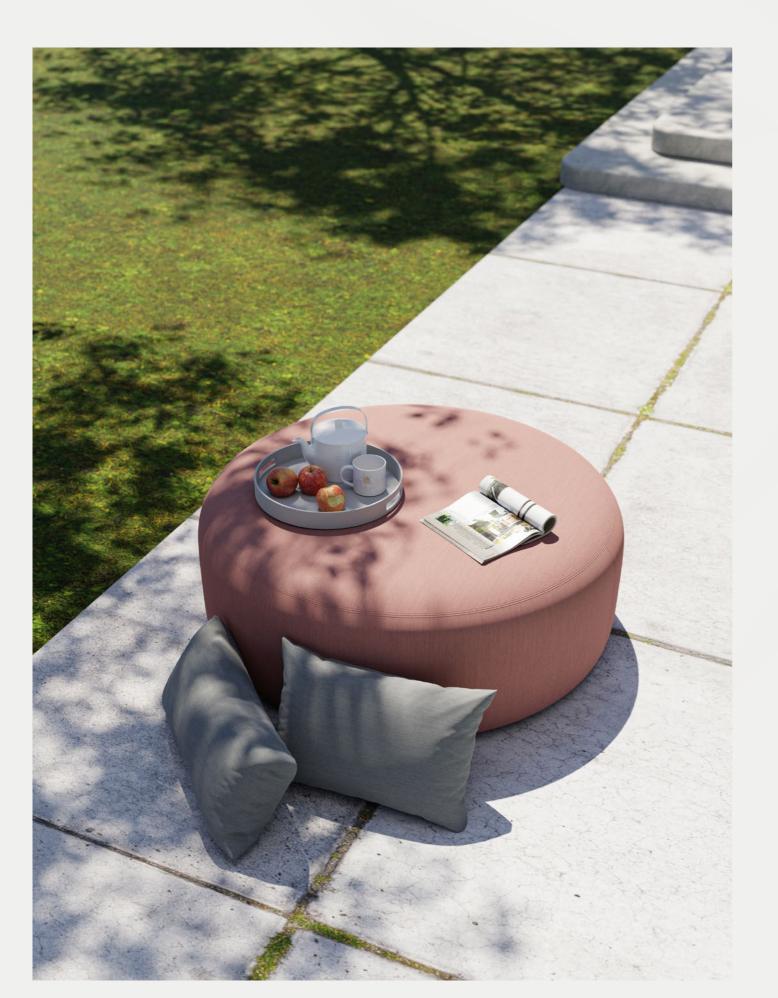

SOLIDS & STRIPES - ODYSSEY

PRODUCT SPECIFICATIONS

	STANDARDS NORMES	SOLIDS & STRIPES
INFO		100% Sunbrella Acrylic 54" / 137 cm width Selvedge is Left / Right
VARRANTY		We stand behind our fabrics with a guarantee that's best in the industry: a 5-year limited warranty for upholstery fabrics, specialty fabrics and decorative shade fabrics.
HOW TO CLEAN		For easy day-to-day maintenance of your Sunbrella fabric: 1-Brush off loose dirt before it becomes embedded 2-Wipe up spills as soon as they occur, and spot-clean fabric before stains set.
ZERO LANDFILL		For over 30 years, Sunbrella® has recycled its industrial wastes such as yarn and packaging. Today, every Sunbrella® manufacturing facility around the globe sends absolutely no waste to the landfill.
COMPOSITION		100% Sunbrella® Acrylic
FINISH		Water-Repellent & Stain-Proof
MINIMUM USEFULL WIDTH	EN 1773	137
WEIGHT	ISO 3801 g/sqm - g/m²	260
ROLL LENGTH	LM - ML	50
SPRAY TEST	ISO 4920 Class/5	5
COLOUR FASTNESS UV INDOOR	ISO 105B02 Class/8	8
COLOUR FASTNESS TO WEATHER OUTDOOR	ISO 105B04 - 1000 H Class / 5	4-5
WASH COLOUR FASTNESS 30°C	ISO 105C06 Class/5	5
COLOUR FASTNESS DRY FRICTION	ISO 105X12 Class/5	5
COLOUR FASTNESS WET FRICTION	ISO 105X12 Class/5	5
CARE INSTRUCTIONS		Froning reinforces the treatment

Cleaning
Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use bleach or alcohol.

CERTIFICATIONS







SUNBRELLA NATÉ ODYSSEY

Timeless and versatile, Natté is a classic upholstery fabric. Natural to the eye and elegant to the touch, it is ideal for seats and accessories. Natté comes in a rich palette of colours, luxurious neutrals and new designs in invigorating, sophisticated hues.




NATTE - ODYSSEY











NAT 10059 140 DARK TAUPE



NAT 10231 140 CARMINE



NAT 10101 140 TONKA



NAT 10022 140 **GREY CHINE**



NAT 10063 140 CHARCOAL CHINÉ



NAT 10030 140 SOOTY



NATTE - ODYSSEY -

PRODUCT SPECIFICATIONS

	STANDARDS NORMES	NATTE
INFO		100% Sunbrella Acrylic 55" / 140 cm width Selvedge is Left / Right
VARRANTY		We stand behind our fabrics with a guarantee that's best in the industry: a 5-year limited warranty for upholstery fabrics, specialty fabrics and decorative shade fabrics.
HOW TO CLEAN		For easy day-to-day maintenance of your Sunbrella fabric: 1-Brush off loose dirt before it becomes embedded 2-Wipe up spills as soon as they occur, and spot-clean fabric before stains set.
ZERO LANDFILL		For over 30 years, Sunbrella® has recycled its industrial wastes such as yarn and packaging. Today, every Sunbrella® manufacturing facility around the globe sends absolutely no waste to the landfill.
COMPOSITION		100% Sunbrella® Acrylic
FINISH		Water-Repellent & Stain-Proof
MINIMUM USEFULL WIDTH	EN 1773	140
WEIGHT	ISO 3801 g/sqm - g/m²	275
ROLL LENGTH	LM - ML	50
SPRAY TEST	ISO 4920 Class/5	5
COLOUR FASTNESS UV INDOOR	ISO 105B02 Class/8	8
COLOUR FASTNESS TO WEATHER OUTDOOR	ISO 105B04 - 1000 H Class / 5	4-5
WASH COLOUR FASTNESS 30°C	ISO 105C06 Class/5	5
COLOUR FASTNESS DRY FRICTION	ISO 105X12 Class/5	5
COLOUR FASTNESS WET FRICTION	ISO 105X12 Class/5	5
CARE INSTRUCTIONS		Sign A D D D D D D D D D D D D D D D D D D

Cleaning
Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use bleach or alcohol.

CERTIFICATIONS







SUNBRELLA

IKEBANA

BAHIA

Like a shadow puppet, the design of the Ikebana fabric is displayed across its width, inviting us to enjoy the show. The bold colorful contrasts bring this plant-inspired jacquard to life and transports us to another land. Available in a range of six sparkling colours, Ikebana is ideal for drapes, seats and accessories.



IKEBANA - BAHIA



IKE J369 140 UYUNI



IKE J331 140 BAYOU



IKE J332 140 SAFARI



IKE J330 140 CANOPY



IKE J333 140 POLAR



IKE J334 140 CANYON



IKEBANA - BAHIA

PRODUCT SPECIFICATIONS

	STANDARDS NORMES	IKEBANA
INFO		55.1181" x 45.0787" 140.00 cm x 114.50 cm repeat 100% Sunbrella Acrylic 55" / 140 cm width Selvedge is Left / Right
VARRANTY		"We stand behind our fabrics with a guarantee that's best in the industry: a 5-year limited warranty for upholstery fabrics, specialty fabrics and decorative shade fabrics."
HOW TO CLEAN		"For easy day-to-day maintenance of your Sunbrella fabric: 1-Brush off loose dirt before it becomes embedded 2-Wipe up spills as soon as they occur, and spot-clean fabric before stains set."
ZERO LANDFILL		For over 30 years, Sunbrella® has recycled its industrial wastes such as yarn and packaging. Today, every Sunbrella® manufacturing facility around the globe sends absolutely no waste to the landfill.
COMPOSITION		100% Sunbrella Acrylic
FINISH		Water-Repellent & Stain-Proof
MINIMUM USEFULL WIDTH	EN 1773	140
WEIGHT	ISO 3801 g/sqm - g/m²	525
ROLL LENGTH	LM - ML	25
SPRAY TEST	ISO 4920 Class/5	4
COLOUR FASTNESS UV INDOOR	ISO 105B02 Class/8	8
COLOUR FASTNESS TO WEATHER OUTDOOR	ISO 105B04 - 1000 H Class / 5	4-5
WASH COLOUR FASTNESS 30°C	ISO 105C06 Class/5	5
COLOUR FASTNESS DRY FRICTION	ISO 105X12 Class/5	5
COLOUR FASTNESS WET FRICTION	ISO 105X12 Class/5	5
CARE INSTRUCTIONS		Tooling reinforces the treatment

Cleaning
Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use bleach or alcohol.

CERTIFICATIONS











Upholstery Categories

CLASS	BRAND	NAME	TYPE
А	ALYA	LIVIO	FABRIC
	ALYA	MIRELLA	FABRIC
	ALYA	NARIO	FABRIC
	ALYA	TELMA	FABRIC
	ALYA	VERO	FABRIC
	IRUSUN	PLAIN MALANGE	FABRIC
В	ALYA	MATTEO	FABRIC
С	SUNBRELLA	SOLIDS & STRIPES	FABRIC
	SUNBRELLA	NATTE	FABRIC
E	SUNBRELLA	IKEBANA	FABRIC