



Steelcut 3

A three-dimensional surface resembling small pyramids or steel points. Comes in bright, confident hues.



New*

CLASS F



535



445



545



120






Colors may slightly vary due to photographic lighting sources or your monitor settings.



KVADRAT - STEELCUT 3

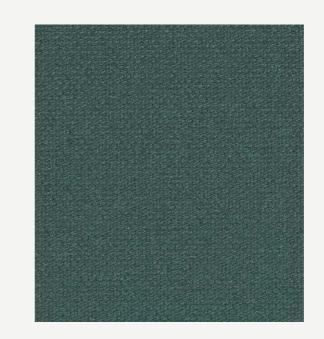



KVADRAT - STEELCUT 3



KVADRAT - STEELCUT 3

PRODUCT SPECIFICATIONS

Application	Offices, hotels, institutions, domestic
Composition	90% new wool, worsted, 10% nylon.
Width	App. 55 inches (140 cm).
Weight	App. 825 g/lin.m, 26.6 oz/ly.
Abrasion Resistance	App. 100,000 rubs acc. to the Martin
Flammability	AS/NZS 1530.3. AS/NZS 3837 Class 2. BS 5852 Crib 5 with treatment. BS 58 NFPA 260. SN 198 898 5.3 with treatm (Copy of test report available).
Light Fastness	(ISO) 5-6.
Fastness to Rubbing	Dry note 4-5 ISO 105-X12, Wet note 3
Sound Absorption	(EN ISO 354) 0.65/Class C (flat), 0.80
Airflow	1014 Pa s/m.
Pilling	EN ISO 3-4
Guarantee	10 Years
Physical properties	Pilling Class 4-5 Breaking strength warp 263 / weft 14 Seam slippage warp 127 / weft 58 lbs
Environmental benefits	EU Ecolabel compliant Free of intentionally added PFAS REACH compliant Californian Proposition 65 list complia LBC Red list compliant Healthier Hospitals compliant
Green building certificates	Greenguard Gold: Low chemical emiss Environmental Product Declaration (E ISO 14025 & EN 15804. Developed in a Health Product Declaration (HPD): De

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.



ic use. Great durability.

ndale method EN ISO 12947.

2. ASTM E84 Class A unadhered. ASTM E84 Class B adhered. 1852 part 1. EN 1021-1/2. IMO FTP Code 2010:Part 8. NF D 60 013. ment. UNI 917511M. US Cal. Bull. 117-20130. NO RM B2 / Q1.

3-5 ISO 105-X12

D/Class B (waved).

142 lbs. s.

iant

sion EPD): 3rd Party Verified. accordance with the European standard EN 15804+A2. eclaring textile content and substance



Steelcut Quartet

Softness, colour depth and durability. Has a sustainable profile and comes in optimistic, warm colourways



New*





354




684



764

KVADRAT - STEELCUT QUARTET

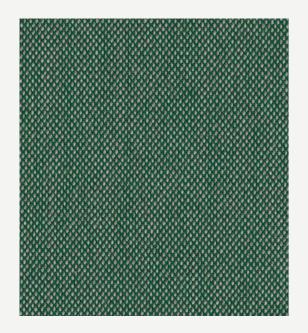

944

KVADRAT - STEELCUT QUARTET

PRODUCT SPECIFICATIONS

Application	Offices, hotels, institutions, domestic
Composition	90% new wool, worsted, 10% nylon.
Width	App. 55 inches (140 cm).
Weight	770 g/lin. m (24.8 oz/ ly)
Abrasion Resistance	App. 100,000 rubs acc. to the Martin
Flammability	AS/NZS 1530.3. AS/NZS 3837 Class 2 BS 5852 part 1. EN 1021-1/2. GB 5022 NFPA 260. SN 198 898 5.3 with treatr (Copy of test report available).
Light Fastness	(ISO) dry 4-5, wet 3-5.
Fastness to Rubbing	Dry note 4-5 ISO 105-X12, Wet note 4
Sound Absorption	(EN ISO 354) 0.70/Class C (flat), 0.95
Airflow	910 Pa s/m. EN 29053
Pilling	Note 4-5, EN ISO 12945
Guarantee	10 Years
Physical properties	Pilling Class 4-5 Breaking strength warp 263 / weft 1 Seam slippage warp 127 / weft 58 lb
Environmental benefits	EU Ecolabel compliant No use of halogen-based flame retain REACH compliant Californian Proposition 65 list compliant LBC Red list compliant Healthier Hospitals compliant
Green building certificates	Greenguard Gold: Low chemical emis Health Product Declaration (HPD): De

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.



tic use. Great durability.

indale method EN ISO 12947.

2. BS 5852 Crib 5 with treatment. BS 5852 ignition source 3. 222 B1 with treatment. IMO FTP Code 2010: Part 8. NF D 60 013. tment. UNI 9175 1IM. US Cal. Bull. 117-2013. ÖNORM B1/Q1.

e 4-5 ISO 105-X12

95/Class A (waved).

142 lbs. bs.

ardants (incl. brominated and chlorinated)

liant

ssion Declaring textile contentand substance



Colors may slightly vary due to photographic lighting sources or your monitor settings.

Steelcut Trio 3

An unicoloured look from a distance, reveals different nuances as the viewer gets nearer.

CLASS F



























KVADRAT - STEELCU	JT TRIO 3			KVADRAT - ST
716	713	796	756	113
865	746	883	253	966
776	283	476	426	916
376	416	806	336	906
276	105	124	195	

STEELCUT TRIO 3
















KVADRAT - STEELCUT TRIO 3

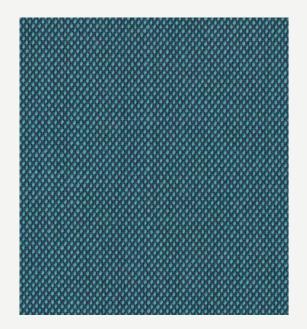

983

KVADRAT - STEELCUT TRIO 3

PRODUCT SPECIFICATIONS

Application	Offices, hotels, institutions, domestic
Composition	90% new wool, worsted, 10% nylon.
Width	App. 55 inches (140 cm).
Weight	App. 24.9 oz/ly (770 g/lin.m).
Abrasion Resistance	App. 100,000 rubs acc. to the Martin
Flammability	AS/NZS 1530.3. AS/NZS 3837 Class 2. BS 5852 part 1. EN 1021-1/2. GB 5022 NFPA 260. SN 198 898 5.3 with treatm (Copy of test report available).
Light Fastness	5-7 ISO 105-B02
Fastness to Rubbing	Dry note 4-5 ISO 105-X12, Wet note 3
Sound Absorption	(EN ISO 354) 0.70/Class C (flat), 0.95
Airflow	910 Pa s/m. EN 29053
Pilling	Note 4, EN ISO 12945
Guarantee	10 Years
Physical properties	Pilling Class 4-5 Breaking strength warp 263 / weft 14 Seam slippage warp 127 / weft 58 lbs
Environmental benefits	EU Ecolabel compliant No content of PFCs or 'PFAS' REACH compliant Californian Proposition 65 list complia LBC Red list compliant Healthier Hospitals compliant
Green building certificates	Greenguard Gold: Low chemical emiss Environmental Product Declaration (E ISO 14025 & EN 15804. Developed in a Health Product Declaration (HPD): De

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid



tic use. Great durability.

indale method EN ISO 12947.

2. BS 5852 Crib 5 with treatment. BS 5852 ignition source 3. 222 B1 with treatment. IMO FTP Code 2010: Part 8. NF D 60 013. tment. UNI 9175 1IM. US Cal. Bull. 117-2013. ÖNORM B1/Q1.

a 3-5 ISO 105-X12

95/Class A (waved).

142 lbs. bs.

liant

ssion (EPD): 3rd Party Verified. accordance with the European standard EN 15804+A2. Declaring textile content and substance



Remix 3

A tight, minimalistic weave, and derives its lively colour play from a combination of two different mélange yarns, which each combine up to three hues.

307

New*



276



173



842



962



912



286



113



906



982



Kvadrat - Remix 3	3			Kvadrat - Remix	3	
672	362	346	326	393	783	38
242	233	223	252	796	866	83
606	356	686	682	773	873	716
126	136	266	296	852	722	82
753	973	196	996	373	692	66























KVADRAT - REMIX 3

PRODUCT SPECIFICATIONS

Application	Offices, hotels, institutions, domestic
Composition	90% new wool, worsted, 10% nylon.
Width	App. 55 inches (140 cm).
Weight	Approx. 420 g/lin.m, 13.6 oz/ly
Abrasion Resistance	App. 100,000 rubs acc. to the Martinc
Flammability	AS/NZS 1530.3. AS/NZS 3837 Class 2. ignition source 3. BS 5852 part 1. EN 1 with treatment. IMO FTP Code 2010: P UNI 9175 1IM. US Cal. Bull. 117-2013. ÖN
Light Fastness	Note 5-7 ISO 105-B02
Fastness to Rubbing	Dry note 3-5 ISO 105-X12, Wet note 3
Sound Absorption	(EN ISO 354) 0.55/Class D (flat), 0.80/
Airflow	465 Pa s/m EN 29053
Pilling	Note 4, EN ISO 12945
Guarantee	10 Years
Physical properties	Pilling Class 4 Breaking Strength warp 132 / weft 13 Seam Slippage warp 126.5 / weft 130
Environmental benefits	EU Ecolabel compliant Free of intentionally added PFAS REACH compliant Californian Proposition 65 list complia LBC Red list compliant Healthier Hospitals compliant
Green building certificates	Greenguard Gold: Low chemical emiss Environmental Product Declaration (El ISO 14025 & EN 15804. Developed in a European standard EN 15804+A2. Health Product Declaration (HPD): Dec

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.



use. Great durability.

ndale method EN ISO 12947.

ASTM E84 class A. BS 5852 Crib 5 with treatment. BS 5852 1021-1/2. GB 50222 B1 with treatment. IMO FTP Code 2010: Part 7 Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. . NORM B1/Q1. (Copy of test report available).

3-5 ISO 105-X12

D/Class B (waved).

38 lbs. lbs.

iant

sion EPD): 3rd Party Verified. accordance with the

eclaring textile content and substance




Colors may slightly vary due to photographic lighting sources or your monitor settings.

Bazer

Made from premium New Zealand lambswool, providing the highest quality raw material that is ideal for spinning, weaving and dyeing.





STONEBRIDGE CUZ4W



BROKENHURST CUZ4B



ELLESMERE CUZ3Z



EDINBURGH CUZ1Y



MORAY CUZ4K



PLYMOUTH CUZ1R



VASSAR CUZ2U



KNIGHTSBRIDGE CUZ26



OXFORD CUZ09



LATYMER CUZ33

Camira - Blazer					Camira - Blazer		
DARTMOUTH CUZ2Q	DUNHURST CUZ58	ULSTER CUZ1F	Camphill Cuz1k		FALMOUTH CUZ4M	MOORLANDS CUZ4T	CHIC CUZ
Kingham Cuz3u	STOWE CUZ3R	BRYANSTON CUZ53	NEWPORT CUZ1L		BRISTOL CUZ4X	CATERHAM CUZ4A	WES CUZ
							のないのである
HEATHFIELD CUZ4V	OAKHAM CUZ3Y	MONTCREST CUZ3A	ABERTAY CUZ3B		DERBY CUZ4Q	EARLSCLIFFE CUZ3T	ACK CUZ
AMBLESIDE CUZ4G	Bodmin Cuz4f	CARDIFF CUZ1N	GRANTHAM CUZ4E		MALVERN CUZ3L	EYNESBURY CUZ2W	LEED CUZ
PADWORTH CUZ3N	ST ANDREWS CUZ86	TREVELYAN CUZ31	SURREY CUZ1E		UPLANDS CUZ4U	LEICESTER CUZ4N	TON CUZ
Coloro mov olichtly yery due to	abatagraphia lighting agurag	o or your monitor option		744	745	Coloro mov olich	the



HICHESTER UZ4C



VESLEY UZ82



CKWORTH UZ3P



eeds UZ4R



ONBRIDGE UZ3Q



HOLYOKE CUZ2T



DUNALK CUZ4D



WARWICK CUZ4L



FELSTED CUZ3S



GOLDSMITH CUZ39

Camira - Blazi	ER		
ORIEL CUZ18	WELLINGTON CUZ13	HANDCROSS CUZ63	MAGDALENE CUZ21
EDGE HILL CUZ90	MORETON CUZ3W	SIDCOT CUZ3V	ABERLOUR CUZ1J
NEWCASTLE CUZ1W	HULL CUZ1P	WINCHESTER CUZ12	SILCOATES CUZ30
BROMSGROVE CUZ35	GLENALMOND CUZ62		ALL STREET
KINGSMEAD	NAPIER		

NAPIER CUZ08

CUZ67

LUCTON CUZ3M

Colors may slightly vary due to photographic lighting sources or your monitor settings.

CAMIRA - BLAZER

PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating / Curtains
Composition	100% Virgin Wool. Non metallic dyestu
Environmental	Certified to Indoor Advantage [™] "Gold"
Width	140 cm minimum
Weight	460 g/m2 ±5%
Abrasion Resistance	Heavy duty / 10 year guarantee. Indep
Flammability	EN 1021 - 1&2 (cigarette & match), BS (58kg/m3 CMHR Foam), UNI 9175 Class EN 13501-1 Adhered Class D, s1, d0, BS BS 7176 Medium Hazard when FR treat EN 13501-1 Adhered Class B, s1, d0 wh d0 when FR treated, BS 5867-2 Type B The Furniture and Furnishing (Fire) (Sa IMO FTP Code (Part 8)
Light Fastness	5 (ISO 105 - BO2)
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Guarantee	10 Years

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use steam or professionally dry clean.

317

uffs

Rapidly renewable and compostable

pendently certified to ≥50,000 Martindale cycles

S 7176 Low Hazard, NF D 60-013, ÖNORM B 3825 & A 3800-1 sse 1 IM, BS 476 Part 7 Class 1 (Adhered) S 5852 Ignition Source 5 when FR treated ated, BS 476 Part 6 Classs 0 when FR treated (Adhered) when FR treated, EN 13501-1 Un-adhered Class D, s2, B Curtains & Drapes when FR treated, Safety), Regulations 1988 (Domestic Cigarette and Match),

Graddan Flax

Deeply textured and thickly woven, it effortlessly blends comfort with style to bring irresistible tactility and visual detail to both task and soft seating.

KNOLL

CRA11

BRAF

CRA20





BRACKEN CRA03

MILLSTONE

CRA07

MARSH CRA04


CLASS D



WOLD CRA15



CAVE CRA06



SCREE CRA10



TREK CRA18



SWALE CRA09



GRAVEL CRA08

CAMIRA - CRAGGAN FLAX

ttttt	TETTE	11111	********
	11111	11111	
\$1\$1\$	141414	****	****
HHH	HHH	<u> </u>	HHHH
****	<u> </u>	*****	
	HHH	H HH	
\$ # \$#	*****	****	
	HHH	141414	
****	414741	t;;;;;;	444444
Hill		THE	
	*****	****	1.1.4.4.4.4.4

ESKER CRA21

CAMIRA - CRAGGAN FLAX

PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating / Curtai
Composition	85% Wool, 10% Flax, 5% Polyamide
Environmental	Certified to Indoor Advantage [™] Gold Contains wool and bast fibre
Width	140 cm minimum
Weight	630g/m2 ±5% (882g/lin.m ±5%)
Abrasion Resistance	Heavy duty / 10 year guarantee Inde
Flammability	EN 1021 - 1&2 (cigarette & match), E UNI 9175 Classe 1 IM, ÖNORM B 3825 The Furniture and Furnishing (Fire S
Light Fastness	5 (ISO 105 - B02)
Fastness to Rubbing	Wet: 3/4, Dry: 4 (ISO 105 - X12)
Guarantee	10 Years

Cleaning

Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning use steam or professionally dry clean. Full details can be found in our cleaning and disinfection guide.

*Results from abrasion testing are highly variable and are therefore not a reliable indicator of the wear performance of the fabric. All independen certification is supported by a 10 year durability guarantee. Internally we specify this product at >40,000 cycles which we believe is realistic fo repeatability of testing. The stated technical and environmental performance of a fabric may be affected by the post treatment applied.

Product guarantees for the post treatment of fabrics undertaken by Camira are guaranteed for 5 years. Please note that seam performance is dependent on seam construction, needle and thread type. We recommend that appropriate sewing advice be taken. Batch to batch shade variations may occur within commercial tolerances. We reserve the right to alter technical specifications without notice. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.



ains

d, Environmental Product Declaration - Natural Fabric Composition

dependently certified to ≥50,000 Martindale cycles

BS 7176 Low & Medium Hazard, BS 5852 Ignition Source 5, 5 & A 3800-1 (over CMHR 58kg/m3 foam), IMO FTP Code (Part 8) Safety) Regulations 1988 (UK domestic cigarette andmatch)



Renewable Plant and Wool





CRA (TSR5)

Oceanic

Oceanic is a fabric born of the Seaqual Initiative designed to combat marine plastic pollution and achieve a waste free environment.





CORAL 00C05



JETSAM 00002



ATOLL 00006



FLOTSAM 00C01



BARRIER 00C07




PADDLE 00C13



RIPTIDE 00C14

CAMIRA - OCEANIC

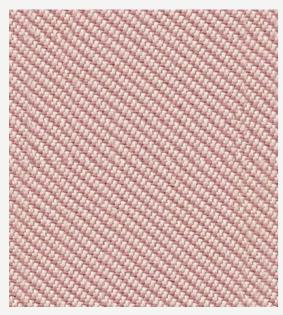

SEAFARER 00C16

CAMIRA - OCEANIC

PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating
Composition	100% post-consumer recycled p
Environmental	Certified to the EU Ecolabel Certified to 0EK0-TEX® Standar Certified to Indoor Advantage™ Made from 100% post-consume Non metallic dyestuffs
Width	140 cm minimum
Weight	497 g/m2 ±5% (696g/lin.m ±5%)
Abrasion Resistance	Heavy duty / 10 year guarantee.
Flammability	EN 1021 - 1&2 (cigarette & match BS 7176 Low Hazard Optional: Please specify when or BS 5852 Ignition Source 5 with E BS 7176 Medium Hazard with Em Note: Flammability performance what substrates have been used their complete furniture meets t
Light Fastness	5 (ISO 105 - BO2), OOC16: 4/5 (IS
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Bleach Cleanable	ISO 105 EO3 colour change 4 for
Cleaning	Vacuum regularly. Wipe with a da For deeper cleaning use steam, Can be washed at 60°C.
Guarantee	10 Years







Cigarette & Match

Bleach Cleanable







polyester, including 50% SEAQUAL yarn

ard 100 ' Gold er recycled polyester

e. Independently certified to ≥100,000 Martindale cycles

ch)

ordering

EnviroFlam5 nviroFlam5

e is dependent on components used. Our certificates show ed in our tests. For composite tests customers must ensure the necessary standards.

ISO 105 - BO2)

or dilution factor 1:4 chlorine solution.

damp cloth using proprietary upholstery shampoo/soap. bleach, alcohol or professionally dry clean.



Washable





Relate

A dense directional weave that unites two different unicoloured yarns which seemingly melt together.





961



271













Colors may slightly vary due to photographic lighting sources or your monitor settings.

Kvadrat - Rel	ATE		
771	881	691	791
191	181	171	381
641	671	571	561
611	371		

KVADRAT - RELATE

PRODUCT SPECIFICATIONS

Application	Offices, hotels, institutions, domestic similar regulation in other states of No upholstery in USA.
Composition	100% Trevira CS
Vidth	App. 55 inches (140 cm).
Veight	App. 14.4 oz/ly (450 g/lin.m).
Abrasion	App. 80,000 rubs acc. to the Martinda
lammability	AS/NZS 3837 Class 2. ASTM E84 class with treatment. DIN 4102 B1. EN 1021-1, NF P 92 507 M1. NFPA 701. SN 198 898 ÖNORM B1/Q1. (Copy of test report ava
Light Fastness	(ISO) 5-7. Pilling (EN ISO) 4-5. Fastness
Fastness to Rubbing	Dry note 4-5 ISO 105-X12, Wet note 4-
Sound Absorption	(EN ISO 354) 0.50/Class D (flat), 0.70/
irflow	2241 Pa s/m. EN 29053
Pilling	Note 4-5, EN ISO 12945
Guarantee	10 Years
Physical properties	Pilling Class 4-5 Breaking Strength warp 276 / weft 29 Seam Slippage warp 83 / weft 89 lbs.
invironmental venefits	EU Ecolabel compliant No use of halogen-based flame retard Free of intentionally added PFAS Mono-material designed for circularity REACH compliant Californian Proposition 65 list complian LBC Red list compliant
Green building sertificates	Greenguard Gold: Low chemical emissi Environmental Product Declaration (EF ISO 14025 & EN 15804. Developed in ac European standard EN 15804+A2. Health Product Declaration (HPD): Dec

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid. Also washable at 60-80°C, half wash load. Drip drying. Mount in moist condition. Shrinkage app. 2% at 60°C. Be aware of increased shrinking and creasing the higher the temperature.



341

use. Great durability. In accordance with California AB2998 or North America, this product should not be used for residential

ale method. EN ISO 12947.

A. ASTM E84 class B adhered. BS 5852 Crib 5. BS 5852 part 1 I/2. EN 13501 B-s1, d0. IMO FTP Code 2010: Part 8. NF D 60 013. 5.2. UNI 9175 1IM. UNI 9177 classe 1. US Cal. Bull. 117-2013. ailable).

ss to rubbing (ISO) dry 4-5, wet 4-5.

-5 ISO 105-X12

/Class C (waved).

95 lbs.

dants (incl. brominated and chlorinated)

ant

ion PD): 3rd Party Verified. accordance with the

claring textile content and substance



Colors may slightly vary due to photographic lighting sources or your monitor settings.

Main Line Fax

A new inherently flame retardant fabric from sustainable sources with strong, long and smooth fibres.


CAMIRA - MAIN LINE FLAX ALPERTON LAMBETH MLF43 MLF08 BARKING ALDGATE MLF45 MLF01 BLACKWALL NORTHFIELDS MLF46 MLF40 CHIGWELL EMBANKMENT MLF48 MLF50 EPPING CLAPHAM MLF51 MLF49



LEYTON MLF13



KILBURN MLF06



BARBICAN MLF03



TOWER MLF36



BROMPTON MLF35



BALHAM MLF44



PARSONS MLF14



BRIXTON MLF47



WATERLOO MLF21



VICTORIA MLF19

Camira - Main Lin	IE FLAX			Camira - Main Lii		
WESTMINSTER MLF22	BAYSWATER MLF24	STANMORE MLF37	PIMLICO MLF34	PERIVALE MLF59	STOCKWELL MLF15	KEN MLF
HOLBORN MLF05	NEWBURY MLF10	Monument Mlf09	GREENWICH MLF52	PINNER MLF60	BANK MLF23	ARC MLF
BETHNAL MLF25	HARROW MLF54	HORNCHURCH MLF55	HAMPSTEAD MLF53	Camden MLF26	Richmond MlF62	TEM MLF
GREENFORD MLF32	TUFNELL MLF18	Farringdon MLF29	KENTISH MLF56	STRATFORD MLF64	WATFORD MLF65	WHI MLF
MOORGATE MLF57	WOODFORD MLF67	GOLDHAWK MLF31	TOOTING MLF17			



Kensington //LF07



RCHWAY ILF02



emple 1lf16



/HITECHAPEL 1LF66



Morden Mlf12



REDBRIDGE MLF61



SHADWELL MLF63



EDFWARE MLF28

CAMIRA - MAIN LINE FLAX



UPMINSTER MLF20



CAMIRA - MAIN LINE FLAX

PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating / Curtair
Composition	75% Virgin Wool, 25% Flax
Environmental	Certified to the EU Ecolabel Certified to Indoor Advantage™ "Gold Rapidly renewable and compostable.
Width	140 cm minimum
Weight	437 g/m2 ±5%
Abrasion Resistance	Heavy duty / 10 year guarantee. Inde
Flammability	EN 1021 - 1&2 (cigarette & match), BS BS 7176 Medium Hazard, NF D 60-013 UNI 9175 Classe 1 IM, BS 5867-2: Type The Furniture and Furnishing (Fire) (S
Light Fastness	5 (ISO 105 - BO2)
Fastness to Rubbing	Wet: 3, Dry: 4 (ISO 105 - X12)
Guarantee	10 Years
	•

Cleaning Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use steam or professionally dry clean.

ns
d" . Made from wool and bast fibre.
ependently certified to ≥50,000 Martindale cycles
8 7176 Low Hazard, BS 5852 Ignition Source 5 3, ÖNORM B 3825 & A 3800-1 (58kg/m3 CMHR Foam) e B Curtains & Drapes, IMO FTP Code (Part 8) Safety) Regulations 1988 (Domestic Cigarette and Match)

Vita

ARTIFICIAL LEATHER

High-quality articial leather with a subtle surface grain effect and full matt appearance.





LEMON ITA33



AMPLIFIED ITA52



FLAMINGO ITA34



WISTERIA ITA49



CLASH ITA56

Camira - Vita —				Camira - Vita —		
BUBBLES ITA36	Porcelain Ita15	SAIL ITA54	Marina Ita21	HIPPO ITAO7	CHIFFON ITA44	oati Itao:
NAVY ITA22	SURF ITA48	BREEZE ITA32	WATERFALL ITA18	GOLDEN ITA39	Taupe Ita10	ESPF ITA14
Sapphire Ita16	PEACOCK ITA19	Spring Ita40	AVOCADO ITAO6	BEETLE ITA47	Noir Ita12	
OLIVE ITA09	YUCCA ITA30	SEAL ITAO1	SEAWEED ITA31			WRE ITA2
BONE ITA38	SWAN ITA42	Pigeon Ita45	KOALA ITAO4			



ATMEAL A02



SPRESSO TA14



ALPACA ITA46




AMERICANO ITA13



Vreath Ta29

CAMIRA - VITA

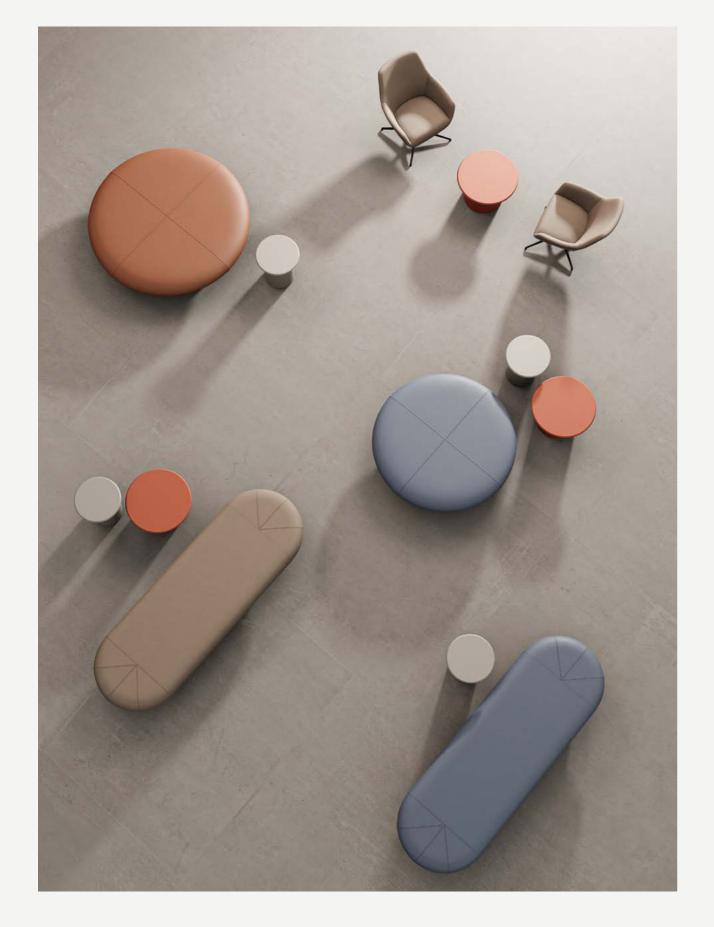

CAMIRA - VITA

PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating
Composition	Surface: 98% PVC, 2%. PU Substrate:
Width	140 cm minimum
Weight	850 g/m2 ±5%
Abrasion Resistance	Heavy duty / 5 year guarantee ISO 54
Flammability	EN 1021 - 1&2 (cigarette & match), BS BS 7176 Medium Hazard, BS 5852 Ign The Furniture and Furnishing (Fire) (S IMO FTP Code (Part 8)
Flexes	ISO 7854 Method B 400,000 Flexing o
Light Fastness	6 (ISO 105 - B02)
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Bleach cleanable	ISO 105 E03 colour change 4 for dilut
Waterproof	Hydrostatic head BS 3424 Part 26 > '
Urea resistance	BS 3424 Part 19 no significant deterio
Anti-microbial	AATCC 147
Guarantee	5 Years

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use bleach or alcohol.

e: 100% Cotton

5470-2 100,000 rubs (Grade 2 minimum)

BS 7176 Low Hazard, BS 5852 Ignition Souce 5 gnition Source 7 (with interliner), UNI 9175 Classe 1 IM (Safety) Regulations 1988 (Domestic Cigarette and Match)

cycles / 5 year guarantee (full details available)


ution factor 1:4 chlorine solution.

• 1 metre

rioration after 24 hrs

Fox

A selection that takes its elegance from calm and simple colours and makes a difference with its texture.

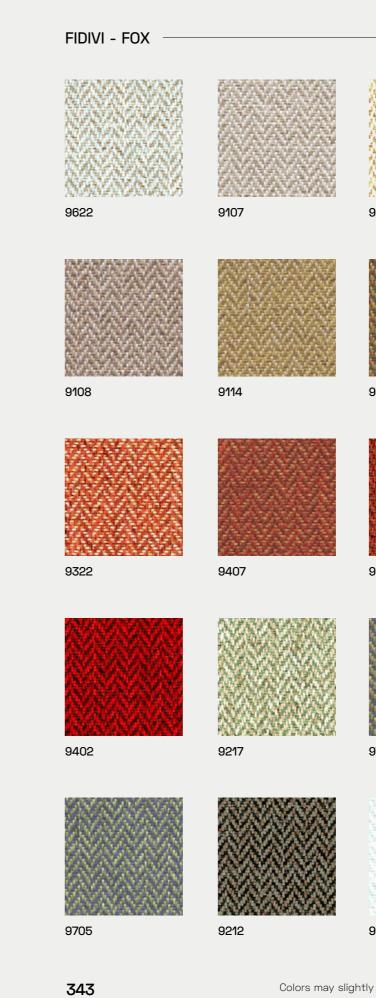



9113



9302



9312



9706



9106



9202





9412



9702



9616



9804



9703

FIDIVI - FOX

PRODUCT SPECIFICATIONS

Description	Yarn dyed 2 color melange fabric
Application	Office, Contract
Weight	525 ± 5 % g/ml 350 ± 5 % g/m²
Height	150 ± 2 % cm
Composition	100% Polyester Trade Mark Trevir
Abrasion Resistance	ISO 12947/2 120.000 ± 10 % Rubs
Light Fastness	ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8
Fastness to Rubbing	ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5
Pilling (2000 rubs)	ISO 12945-2 5 Tolerance: from 4 to 5
Acoustic Performances	ISO 9053 (Air flow)
Fire Resistance	UNI 9174 Class 1 can meet UNI 9175 Class 1 IM can meet DIN 4102 Class B1 NF P 92 501-7 Class M1 NF D 60013 Class AM18 can meet EN 1021-1 & 2 BS 5852 Crib 5 BS 7176 Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 c California TB 117:2013 can meet USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery
Certifications	Oekotex Euflower - Ecolabel
Warranty	5 Years
Cleaning and Washing	



c. Wool handtouch, fishbone design, in 22 colorways		
ira CS		
rt can meet	Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	





Laser J

The intense fabric experience comes with its attentive design.


FIDIVI - LASER J


















CLASS C






















FIDIVI - LASER J			
6020	6071	6098	5096
5003	7025	7021	8015
7014	8027	8078	8017



8033

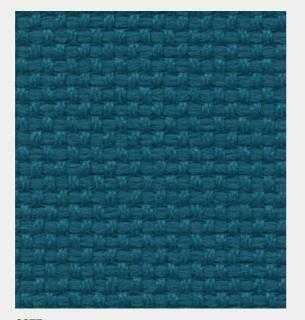

6075



PRODUCT SPECIFICATIONS

Fabric in 34 united colors
Office, Contract
735 ± 5 % g/ml 525 ± 5 % g/m²
140 ± 2 % cm
100% Polyester Trevira CS
ISO 12947/2 150.000 ± 10 % Rubs
ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8
ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5
ISO 12945-2 5 Tolerance: from 4 to 5
ISO 9053 (Air flow) ISO 354 (Reverberation Room), O
UNI 9174 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF P 92 501-7 M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS 5852 Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 c California TB 117:2013 USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery
Trademark Trevira B1 certificate MOQ 250m
0ekotex Euflower - Ecolabel
5 Years



),8	
can meet	Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.






Sivertex

A serene and dynamic touch meets with high quality artificial leather thanks to its broad spectrum.



CLASS C

SPRADLING - SILVERTEX				SPRADLING - SILV	ERTEX	
FOREST	BOTTLE	BASIL	PISTACH0	SISAL	CHAMPAGNE	BEI0
122-5063	122-5010	122-5020	122-5008	122-1051	122-1078	122
	IN STOCK			IN STOCK	IN STOCK	
CELERY	SAGE	AUBERGINE	RASPBERRY	SANDSTONE	TAUPE	SHI
122-5019	122-5009	122-7001	122-2016	122-0002	122-0009	122
		IN STOCK			IN STOCK	
RUBIN	WINE	UMBER	RED	MOCCA	PLATA	STE
122-6004	122-2064	122-1014	122-2011	122-0005	122-4001	122
					IN STOCK	
SUNKIST	Mandarin	SAFRAN	MELON	STORM	GRAPHITE	CAF
122-2012	122-6061	122-6065	122-6062	122-4002	122-4003	122
ORANGE	LUGGAGE	ICE	CREAM	BRICK	DEEPSEA	GO.
122-0013	122-0073	122-4004	122-1077	122-9243	122-3352	122
00.0						

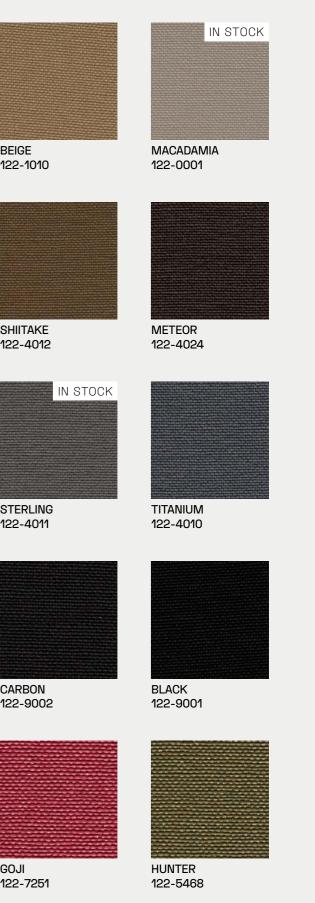

Colors may slightly vary due to photographic lighting sources or your monitor settings.



SPRADLING - SILVERTEX

PRODUCT SPECIFICATIONS

Composition:	Topcoat :Vinyl Backing;
Weight:	685 gr/m2
Width:	min. 137 cm
Roll size:	+/- 30m
Abrasion:	>300.000 cycles (MARTI
	EN 1021 Part 1 & 2 DIN 4
Flame retardancy*:	IMO 2010 FTP Part 8 UN
	NF P 92-503 / M2 EN 71
Cold Crack:	-29°C
UV-Resistance:	ISO 105 B02: ≥ 7/8 (Blue
	*This term and any corrected tests indicated and show material under actual fire
	FINISHES AND TREAT
	ISO 18184:2019: Coated F
Virucidal Activity	presence of Coronavirus
	ISO 21702:2019: All the C
	reducing the Coronavirus ISO 22196:201 I. Value of
Bacteriostatic Properties:	** Testing was conducte coronaviridae family, stru
	** Testing was conducte Staphylococcus aureus
WARRANTY	5 Years. Terms and cond
	• The vinyl should be clear build-up of dirt and com
	• Any stain, spills, or soili permanent staining.
CARE AND CLEANING	 Vinyl fabrics treated wi their good looks. Use so to remove stains on the
	• Lacquers, strong clean immediate damage and cleaners is at the owner

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. SPRADLING International GmbH, SPRADLING UK Ltd, and EURO SPRADLING S.L.U will not assume responsibility for dye transfer caused by external contaminants and possible permanent staining caused by this phenomenon.

PERMABLOK3® and SILVERTEX® are registered trademarks of Sprading Holdings, Inc.® | Hi-Loft2™ is trademark of Spradling Holdings, Inc.®

100% Polyester Hi-Loft2™

INDALE)

4102 B2 | MED | ECE R 1 18.02 Anx. 6,7 & 8

II 9175 Classe I.IM | UNE 23.727-90 IR/M.2

1-2:2006+ A1:2007 | FMVSS 302

Wool Scale) | ISO 104 B04: ≥ 4/5 (Grey Scale) esponding data refer to the typical performance in the specific uld not be construed to imply the behavior of this or any other e conditions.

IMENTS PERMABLOK3®

Fabrics treated with PERMABLOK3® are proven to reduce the ** by more than 90% within one hour of contact.

coated fabrics treated with PERMABLOK3® are capable of s** activity by 99,9% within 24 hours of exposure on the surface. antibacterial*** activity R>2.

ed with material exposed to Feline Coronavirus (same uctures and mechanisms similar to SARS-Cov2)

ed with material exposed to Staphylococcus aureus, (MRSA), Escherichia coli and Klebsiella pneumoniae.

litions apply, Warranty conditions are displayed on our website.

aned periodically in order to maintain its appearance and prevent taminants.

ing should be cleaned up promptly to prevent the possibility of

ith PERMABLOK3[®] require a minimum of maintenance to retain oft soapy solutions or special cleaning products for vinyl fabrics surface of the material. Remove only with a damp white cloth.

ers, detergents, xylene-based solutions, acetone, or MEK cause contribute to the deterioration of the material. The use of such 's risk.

Aspect

A subtle mélange, textured fabric with a warm soft handle, balancing superior flammability performance and a natural aesthetic.





AMALFI ACT02



MARRAKECH ACT03



CALABRIA ACT06



RAINER ACT24



JASPER ACT21

Colors may slightly vary due to photographic lighting sources or your monitor settings.



PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating
Composition	75% Trevira® CS Flame Retardant Poly
Environmental	Certified to 0EK0-TEX® Standard 100 Certified to Indoor Advantage™ "Gold"
Width	140 cm minimum
Weight	320 g/m2 ±5%
Abrasion Resistance	Heavy duty / 10 year guarantee. Indep
Flammability	EN 1021 - 1&2 (cigarette & match), BS (over CMHR 50kg/m3 foam), BS 7176 I NF D 60-013 (Over 50kg/m3 CMHR foa UNI 9175 Classe 1 IM
Light Fastness	5 (ISO 105 - BO2)
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Bleach cleanable	ISO 105 EO3 colour change 4 for diluti
Guarantee	10 Years
	1

Cleaning Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C.





OTAGO ACT25



yester, 25% Polyester. Non metallic dyestuffs.

ependently certified to ≥50,000 Martindale cycles

3S 7176 Low Hazard, BS 5852 Ignition source 5 3 Medium Hazard (over CMHR 50kg/m3 foam), DIN 4102 B1, oam), ÖNORM B 3825 & A 3800-1 (over CMHR 58kg/m3 foam),

tion factor 1:4 chlorine solution.

UUest

Woven entirely from post-consumer recycled plastic, this lightly textured, multi-application textile brings a touch of the ocean's natural beauty to commercial interiors.





MUSSEL QUE04



LIMPET QUE09



SEA GRASS QUE13



URCHIN QUE17



BEACH COMBER QUE21



CAMIRA - QUEST

PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating / Pa
Composition	100% post-consumer recycled po
Environmental	Certified to the EU Ecolabel Certified to 0EK0-TEX® Standard Certified to Indoor Advantage™ G Made from 100% post-consumer Non metallic dyestuffs
Width	137 cm minimum
Weight	330 g/m2 ±5% (452g/lin.m ±5%)
Abrasion Resistance	Heavy duty / 10 year guarantee.
Flammability	EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard UNI 9175 Classe 1 IM BS 476 Part 7 Class 1Y (Adhered) EN 13501-1 Adhered Class B, s1, o EN 13501-1 Un-adhered Class B, s Optional: Please specify when ord BS 5852 Ignition Source 5 with E BS 7176 Medium Hazard with Envir IMO FTP Code (Part 8) with Envir Note: Flammability performance what substrates have been used their complete furniture meets t
Light Fastness	4-6 (ISO 105 - B02)
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Bleach Cleanable	ISO 105 E03 colour change 4 for
Acoustic	Acoustically transparent. Acoust
Cleaning	Vacuum regularly. Wipe with a da For deeper cleaning use steam, b Can be washed at 60°C.
Guarantee	10 Years







EU Ecolabel : AT/016/007

Shirley www.oeko-tex.com



anel

oolyester including 75% SEAQUAL® YARN

rd 100 Gold er recycled polyester

. Independently certified to ≥100,000 Martindale cycles

dO s1, d0 rdering EnviroFlam5 viroFlam5 iroFlam5 e is dependent on components used. Our certificates show ed in our tests. For composite tests customers must ensure the necessary standards.

dilution factor 1:4 chlorine solution

tic graphs available upon request

lamp cloth using a proprietary upholstery shampoo/ soap. bleach, alcohol or professionally dry clean.







With Treatment



Bleach Cleanable

Washable

Year Guarantee

RePlay

Inspired by sportswear, it blends a futuristic knitted look with two-tone micro details, offering flexibility, performance, and sustainable design made from 100% post-consumer recycled polyester.


CAMIRA - REPLAY FLEX AGILE REP01 REP02 JOG FLIP REP05 REP06 HANDSTAND STEP REP10 REP09 SKIP HOP REP13 REP14 LIFT ROLL

REP18

REP17



ATHLETIC REP03




Joy Repo7



FREESTYLE REP11



pull Rep15



fun Rep19



RUN REP04



CHEER REP08




Motion Rep12



PUSH REP16



PLAY REP20

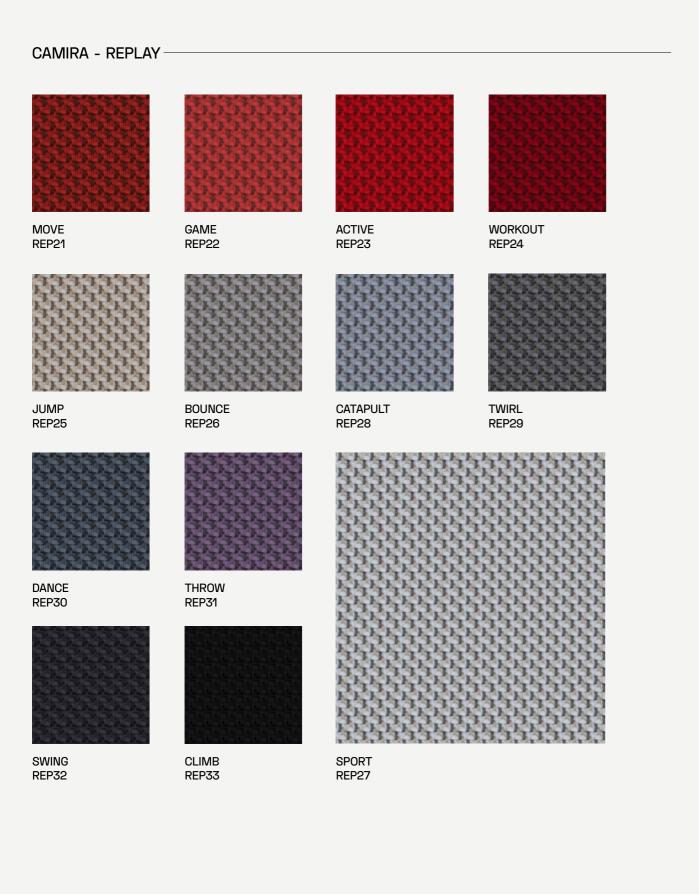

CAMIRA - REPLAY

PRODUCT SPECIFICATIONS

Composition	100% Post-Consumer Recycled Flame
Width	140 cm minimum
Weight	380 g/m2 ±5% (532 g/lin.m ±5%)
Abrasion Resistance	Heavy duty / 10 year guarantee Indep
Flammability	EN 1021 - 1 (cigarette), EN 1021 - 2 (m BS 7176 Medium Hazard, DIN 4102 B1, I (over CMHR 58kg/m3 Foam), UNI 9175 EN 13501-1 Un-adhered Class B, s1, d0
Light Fastness	4-6 (ISO 105 - BO2)
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Bleach Cleanable	ISO 105 EO3 colour change 4 for diluti
Acoustic Properties	Acoustically transparent. Acoustic gra
Guarantee	10 Years

Cleaning

Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/ soap. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C. Full details can be found in our cleaning and disinfection guide.



e Retardant Polyester

pendently certified to ≥100,000 Martindale cycles

match), BS 7176 Low Hazard, BS 5852 Ignition Source 5, , NF D 60-013, ÖNORM B 3825 & A 3800-1, 5 Classe 1 IM, EN 13501-1 Adhered Class B, s1, d0, 0, NF P 92-507 M1.

tion factor 1:4 chlorine solution.

raphs available upon request





Acoustic





Washable





100 11-62664 Shirley

With Treatment



Vilano

Combining the feeling of ease and peace with its carefully selected colours.

CLASS B

























Fidivi - Milano —			
9407	9734	9709	9725
9702	9607	9691	9614
9656	9613	9698	9629

9695

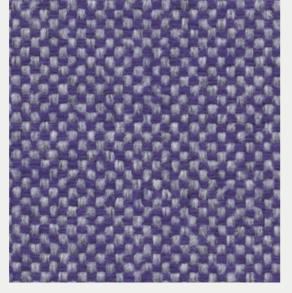

9506



PRODUCT SPECIFICATIONS

Description	Full wool-like appearance and ha
Application	Office, Luggage, Contract
Weight	525 ± 5 % g/ml 375 ± 5 % g/m²
Height	140 ± 2 % cm
Composition	100% Polyester Trevira CS
Abrasion Resistance	ISO 12947/2 80.000 ± 10 % Rubs
Light Fastness	ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8
Fastness to Rubbing	ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5
Pilling (2000 rubs)	ISO 12945-2 5 Tolerance: from 4 to 5
Acoustic Performances	ISO 354 (Reverberation Room), 0,
Fire Resistance	UNI 9174 Class C1 can meet UNI 9175 Class 1 IM can meet DIN 4102 Class B1 NF P 92 501-7 M1 NF D 60013 Class AM18 can meet EN 1021-1 & 2 BS 5852 Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 c California TB 117:2013 can meet USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery
Stain Repellent Treatment	Trademark Trevira B1 certificate MOQ 250m
Certifications	Oekotex Euflower - Ecolabel
Warranty	5 Years
Cleaning and Washing	



andtouch. 34 yarn dyed combinations

0,65	
et can meet	Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.





Roccia


The world's favorite thanks to its perfect harmony of elegance and diversity.






















Fidivi - Roccia —			
8504	5512	8515	5502
6506	6522	6517	6536
6055	6526	6505	6503
6502	6501	7504	7503
7502	7501	7016	7512

FIDIVI - ROCCIA







FIDIVI - ROCCIA

PRODUCT SPECIFICATIONS


Description	Yarn dyed 2 color melange fabric. Wool handtouch in 42 natural colorways.		
Application	Office, Contract		
Weight	350 ± 5 % g/ml 250 ± 5 % g/m ²		
Height	140 ± 2 % cm		
Composition	100% Polyester Trade Mark Trevira CS		
Abrasion Resistance	ISO 12947/2 70.000 ± 10 % Rubs		
Light Fastness	ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8		
Fastness to Rubbing	ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5		
Pilling (2000 rubs)	ISO 12945-2 5 Tolerance: from 4 to 5		
Acoustic Performances	ISO 354 (Reverberation Room), 0,6		
Fire Resistance	UNI 9174 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF P 92 501-7 M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS 5852 CRIB 5 BS 7176 Class Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 California TB117 USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery		
Certifications	Oekotex Euflower - Ecolabel		
Warranty	5 Years		
Cleaning and Washing			



Colors may slightly vary due to photographic lighting sources or your monitor settings.

Time

The timeless beauty of charmful colours and fresh feelings.





















Fidivi - Time —			
6031	6034	6018	6026
的成于中国的现在分词的行为中国的行为	这些新闻的代码的地址和国际发展时间	CARACTERS AND A SECTOR OF POST OF A 1990	

FIDIVI - TIME

PRODUCT SPECIFICATIONS

Description	Recycled polyester melange fabr Piece dyed in 28 colorshades.
Application	Office, Furniture, Contract
Weight	490 ± 5 % g/ml 350 ± 5 % g/m ²
Height	140 ± 2% cm
Composition	100% Polyester - Recycled GRS
Abrasion Resistance	ISO 12947/2 100.000 ± 10% Rubs
Light Fastness	ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8
Fastness to Rubbing	ISO 105-X12 4/5 (grey scale) Tolerance: from 5 to 8
Pilling (2000 rubs)	ISO 12945-2 5 Tolerance: from 5 to 8
Fire Resistance	UNI 9175 Class 1 IM EN 1021-1 & 2 BS 5852 CRIB 5 part 2 BS 7176 Class Medium Hazard California TB 117-2013
Certifications	Oekotex GRS
Warranty	5 Years
Cleaning and Washing	10 I C 10





pric.	
	Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.




Valencia

ARTIFICIAL LEATHER

An unique and attractive aesthetic with the combination of high-quality artificial leather and vibrant colors.

SPRADLING - VALENCIA IN STOCK LOTUS TEAL 107-2119 107-2113 ULTRA VIOLET CASHMERE 107-2118 107-2117 CHESTNUT ROSÉ 107-2115 107-2114 SKYLIGHT NIGHT 107-2108 107-2107 SAFRAN MELONE 107-6013 107-6012

CLASS B



PETROL 107-5065



PURE WHITE 107-9607



TOMATO 107-2112





107-6019



WARM GREY 107-4044



CAMEL 107-2116




SQUASH 107-2111



SONNE 107-2020



107-6003

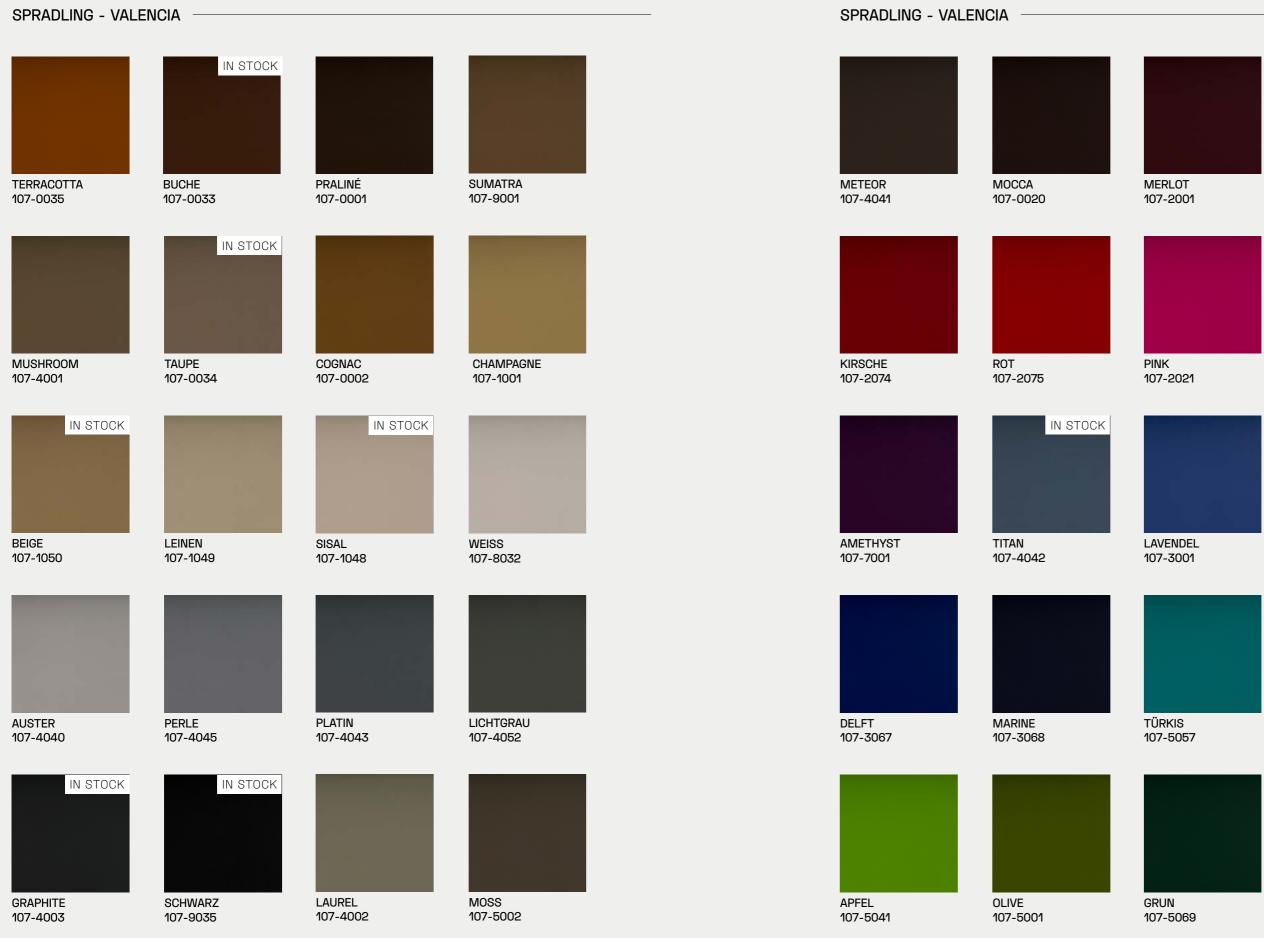



PORT 107-2062



BERRY 107-2002



BALTIC 107-3069



JADE 107-5056



SILVER 107-4020

Spradling - V	ALENCIA		
IVORY 107-1020	PEARLESSENCE 107-8020	AZURE 107-0370	CACTUS 107-8438
CLOUD 107-5032	EUCALYPTUS 107-6438	EVEREST 107-2008	FUNGI 107-2522
MISTY 107-8415	PEACH 107-9245	PINE 107-5451	SCUBA 107-0337

SPRADLING - VALENCIA

PRODUCT SPECIFICATIONS

Composition:	Topcoat :Vinyl Backing;
Weight:	650 gr/m2
Width:	min. 137 cm
Roll size:	+/- 30m
Abrasion:	>300.000 cycles (MARTIN
	EN 1021 Part 1 & 2 DIN 44
Flame retardancy*:	IMO 2010 FTP Part 8 UNI
	NF P 92-503 / M2 EN 71
Cold Crack:	-23°C
UV-Resistance:	1000 hours: ≥ 6 Blue woo
	*This term and any correct tests indicated and shout material under actual fire
	FINISHES AND TREATI
	Except Valencia Pure Whi
Virucidal Activity	ISO 18184:2019: Coated Fa presence of Coronavirus*
	ISO 21702:2019: All the Co reducing the Coronavirus
	ISO 22196:201 I. Value of
Bacteriostatic Properties:	** Testing was conducted coronaviridae family, stru
	*** Testing was conducte Staphylococcus aureus (
WARRANTY	5 Years. Terms and condi
	The vinyl should be clear build-up of dirt and cont
	• Any stain, spills, or soilir permanent staining.
CARE AND CLEANING	 Vinyl fabrics treated with their good looks. Use sof to remove stains on the
	• Lacquers, strong cleane immediate damage and c cleaners is at the owner?

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. SPRADLING International GmbH, SPRADLING UK Ltd, and EURO SPRADLING S.L.U will not assume responsibility for dye transfer caused by external contaminants and possible permanent staining caused by this phenomenon.

PERMABLOK3[®] is a registered traderark of Sprading Holdings, Inc.[®] | Hi-Loft2[™] and VALENCIA[™] are trademarks of Spradling Holdings, Inc.®

AVOCADO	
107-2110	

100% Polyester Hi-Loft2™

NDALE)

102 B2 | MED | ECE R 1 18.02 Anx. 6,7 & 8

9175 Classe I.IM | UNE 23.727-90 IR/M.2

-2:2006+ A1:2007 | FMVSS 302

ol scale

sponding data refer to the typical performance in the specific Ild not be construed to imply the behavior of this or any other e conditions.

MENTS PERMABLOK3®

ite 107-9607 that has PERMABLOK3® Plus

abrics treated with PERMABLOK3® are proven to reduce the ** by more than 90% within one hour of contact.

pated fabrics treated with PERMABLOK3® are capable of s** activity by 99,9% within 24 hours of exposure on the surface. antibacterial*** activity R>2.

d with material exposed to Feline Coronavirus (same ictures and mechanisms similar to SARS-Cov2)

ed with material exposed to Staphylococcus aureus, (MRSA), Escherichia coli and Klebsiella pneumoniae.

itions apply, Warranty conditions are displayed on our website.

aned periodically in order to maintain its appearance and prevent taminants.

ng should be cleaned up promptly to prevent the possibility of

th PERMABLOK3[®] require a minimum of maintenance to retain t soapy solutions or special cleaning products for vinyl fabrics surface of the material. Remove only with a damp white cloth.

ers, detergents, xylene-based solutions, acetone, or MEK cause contribute to the deterioration of the material. The use of such 's risk.

Loop

A modern touch on traditional design elements. First sight impression, combined with a colourful yarn blend when looking more closely.

LOOP		
		000000000000000000000000000000000000000
02	04	19
24	28	29
30	21	27
41	44	08
48		



9



9



7



8



23











LOOP



39

LOOP

PRODUCT SPECIFICATIONS

Technical Informations	Unit	Value	Test Method
Weight	gr/m²	509 (± %5)	BS EN ISO 12127:1998
Thickness	mm	1,4	
Width	cm	140 (± %5)	
Roll Meter	mt	50 (± %5)	
Resistance to Abrassion		40.000	EN ISO 12947-2
Seam Slippage	mm	Weft 3-4 / Warp 3-4	ISO 13936-2
Pilling	2000 cycle	5	ISO 12945-2
Colour Fastness to Light		5	TS EN ISO 105-B2
Composition		%28 ACR %56 COT %4 LIN %12 PES	

图 全 0 5 12

Product Characteristics

Only valid for Loop colour codes.

• It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.

The detergent must not include oxide bleach and bleach.

 There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.

• The product should not be exposed to direct sunlight.

• The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result. • While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.

• The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.

• All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.

• Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents). • Dry cleaning methods are also recommended for such stains.

Vacuum cleaner can be used on daily and weekly basis.

Please get a confirmation about stocks.

• The using place and purpose of the product should be conventionally accepted places and purposes.

• No liability can be accepted for products that are not used properly.

• The information stated above is of reliable common values. Please ask for special values of the contract.

Era

A subtle, two tone polyester fabric containing stretch in both directions for ease of upholstery.



CLASS A



LIFETIME CSE03



SPAN CSE05



CALENDAR CSE19



PRIME CSE09



RANGE CSE42



OCCASION CSE32



TURN CSE26



DATE CSE24



ALLOWANCE CSE38




MATURITY CSE40

NOTATION CSE36REST CSE37AEON CSE20EVERLASTING CSE10	
STAGEPERIODENDURANCETIMELAPSECSE15CSE07CSE34CSE16	
EVENTSIGNATUREANALOGUEPROMPTCSE18CSE35CSE33CSE45	
GENERATIONOCCURENCEHISTORYMEMOCSE02CSE23CSE21CSE46	
QUOTA CSE41FORECAST CSE11PRESENT CSE13YOUTH CSE39	

CAMIRA - ERA

LATE CSE43 ELAPSE CSE44



F

PRODUCT SPECIFICATIONS

Application	Task Seating / Soft Seating
Composition	100% Polyester
Environmental	Certified to 0EK0-TEX® Standard 100 Certified to Indoor Advantage™ "Gold" Non metallic dyestuffs
Width	140 cm minimum
Weight	320 g/m2 ±5%
Abrasion Resistance	Heavy duty / 10 year guarantee. Indep
Flammability	EN 1021 - 1&2 (cigarette & match), BS EN 13501-1 Adhered Class B, s1, d0, EN BS 7176 Medium Hazard with EnviroFla
Light Fastness	5 (ISO 105 - BO2)
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Bleach cleanable	ISO 105 EO3 colour change 4 for diluti
Guarantee	10 Years

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C.



FUTURIST CSE01

lependently certified to ≥100,000 Martindale cycles

BS 7176 Low Hazard EN 13501-1 Un-adhered Class C, s1, d0 Flam5

ution factor 1:4 chlorine solution.

Xtreme

A modern crepe weave fabric made from 100% post-consumer recycled polyester.

CAMIRA - XTREME ADOBO ARUBA YS165 YS108 SOMBRERO SOLANO YS046 YS072 BELIZE PANAMA YS105 YS079 TOBAGO BRIDGETOWN YS030 YS102 BLUEBELL HONEYMOON YS097 YS035



SANDSTORM YS071



TORTUGA YS168



DIABLO YS101



TAROT YS084



OCEAN YS100



NOUGAT YS091



LOBSTER YS076



TOKARA YS136




PARASOL YS073



CAYMAN YS024

Camira - Xtremi	E			
STEEL YS095	MARTINIQUE YS004	SCUBA YS082	CURACAO YS005	
COSTA YSO26	APPLE YS096	MADURA YS156	LOMBOK YS159	
APPLEDORE YS077	TABOO YS045	CAMPECHE YS074	TONGA YS160	
WINDJAMMER YS047	KRABI YS141	BLIZZARD YS081	RUM YS173	
OSUMI YS171	Bonaire YS172	PADANG YS145	HAVANA YSO09	

CAMIRA - XTREME

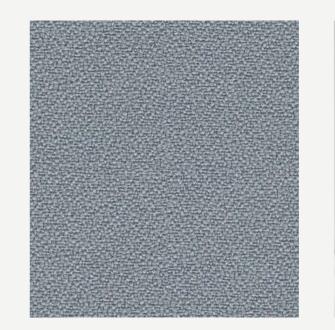

SLIP YS094

PRODUCT SPECIFICATIONS

Application	Task Seating
Composition	100% post-consumer recycled polyes
Environmental	Certified to the EU Ecolabel, Certified Certified to Indoor Advantage™ "Gold" Non metallic dyestuffs
Width	140 cm minimum
Weight	310 g/m2 ±5%
Abrasion Resistance	Heavy duty / 10 year guarantee. Inde
Flammability	EN 1021 - 1&2 (cigarette & match), BS BS 7176 Medium Hazard, DIN 4102 B1, (over 58 kg/m3 CMHR foam), UNI 9175
Light Fastness	6 (ISO 105 - BO2)
Fastness to Rubbing	Wet: 4, Dry: 4 (ISO 105 - X12)
Bleach cleanable	ISO 105 E03 colour change 4 for dilut
Guarantee	10 Years

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C.



ster

ed to OEKO-TEX® Standard 100, "Made from 100% recycled polyester

ependently certified to ≥100,000 Martindale cycle

3S 7176 Low Hazard, BS 5852 Ignition Source 5, 1, NF D 60-013 ,ÖNORM B 3825 & A 3800-1 75 Classe 1 IM, BS 476 Part 7 Class 1

tion factor 1:4 chlorine solution.

Colors may slightly vary due to photographic lighting sources or your monitor settings.

Athena

A mix of polyester and cotton, suitable for upholstery with prestigious colours and soft touch.





1162



1229















1140

1198



ATHENA

PRODUCT SPECIFICATIONS

Technical Informations	Unit
Composition	60% polyester, 40% cotto
Weight	gr/m²
Width	cm
Resistance to Abrasion	cycles
Colour Fastness to Light	bw
Colour Fastness to Rubbing	wet dry
Roll Length	m

Liquid Stains

Blot the liquid stain gently with a high-absorbent material. Pat dry the area gently with a dry material to remove the remaining humidity (cotton cloth, paper towel, etc), If the stain from the spill remains, remove the stain with a soapy cloth without diffusing the stain. After each rubbing motion, refresh the clean soapy cloth in order to prevent soiling.

Solid Particles

Romove the excess soiling with ultimate care without diffusing. Remove the solid particle from the fabric surface with the help of a soft spatula. To remove dust, use a vacum cleaner or a soft brush. The remaining stains should be removed by rubbing with a soapy cloth in circular motion.


Ball-Point Pen and Similar Difficult Stains

Dampen a clean cotton cloth in a white soap solution. Rub the stain off gently. Clean the surface with the damp cloth and leave the fabric for drying.

Alcohol Derives

Petroleum and alkali based solvents should not be used for cleaning. After all cleaning processes, the drying should be done with a low temperature blow dryer in large circular motion or the fabric should be left for natural drying. After drying, misoriented and damaged piles should be fixed with a soft brush.


Valid for all colors. Red colors may have less color fastness to rubbing.

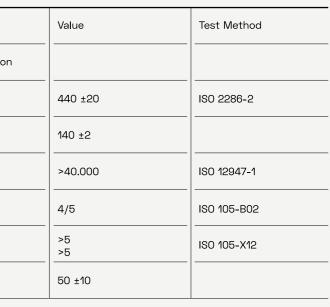

Canyon

ARTIFICIAL LEATHER

High abrasion resistant and flame retardant high-quality easy to clean artificial leather with a genuine leather look.

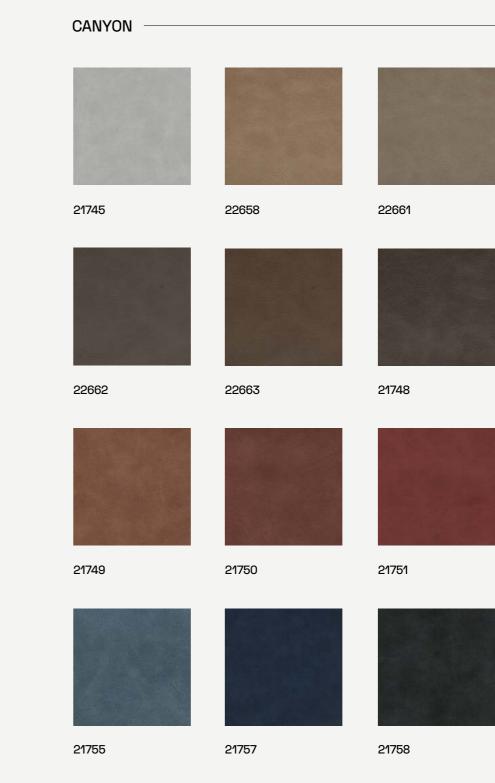

CLASS A



21747





21754

CANYON



21728



Colors may slightly vary due to photographic lighting sources or your monitor settings.

406

CANYON

PRODUCT SPECIFICATIONS

Technical Informations	Unit
Composition	80% pvc, 18% polyester, %
Weight	gr/m²
Thickness	mm
Width	cm
Roll Length	m
Resistance to Abrasion	martindale
Tensile Strength (Lenght)	n
Tensile Strength (Across)	n
Elongation Strenght	
Colour Fastness to Light	
Flammability	

Product Characteristics

• Only valid for Canyon colour codes.

• The cleaning process should start around the stain and held without dispersing the stain. It should be cleaned by gently wiping. • You can wipe off ballpoint pen stains with 20% ethanol. For other stains such as coffee, tea, milk, cosmetics, jam, syrup, fruit juice 40c lukewarm water, neutral cleaning agents and sponge can be used.

• In oil and grease stains, the stain can be wiped of with the help of a brush after the chalk powder is used for covering the stain.

 The shoe polish stain can be removed with perchloroethlene or 10% diluted ammonia. • All kinds of real and artificial leather should not be cleaned with bleach, detergent, coloured soap and similar materials and the product should not be exposed to direct sunlight. It should be kept away from sources of strong light (spot, etc.) and heat. • There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.

• All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining. Please get a confirmation about stocks.



New King

ARTIFICIAL LEATHER

Easy to clean artificial leather made of a special PVC and polyurethane mix with the support of polyester base lining.



409



13719



13725



62502



17567





Colors may slightly vary due to photographic lighting sources or your monitor settings.

NEW KING		
13822	17565	
24328	17560	13591
17568	13727	
		-



Colors may slightly vary due to photographic lighting sources or your monitor settings.

NEW KING

PRODUCT SPECIFICATIONS

Technical Informations	Unit
Composition	76% pvc, 22% polyester, 2
Weight	gr/m²
Width	cm
Roll Length	m
Resistance to Abrasion	mantindale
Bursting Strength	
Elongation Strength	warp weft
Resistance to Seam Slippage	warp weft
Flammability	
Light Fastness	

Product Characteristics

Only valid for New King colour codes.

• Our Atlantis product line has flame retardancy feature.

• The cleaning process should start around the stain and held without dispersing the stain. It should be cleaned by gently wiping. • All kinds of real and artificial leather should not be cleaned with bleach, detergent, coloured soap and similar materials and the product should not be exposed to direct sunlight.

. The product should be kept away from sources of strong light (spot, etc.) and heat. • The using place and purpose of the product should be conventionally accepted places and purposes. No liability can be accepted for products that are not used properly.

· Leather products should not be kept in plastic packaging and humid places for a long time. Solid objects such as toys and jewellery may cause unintended starches on the material.

· Leather-covered products should be placed at least 50 cm away from heat sources (stoves, radiators, fireplaces, etc.). Otherwise, the leather may lose moisture which may cause undesired cracks.

· Impacts, scratches, etc. that may occur due to transportation and external. should be considered out of warranty. Direct contact of pets with leather goods should be prevented.

• Protect the leather from harsh blows.

• Since ink on newspapers or magazines may get on the product and leave a permanent stain, do not leave it on the product. Especially if you sit with new jeans that give dark coloured paint on light coloured leather as an example, there may be stains. Note that this stain is not caused by the leather itself, but by the trousers that dye and colour.

• Weekly remove the dust or dirt on the surface of the product with a damp white and soft cotton cloth dampened with soapy water, rinse and dry when necessary.


• When coffee, tea, etc. spilled: Use a highly absorbent white cloth or paper. Do not delete it immediately! Make sure the stain is absorbed by the cloth or paper.

• Wipe off the remaining moisture with a soft cloth in circular motions. · Alcohol and cologne are not recommended for difficult stains such as ink, ballpoint pen, lipstick. Wipe with warm scapy water with gentle circular movements.

. There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.

· Please get a confirmation about stocks.

411

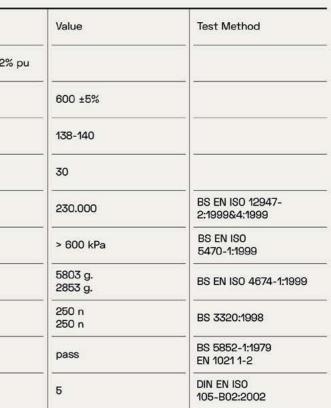

• Direct contact of the products with high surface temperature (iron, etc.) with the leather may cause a damage.

New Sabine

Water repellent and high-colored material with linen effect. NEW SABINE WHITE **IVORY** SILVER TAUPE PALE BROWN BROWN BEIGE RED MAROC CEMENT GREY GREEN GREY 413



TAN



STONE



CHOCO



APRICOT



NORDIC



SAND



SADDLE



WINE



KIWI







BLUE

BLACK



ANTRASIT



NEW SABINE

PRODUCT SPECIFICATIONS

Technical Informations	Unit	Limit	Value	Test Method
Composition	100% polyester			
Weight	gr/m²		380	ISO 3801
Width	cm		137	ISO 22198
Roll Meter	m		50	ISO 12947-2 ISO 1294
Resistance to Abrasion	martindale		40.000	BS EN ISO 12947-2
Tear Strength	n	warp weft	190 154	ISO 13937-2
Resistance to Seam Slippage	mm	warp weft	1-2 0-1	ISO 13906-2
Pilling	2000 dvr		4	ISO 12945-2
Light Fastness	_	dry wet	5 5	ISO 105-X12

Product Characteristics

Only valid for New Sabine colour codes.

• It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.

• The detergent must not include oxide bleach and bleach. There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.

• The product should not be exposed to direct sunlight.

• The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result. • While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.

• The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.

• All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining. • Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents). • Dry cleaning methods are also recommended for such stains.

· Vacuum cleaner can be used on daily and weekly basis. • The dark colours of this product, which is produced as ball painting, should be cleaned with a damp cloth after laying and afterwards, the paint crumbs that could remain between the textures. This process can be done several times if necessary.

• The product has a teflon feature. Please get a confirmation about stocks.

Nino

High abrasion resistant material, suitable for contract with a wool-like look and touch. NINO 135-135 35-135 133-38 69-38 143-12 147-12 22-27 22-147 24-24 87-87 417



17-135



18-72



143-87



27-147



69-87



18-17



38-38



52-27




130-32




72-24

NINO



09-24

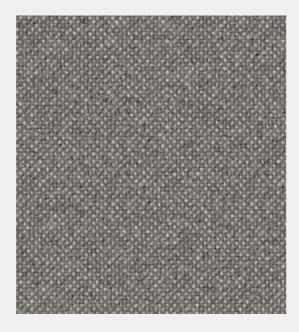

07-135



NINO

PRODUCT SPECIFICATIONS

Technical Informations	Unit	Value	Test Method	
Composition	100% polyester			
Weight	gr/m²	469 ±10%		
Width	cm	140 ±2		
Roll Meter	m	50		
Resistance to Abrasion	tour	70.000	ISO 12947-2:1998	
Light Fastness		4-5	ISO 105-X12:2001	
Pilling		4-5	ISO 12945-2:2000	

Product Characteristics

• Only valid for Nino colour codes.

• It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.

• The detergent must not include oxide bleach and bleach. There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally

accepted limits.

The product should not be exposed to direct sunlight.

• The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result. • While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.

• The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.

• All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining. • Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents). Dry cleaning methods are also recommended for such stains. · Vacuum cleaner can be used on daily and weekly basis.

Gana

Voluminous fabric with a 3D look emerging from opposite colour schemes. A balanced view in every space.

01-08
01-07
02-04
02-06

CLASS A



01-06



02-05



02-09



01-04



01-03



02-08

GANA



01-05

GANA

PRODUCT SPECIFICATIONS

Technical Informations	Unit	Value	Test Method
Weight	gr/m²	330 (± %5)	
Thickness	mm		
Width	cm	140	
Roll Meter	mt	50	
Resistance to Abrassion		40.000	EN ISO 12947-2
Tensile Strength	N	Weft-> 983 N Warp-> 953 N	EN ISO 13934-1
Tear Strength	N	Weft-> 81 N Warp-> 115 N	EN ISO 13937-3
Seam Slippage	mm	Weft-> 4,3 mm Warp-> 2,4 mm	EN ISO 13936-2
Pilling	2000 cycle	4-5	ISO 12945-2
Colour Fastness - WET		3-4	ISO 105-X12
Colour Fastness - DRY		4	ISO 105-X12
Colour Fastness to Light		4-6	ISO 105 B02
Composition		%77 PES %23 PAN	



Product Characteristics

• Only valid for Gana colour codes.

• It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.

 The detergent must not include oxide bleach and bleach. There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.

• The product should not be exposed to direct sunlight.

• The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result. • While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.

• The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.

• All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.

• Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents).

• Dry cleaning methods are also recommended for such stains. • Vacuum cleaner can be used on daily and weekly basis.

• Please get a confirmation about stocks.

• The using place and purpose of the product should be conventionally accepted places and purposes.

· No liability can be accepted for products that are not used properly.

• The information stated above is of reliable common values. Please ask for special values of the contract.

Twister

Durable and eye-pleasing fabric that adds inspiration to modern spaces.





9859



16059



5408



503



16060



1202







TWISTER



16054

TWISTER

PRODUCT SPECIFICATIONS

Technical Informations Unit		Value	Test Method	
Weight	gr/m²	507 (± %5)	BS EN ISO 12127:1998	
Thickness	mm	1,5		
Width	cm	140 (± %5)		
Roll Meter mt		40 (± %5)		
Resistance to Abrassion		50.000	EN ISO 12947-2	
Seam Slippage	mm	Weft 2-3 / Warp 2-3	ISO 13936-2	
Pilling	2000 cycle	4-5	ISO 12945-2	
Colour Fastness to Light		5 TS EN ISO 105-B2		
Composition		%13 COT %37 PES % 50 PP		

O A A A

Product Characteristics

Only valid for Twister colour codes.

• It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.

• The detergent must not include oxide bleach and bleach.

 There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.

• The product should not be exposed to direct sunlight.

• The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result. • While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.

• The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.

• All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.

• Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents). • Dry cleaning methods are also recommended for such stains.

Vacuum cleaner can be used on daily and weekly basis.

Please get a confirmation about stocks.

• The using place and purpose of the product should be conventionally accepted places and purposes.

• No liability can be accepted for products that are not used properly.

• The information stated above is of reliable common values. Please ask for special values of the contract.

FIOCCO

Featuring a distinctive bouclé texture, it is crafted from 100% Trevira CS polyester, making it an elegant and versatile choice for office and contract applications.





9801





9303



9404




9821

FIDIVI - FIOCCO			
9818	9808	9616	9626
9216	9636	9706	9606
9736	9707	9717	9205



9506

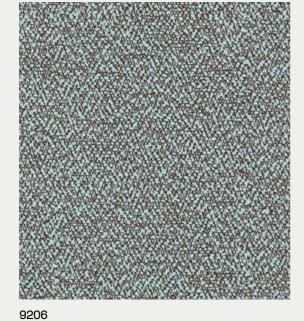

FIDIVI - FIOCCO

PRODUCT SPECIFICATIONS

Description	Slight colour differences betwee have to be considered within co
Weight	620 ± 5 % g/ml 440 ± 5 % g/m²
Width	140 ± 2 % cm
Composition	100% POLYESTER TREVIRA CS
Abrasion Resistance	ISO 12947-2 (Martindale) 120.000 ± 10 % Rubs
Light Fastness	ISO 105-B02 (Xenotest) 6 (blue scale) Tolerance: from 5 to 8
Fastness to Rubbing	ISO 105-X12 (Crockmeter) 4/5 (grey scale) Tolerance: from 4 to 5
Pilling (2000 rubs)	ISO 12945-2 5 Tolerance: from 4 to 5
Fire Resistance	UNI 9174 - 8456 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF 92501-7 Class M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 OENORM 3800-1 Class B1,01,TR1 California TB117 USA NFPA 701 USA NFPA 260 IMO Part 8 Upholstery
Certifications	Oekotex Euflower - Ecolabel
Warranty	5 Years
Cleaning and Washing	



en one lot and anothe
ommercial tolerance

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.





Colors may slightly vary due to photographic lighting sources or your monitor settings.

Plain Nelange

Water repellent, stain resistant and mildew resistant fabric, designed to furnish indoor and outdoor spaces.

Only for Sole Collection.

CLASS A





835



072



879



876



833



018



693



079








583

Colors may slightly vary due to photographic lighting sources or your monitor settings.

IRISUN - PLAIN MELANGE

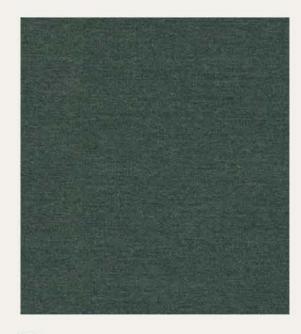

874



IRISUN - PLAIN MELANGE

PRODUCT SPECIFICATIONS

•	
Yarn	100% solution dyed
Width	137 cm
Roll length	30 m
Weight	240 gr/m ²
Martindal	15000 cycles
Finishing	Water repellent, and
Oil-repellency	5 off 8
Spray Test	5 off 5
UV Colour fastness	7 off 8
Colour fastness to weather	7 off 8
Colour fastness after washing at 40°C	5 off 5
Flame resistance	CAL TB 117 - 2013 S
Warranty	5 years
Tolerance	± 5%
Care	See the ISO symbol
Biocides	It contains biocidal



d acrylic ti-stain and anti-mould treatment Section 1 I agent with approved active substances: Octyl Isothiazolinone

Bogota

REAL LEATHER

Real leather that has a pigmented and protective top coat with a soft handle and a silky matt finish.

CLASS HD1



















BOGOTA



8371



BOGOTA

PRODUCT SPECIFICATIONS

Test	Method	Result	
Colour fastness to rubbing			
Nr. 500 dry rubs	IUF 450/UNI EN ISO 11640	>= 4 grey scale	
Nr. 150 wet rubs	IUF 450/UNI EN ISO 11640	>= 4 grey scale	
Nr. 80 alkaline pH 8	IUF 450/UNI EN ISO 11640	>= 4 grey scale	
Flexing endurance	IUP 20 / UNI EN ISO 5402	ISO 5402 >= 30.000	
Tear strength	IUP 40 / UNI EN ISO 3377-1	>= 20 N	
Adhesion	IUF 470 / UNI EN ISO 11644	>= 3.50 N/cm	
Light resistance (xenon test)	IUF 402 / UNI EN ISO 105-B02	5 blue scale	
Fire resistance	UNI EN ISO 1021-1/2 BS 5852 1991 Sec. 4 NI/0-1 California T.B. 117	Pass Pass Pass	

Product Characteristics

• Avoid placing leather near direct sunlight.

Keep the leather away from heat sources.

• Dust regularly with a soft and dry cloth.

• If a spill should occur, blot immediately with a clean absorbent cloth or sponge.

• For deeper cleansing use a lightly damp cloth with natural soap. Do not saturate.

• Do not rub. Use a circular motion and clean the entire surface.

 $\boldsymbol{\cdot}$ Using a soft and dry cloth, dry immediately after the treatment.

• Never use household cleaning agents, furniture polishes, ammonia, bleach, varnish, oils or similar. • If you wish to use specifically made creams or lotions for leather upkeep and care feel please consult specialized companies and leather professionals who supply such sets. If you need recommendations on who to consult, we are happy to indicate.

All our leathers comply with the strict regulations and EU Directives covering the use and presence of PCP, CFC, Chromo VI, Dimethylfumarate (DMF) and Azo dyestuffs during the tanning process. Due to the natural properties of leather colour variations between one dye lot and another may occur.

This technical specification sheet replaces any copies in your possession. The values indicated in this sheet refer to the leather at the time of supply. Once the leather has been processed, cut, marked we can no longer guarantee the same values.

Considering the natural aspect of this product and unpredictable related factors, we reserve the right to change the indicated specifications at any time without prior notice.

Important Note

Please note that leather is natural material that becomes soft and stretches over time.

BOGOTA

UPHOLSTERY CATEGORIES

	BRAND	NAME	ТҮРЕ	COMPOSITION	MARTINDALE	FLAMMABILITY
	CAMIRA	ERA	FABRIC	100% Polyester	100.000	En 1021 - 1&2 (Cigarette & Match) Optional: Bs 5852 Ignition Source 5 With Enviroflam5 (Crib5)
	CAMIRA	XTREME	FABRIC	100% Polyester	100.000	En 1021 - 1&2 (Cigarette & Match) Optional: Bs 5852 Ignition Source 5 With Enviroflam5 (Crib5)
	SFC	ATHENA	FABRIC	60% Polyster, 40% Cotton	40.000	• Optional: Bs 5852 Part 1
	ALYA	CANYON	ARTIFICIAL LEATHER	80% Pvc, 18% Polyester, %2 Pu	100.000	• Bs 5852 Part 1
	ALYA	NEW KING	ARTIFICIAL LEATHER	76% Pvc, 22% Polyester, 2% Pu	230.000	• Bs 5852 Part 1
CLASS A	ALYA	NEW SABINE	FABRIC	%100 Polyester	40.000	• Optional: Bs 5852 Part 1
	ALYA	NINO	FABRIC	%100 Polyester	70.000	• Optional: Bs 5852 Part 1
	ALYA	GANA	FABRIC	%77 Pes % 23 Pan	40.000	• Optional: Bs 5852 Part 1
	ALYA	TWISTER	FABRIC	%13 Cot, % 37 Pes, % 50 Pp	50.000	• Optional: Bs 5852 Part 1
	FIDIVI	FIOCCO	FABRIC	100% Polyester Trade Mark Trevira Cs	60.000	En 1021 - 1&2 (Cigarette & Match) Bs 5852 Ignition Source 5 (Crib5)
	IRUSUN	PLAIN MELANGE	FABRIC	100% Solution dyed acrylic	15.000	• CAL TB 117 - 2013 Section 1
	CAMIRA	ASPECT	FABRIC	75% Trevira® Cs Flame Retardant Polyester, 25% Polyester	50.000	• En 1021 - 1&2 (Cigarette & Match)
	CAMIRA	QUEST	FABRIC	100% Post-Consumer Recycled Polyester Including 75% Seaqual® Yarn	100.000	• En 1021 - 1&2 (Cigarette & Match) • Optional: Crib5
	CAMIRA	REPLAY	FABRIC	100% Post-Consumer Recycled Polyester	100.000	En 1021 - 1&2 (Cigarette & Match) Optional: BS 7176 Low Hazard, BS 5852 Ignition Source 5, BS 7176 Medium Hazard
CLASS B	FIDIVI	MILANO	FABRIC	100% Polyester Trade Mark Trevira Cs	80.000	• En 1021 - 1&2 (Cigarette & Match) • Bs 5852 Ignition Source 5 (Crib5)
	FIDIVI	ROCCIA	FABRIC	100% Polyester Trade Mark Trevira Cs	70.000	• En 1021 - 1&2 (Cigarette & Match) • Bs 5852 Ignition Source 5 (Crib5)
	FIDIVI	TIME	FABRIC	100% Polyester - Recycled Grs	100.000	• En 1021 - 1&2 (Cigarette & Match) • Bs 5852 Ignition Source 5 (Crib5)
	SPRADLING	VALENCIA	ARTIFICIAL LEATHER	Vinyl / Urethane Topcoat Topcoat: Vinyl - Backing: 100% Polyester Hi-Loft²™	300.000	• En 1021 - 1&2 (Cigarette & Match)
	ALYA	LOOP	FABRIC	%28 Acr, %56 Cot, %4 Lin, %12 Pes	40.000	• Optional: Bs 5852 Part 1
	CAMIRA	MAIN LINE FLAX	FABRIC	75% Virgin Wool, 25% Flax	50.000	• Bs 5852 Ignition Source 5 (Crib5)
	CAMIRA	VITA	ARTIFICIAL LEATHER	Surface: 98% Pvc, 2%. Pu Substrate: 100% Cotton	100.000	• En 1021 - 1&2 (Cigarette & Match) • Bs 5852 Ignition Source 5 (Crib5)
	FIDIVI	FOX	FABRIC	100% Polyester Trade Mark Trevira Cs	120.000	• En 1021 - 1&2 (Cigarette & Match) • Bs 5852 Ignition Source 5 (Crib5)
CLASS C	FIDIVI	LASER J	FABRIC	100% Polyester Trade Mark Trevira Cs	150.000	En 1021 - 1&2 (Cigarette & Match) Bs 5852 Ignition Source 5 (Crib5)
	KVADRAT	RELATE	FABRIC	100% Trevira CS	80.000	• US Cal. Bull. 117-2013
	SPRADLING	SILVERTEX	ARTIFICIAL LEATHER	Vinyl / Urethane Topcoat Topcoat: Vinyl - Backing: 100% Polyester Hi-Loft²™	300.000	• En 1021 - 1&2 (Cigarette & Match)
	CAMIRA	CRAGGAN FLAX	FABRIC	85% Wool, 10% Flax, 5% Polyamide	50.000	En 1021 - 1&2 (Cigarette & Match) Optional: BS 7176 Low Hazard, BS 5852 Ignition Source 5, BS 7176 Medium Hazard
CLASS D	CAMIRA	BLAZER	FABRIC	100% Virgin Wool	50.000	EN 1021 - 2 (match)
	CAMIRA	OCEANIC	FABRIC	100% Post-Consumer Recycled Polyester, Including 50% Eaqual® Yarn	100.000	BS 7176 Low Hazard
LASS E	KVADRAT	REMIX 3	FABRIC	90% new wool, 10% nylon	100.000	• US Cal. Bull. 117-2013
	KVADRAT	STEELCUT 3	FABRIC	90% new wool, 10% nylon	100.000	• US Cal. Bull. 117-2013
CLASS F	KVADRAT	STEELCUT QUARTET	FABRIC	90% new wool, 10% nylon	100.000	• US Cal. Bull. 117-2013
	KVADRAT	STEELCUT TRIO 3	FABRIC	90% new wool, 10% nylon	100.000	• US Cal. Bull. 117-2013
CLASS HD1	ORION	BOGOTA	REAL LEATHER	-	-	Optional: UNI EN ISO 1021-1/2 Optional: BS 5852 1991 Sec. 4NI/0-1 Optional: California T.B 117

FABRIC COMPATIBILITY LIST



www.bt.design

	> NEW SABINE	ONIN A	P NEW KING	P CANYON	 XTREME CAMIRA 	P ERA CAMIRA	► ATHENA	P GANA	► TWISTER	A FIOCCO		B ASPECT CAMIRA	■ QUEST CAMIRA	a TIME FIDIVI	W VALENCIA SPRADLING	в ГООЬ	B MILANO FIDIVI	ш REPLAY		o FOX FIDIVI	ο LASER J FIDIVI	O SILVERTEX SPRADLING	o VITA CAMIRA	O MAIN LINE FLAX CAMIRA	o RELATE KVADRAT	DOCEANIC CAMIRA	BLAZER CAMIRA	- CRAGGANFLAX CAMIRA	m REMIX 3 KVADRAT	
ALEK CHAIR / LOUNGE			•	•	•	0	•		0	•			•	0	•	•	•	•	-	•	•						•	•		•
BOB	•	•	•	•	0	0	•	•	0	•	•	0	•	•	•	•	•	•	-		•	0			×	0	•	•	0	•
BOLD					0	0			0			0		0			•			•			0						0	
BONNY	•	•	•	•	•	0	•	•	0	•	•	0	•	0	•	0	•	•	_	•	•	•	•		0	•	•	•	×	•
BOOM SINGLE			•	0	0	0			0	•		0							-		•	0	0						0	
BOOM SOFA	•	•	•	0	0	0	•	•	0	•	•	0	•	•	•	•	•	•	-		0	0	0			0	•	•	0	•
BOOM POUF				0	0	0		•	0	•		0			•				-			0	0			0		•	0	
BOXER	•	•	•	0	0	0	•	•	0	•	•	0	•	•	•	•	•	•	-	•	•	•		•	•	•	•	•	•	•
DAISY CHAIR			•	•	•	0		•	0	•		0		×	•					0									×	•
DAISY LOUNGE			•	•	•	0	•	•	0	•	•	0	•	×	•	•	•	•	-							•	•	•	×	•
DANTE CHAIR / BAR	•		•	•	•	0	•	•	0	•	•	•	•	0	•	•	•	•	-	•	•					•	•	•	•	•
DIA 50	•	0	•	•	•	0	•	•	0	•	•	0	•	•	•	•	•	•	-		•					•	•	•	×	•
DION CHAIR	٠	•		•	•	0		•	0		•	٠	•	0	•											٠	•	٠		
DOT CHAIR / BAR	•	•	•	•	•	0	•	•	0	•	•	•	•	0	•	•	•	•	_			•				•	•	•		•
DRAGE	٠		•	0	0	0		•	0	•	•	0	•	٠	•											0		٠	0	
DUPONT CHAIR / LOUNGE / BAR						0			0			0		0				•	-	•										
DURGU	٠			0	0	0			0			0	•	X								0	0			0		٠	×	
FERNO	٠		•	0	0	0		•	0		•	0	•	0	•				_									•	×	•
FLINT				•	0	0			0		•	0	•	•	•			•										•	0	
GO LARGE	٠			0	0	0			0			0		٠					_			0	0			0		٠	×	
GRACE	٠				•	0			0	•	•		•	0	•			•	_									•	×	
ISOLA LOUNGE	•			0	0	0			0	•		0		0				•	-			0						•	×	
KAV				0	0	0		•	0	•	•	0		0	•			•	_				0			0		•	0	
LAMY CHAIR	٠		•	0	•	0		•	0	•		0		0					_										×	
LAMY LOUNGE				0	•	0		•	0	•		0		0									0						×	
LAMY POUF	٠			0	•	0			0			0		0									0					•	×	
LED	٠	٠		٠	0	0			0		٠	0	•	٠	٠						0	0			×	0	•	٠	0	
LOFT	٠			٠	0	0			0			0	•	٠					_		0			•		0	•	٠	×	
MABEL COMFORT	•				0	0			0			0	•								•	0					•	•	0	
MATT	٠				0	0			0			0	×	٠								0				٠	٠	٠	0	
MAY	٠		•	•	0	0		•	0	•	•	0	×	•	•								0			٠		٠	×	•
MENTOR CHAIR	٠		•		•	0			0	•		0		0					_				0		0				×	
METRIC	٠	٠		0	•						٠	٠	•	٠	•						•				0	٠	•	٠	0	
MIKA CHAIR / BAR STOOL	•	•	•	•	•	0	•	•	0	•	•	•	•	•	•	•	•	•		•		•	•	•	•	•	•	•	•	•
					0	0		0	0			0		×								0	0			0			×	

Suitable 🌘

Not reccomended by B&T O

Not suitable 🗙

* Please note that leather is a natural material that becomes soft and stretches over time.



BOGOTA	
HD1	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
•	
0	
•	

TEELCUT QUARTET KVADRAT
 STEELCUT 3 KVADRAT

• • 0 0 • • • •

0 0

• • • • • • • • • • • • • •

• • 0 0 • • • • 0 0 • • • •

• • • • • •

0 0 • • • • • • • • • • • •

- Suitable 🌘
- Not reccomended by B&T O but can be used on demand

MOST NODA ODIN CHAIR / BAR	NEW SABINE	ONIN A	NEW KING	 CANYON 	× XTREME CAMIRA	O O O P ERA CAMIRA	ATHENA	BANA	O O O V TWISTER	A LIOCCCO	B ROCCIA FIDIVI	O O B ASPECT CAMIRA	OUEST CAMIRA	α TIME FIDIVI	ALENCIA SPRADLING	B B	MILANO FIDIVI	B B REPLAY		● ● ○ FOX FIDIVI	C C	O O O SILVERTEX SPRADLING	O VITA CAMIRA	MAIN LINE FLAX CAMIRA	● ● ○ RELATE KVADRAT	O OCEANIC CAMIRA	BLAZER CAMIRA	CRAGGANFLAX CAMIRA	COOD REMIX 3 KVADRAT	STEELCUT TRIO 3 KVADRAT	STEELCUT QUARTET KVADRAT	C STEELCUT 3 KVADRAT
ORA	•	•	•	0	•	•	•	•	•	•	•	•	•	0	•	•	•	•		•	•	×	•	•	0	•	•	•	×	•	•	•
PERA CHAIR / LOUNGE / BAR			•	•	•	0	•	•	0			0	•	0	•	•		•		•	•	•	0			•		•			•	
PICK	•	•	•	•	0	0	•	•	0	•	•	0	•	•	•	•	•	•		•	•	0	•	•	•	•	•	•	0	•	•	•
PI					0	0			0			0			•					•	•	•							0		•	
PIU	•	•	•	•	0	0	•	•	0	•	•	0	•	•	•	•	•	•		•	•	0	•	•	•	•	•	•	0	•	•	•
POD				0														•		•		•	•			•			×		•	•
REGO PLAY	•	•	•	•	•	0	•	0	0	•	•	0	•	•	•	•	•	•		•	•	•	0	•	0	0	•	•	×	•	0	0
REGO CHAIR			•	•	•	0		•	0			0		•	•	•	•	•	4	•	•	•	0		0	•			×	•	•	
REGO LOUNGE	•	•	•	•	•	0	•	•	0	•	•	0	•	0	•	•	•	•		•	•	•	0	•	0	•	•	•	×	•	•	•
REST						0			0			0		0	•								0						0	•	•	•
ROLLER	•	•	•	•	0	0	•	•	0	•	•	0	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	0	•	•	•
ROUND / ROUND PRIVATES		0	•	0	0	0		•	0			0		0	•			•		•			0		0				X	•		•
SOLE CHAIR / BAR				0		0			0			0				•					•	•	0							•	•	•
SORBE						0									•	•					•	•							×	•		•
SPIRIT CHAIR						0			0			0											0						×			•
TO BE				0	0	0			0			0									•		0		0							
ZEN Sofa / Pouf			0	0	0			0	0			0								•	0	0	X		×	0			0	•	0	0
ZENGER					0	0			0		٠	0	٠								•								×		•	
ZONE	٠		•			0			0		٠	0	٠	0		•				•	•	•	0			•			×	•	•	•
																omende		ble	- '		se note	e that le erial th										

* Please note that leather is a natural material that becomes soft and stretches over time.

Not reccomended by B&T O

Not suitable 🗙



BOGOTA	
HD1	
•	
0	
0	
•	
•	
•	
•	
•	
•	

- Suitable 🌘
- Not reccomended by B&T O but can be used on demand