

B&T


FABRICS &
LEATHERS

Steelcut 3


A three-dimensional surface resembling small pyramids or steel points. Comes in bright, confident hues.

CLASS F

KVADRAT - STEELCUT 3



502



522



512



535




452




252




402




445



612




552



562



545



110



220



240




120




140



160



155



922

301

Colors may slightly vary due to photographic lighting sources or your monitor settings.

B&H

KVADRAT - STEELCUT 3



742



732



780



912



932



962



985




265




605



365



655



682




652




662



672




695



190




775



975

KVADRAT - STEELCUT 3

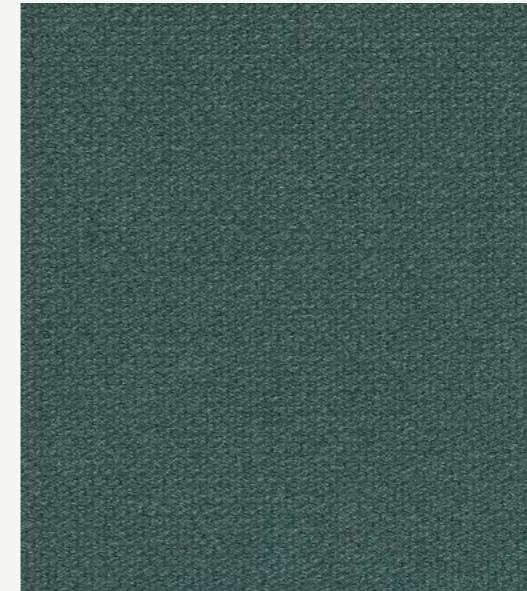

180

KVADRAT - STEELCUT 3



KVADRAT - STEELCUT 3

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|--|
| Application | Offices, hotels, institutions, domestic use. Great durability. |
| Composition | 90% new wool, worsted, 10% nylon. |
| Width | App. 55 inches (140 cm). |
| Weight | App. 825 g/lin.m, 26.6 oz/ly. |
| Abrasion Resistance | App. 100,000 rubs acc. to the Martindale method EN ISO 12947. |
| Flammability | AS/NZS 3837 class 2 • SN 198 898 5.3 with treatment • ASTM E84 Class A Unadhered • BS 5852 crib 5 with treatment • AS/NZS 1530.3 • UNI 9175 1IM • NFPA 260 • ASTM E84 Class B Adhered • ÖNORM B2/Q1 • IMO FTP Code 2010 Part 8 • BS 5852 part 1 • BS 7176 Low Hazard • EN 13501 B-s2, d1 with treatment • EN 1021-1/2 • US Cal. Bull. 117-2013 • NF D 60 013 |
| Light Fastness | [ISO] 5-6. |
| Fastness to Rubbing | Dry note 4-5 ISO 105-X12, Wet note 3-5 ISO 105-X12 |
| Sound Absorption | [EN ISO 354] 0.65/Class C [flat], 0.80/Class B [waved]. |
| Airflow | 1014 Pa s/m. |
| Pilling | EN ISO 3-4 |
| Guarantee | 10 Years |
| Physical properties | Pilling Class 4-5 Breaking strength warp 263 / weft 142 lbs. Seam slippage warp 127 / weft 58 lbs. |
| Environmental benefits | EU Ecolabel compliant Free of intentionally added PFAS REACH compliant Californian Proposition 65 list compliant LBC Red list compliant Healthier Hospitals compliant |
| Green building certificates | Greenguard Gold: Low chemical emission Environmental Product Declaration (EPD): 3rd Party Verified. ISO 14025 & EN 15804. Developed in accordance with the European standard EN 15804+A2. Health Product Declaration (HPD): Declaring textile content and substance |

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week.
Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary.
Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.




Steelcut Quartet


Softness, colour depth and durability. Has a sustainable profile and comes in optimistic, warm colourways

CLASS F

KVADRAT - STEELCUT QUARTET




414




434



924




554



534



544



224



354



644




664



654



684



114



144



154



764



394




994

307

Colors may slightly vary due to photographic lighting sources or your monitor settings.

KVADRAT - STEELCUT QUARTET

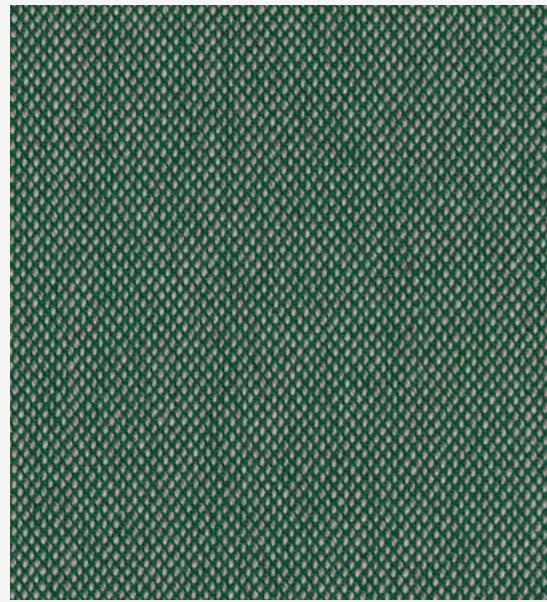

944

KVADRAT - STEELCUT QUARTET

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|--|
| Application | Offices, hotels, institutions, domestic use. Great durability. |
| Composition | 90% new wool, worsted, 10% nylon. |
| Width | App. 55 inches (140 cm). |
| Weight | 770 g/lin. m (24.8 oz/ly) |
| Abrasion Resistance | App. 100,000 rubs acc. to the Martindale method EN ISO 12947. |
| Flammability | AS/NZS 3837 class 2 • SN 198 898 5.3 with treatment • ASTM E84 Class A Unadhered • BS 5852 crib 5 with treatment • AS/NZS 1530.3 • UNI 9175 1IM • NFPA 260 • ASTM E84 Class B Adhered • IMO FTP Code 2010 Part 8 • ÖNORM B1/Q1 • BS 5852 part 1 • BS 7176 Low Hazard • EN 1021-1/2 • US Cal. Bull. 117-2013 • EN 13501 B-s2, d0 with treatment • NF D 60 013 |
| Light Fastness | (ISO) dry 4-5, wet 3-5. |
| Fastness to Rubbing | Dry note 4-5 ISO 105-X12, Wet note 4-5 ISO 105-X12 |
| Sound Absorption | [EN ISO 354] 0.70/Class C [flat], 0.95/Class A [waved]. |
| Airflow | 910 Pa s/m. EN 29053 |
| Pilling | Note 4-5, EN ISO 12945 |
| Guarantee | 10 Years |
| Physical properties | Pilling Class 4-5 Breaking strength warp 263 / weft 142 lbs. Seam slippage warp 127 / weft 58 lbs. |
| Environmental benefits | EU Ecolabel compliant No use of halogen-based flame retardants (incl. brominated and chlorinated) REACH compliant Californian Proposition 65 list compliant LBC Red list compliant Healthier Hospitals compliant |
| Green building certificates | Greenguard Gold: Low chemical emission Health Product Declaration (HPD): Declaring textile content and substance |

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.



Steelcut Trio 3

An uncoloured look
from a distance,
reveals different
nuances as the viewer
gets nearer.

CLASS F

B&F


KVADRAT - STEELCUT TRIO 3



636



553




526



686



666



515



506




645



466



436



533



576



446



453



213



246



616



205



226



236

KVADRAT - STEELCUT TRIO 3



716



713



796



756




865



746



883

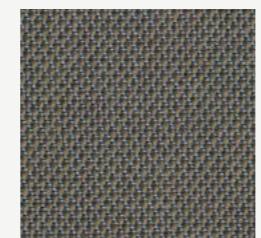

253



776



283



476



426



376



416



806




336




276



105

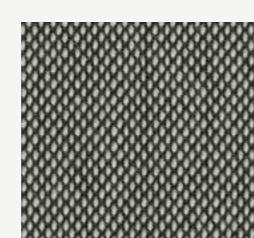


124

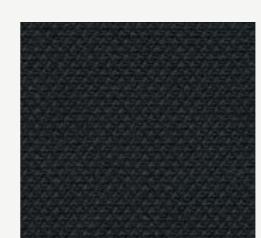


195


KVADRAT - STEELCUT TRIO 3



113



133




176



266



966



153



946



953




916



976



996




383



906

KVADRAT - STEELCUT TRIO 3

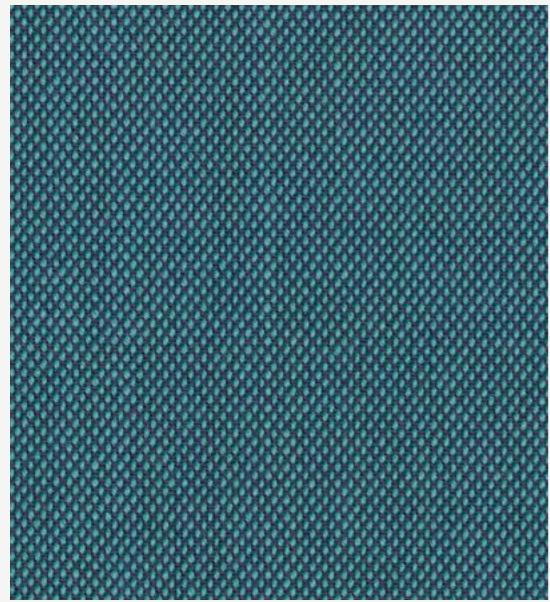

983

KVADRAT - STEELCUT TRIO 3

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|--|
| Application | Offices, hotels, institutions, domestic use. Great durability. |
| Composition | 90% new wool, worsted, 10% nylon. |
| Width | App. 55 inches (140 cm). |
| Weight | App. 24.9 oz/ly (770 g/lin.m). |
| Abrasion Resistance | App. 100,000 rubs acc. to the Martindale method EN ISO 12947. |
| Flammability | AS/NZS 3837 class 2 • SN 198 898 5.3 with treatment • ASTM E84 Class A Unadhered • BS 5852 crib 5 with treatment • AS/NZS 1530.3 • UNI 9175 1IM • NFPA 260 • ASTM E84 Class B Adhered • IMO FTP Code 2010 Part 8 • ÖNORM B1/Q1 • BS 5852 part 1 • BS 7176 Low Hazard • EN 1021-1/2 • US Cal. Bull. 117-2013 • EN 13501 B-s2, d0 with treatment • NF D 60 013 |
| Light Fastness | 5-7 ISO 105-B02 |
| Fastness to Rubbing | Dry note 4-5 ISO 105-X12, Wet note 3-5 ISO 105-X12 |
| Sound Absorption | [EN ISO 354] 0.70/Class C [flat], 0.95/Class A [waved]. |
| Airflow | 910 Pa s/m. EN 29053 |
| Pilling | Note 4, EN ISO 12945 |
| Guarantee | 10 Years |
| Physical properties | Pilling Class 4-5 Breaking strength warp 263 / weft 142 lbs. Seam slippage warp 127 / weft 58 lbs. |
| Environmental benefits | EU Ecolabel compliant No content of PFCs or 'PFAS' REACH compliant Californian Proposition 65 list compliant LBC Red list compliant Healthier Hospitals compliant |
| Green building certificates | Greenguard Gold: Low chemical emission Environmental Product Declaration (EPD): 3rd Party Verified. ISO 14025 & EN 15804. Developed in accordance with the European standard EN 15804+A2. Health Product Declaration (HPD): Declaring textile content and substance |

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid




Craggan Flax

Deeply textured and thickly woven, it effortlessly blends comfort with style to bring irresistible tactility and visual detail to both task and soft seating.

B&F

CAMIRA - CRAGGAN FLAX



KNOLL
CRA11



TALUS
CRA14




WOLD
CRA15



TREK
CRA18



BRAE
CRA20



LOCH
CRA19



CAVE
CRA06



SWALE
CRA09



MILLSTONE
CRA07



DRUMLIN
CRA12



SCREE
CRA10



GRAVEL
CRA08




BRACKEN
CRA03



MARSH
CRA04

CAMIRA - CRAGGAN FLAX

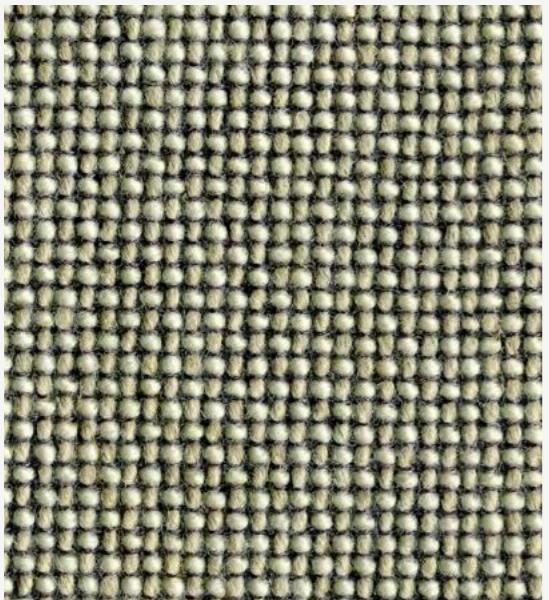ESKER
CRA21

CAMIRA - CRAGGAN FLAX

PRODUCT SPECIFICATIONS

| | |
|---------------------|--|
| Application | Task Seating / Soft Seating / Curtains |
| Composition | 85% Wool, 10% Flax, 5% Polyamide |
| Environmental | Certified to Indoor Advantage™ Gold, Environmental Product Declaration - Natural Fabric Composition Contains wool and bast fibre |
| Width | 140 cm minimum |
| Weight | 630g/m ² ±5% [882g/lin.m ±5%] |
| Abrasion Resistance | Heavy duty / 10 year guarantee Independently certified to ≥50,000 Martindale cycles |
| Flammability | EN 1021 - 1&2 (cigarette & match), BS 7176 Low & Medium Hazard, BS 5852 Ignition Source 5, UNI 9175 Classe 1 IM, ÖNORM B 3825 & A 3800-1 (over CMHR 58kg/m ³ foam), IMO FTP Code (Part 8) The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match) |
| Light Fastness | 5 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 3/4, Dry: 4 (ISO 105 - X12) |
| Guarantee | 10 Years |

Cleaning

Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/soap. For deeper cleaning use steam or professionally dry clean. Full details can be found in our cleaning and disinfection guide.

*Results from abrasion testing are highly variable and are therefore not a reliable indicator of the wear performance of the fabric. All independent certification is supported by a 10 year durability guarantee. Internally we specify this product at >40,000 cycles which we believe is realistic for repeatability of testing. The stated technical and environmental performance of a fabric may be affected by the post treatment applied.

Product guarantees for the post treatment of fabrics undertaken by Camira are guaranteed for 5 years. Please note that seam performance is dependent on seam construction, needle and thread type. We recommend that appropriate sewing advice be taken. Batch to batch shade variations may occur within commercial tolerances. We reserve the right to alter technical specifications without notice. The Unregistered Design Rights and the Copyright in all designs are the exclusive property of Camira Fabrics Limited.



Task seating



Soft seating



Cigarette & Match



Medium Hazard



IMO FTP Code (Part 8)



Year guarantee

camira circular
Camira CircularRenewable
Plant and WoolCERTIFIED
INDOOR AIR QUALITY
ASSEMBLEDVERIFIED
by SCS GLOBAL SERVICES
ENVIRONMENTAL
PRODUCT
DECLARATION
BASED ON LCA
CRA (TSR5)

Oceanic

Oceanic is a fabric born of the Seaqual Initiative designed to combat marine plastic pollution and achieve a waste free environment.

CAMIRA - OCEANIC




ABYSS
OOC10



AQUATIC
OOC12




CORAL
OOC05

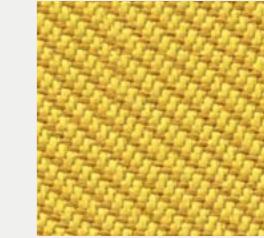


BARRIER
OOC07



SEA
OOC04



COAST
OOC03



JETSAM
OOC02




PADDLE
OOC13




GULF
OOC15



NEPTUNE
OOC11




ATOLL
OOC06

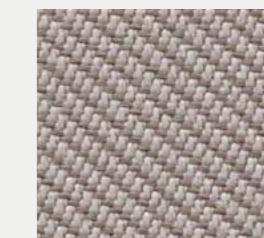


RIPTIDE
OOC14



BAY
OOC08




SHORE
OOC09



FLOTSAM
OOC01

CAMIRA - OCEANIC

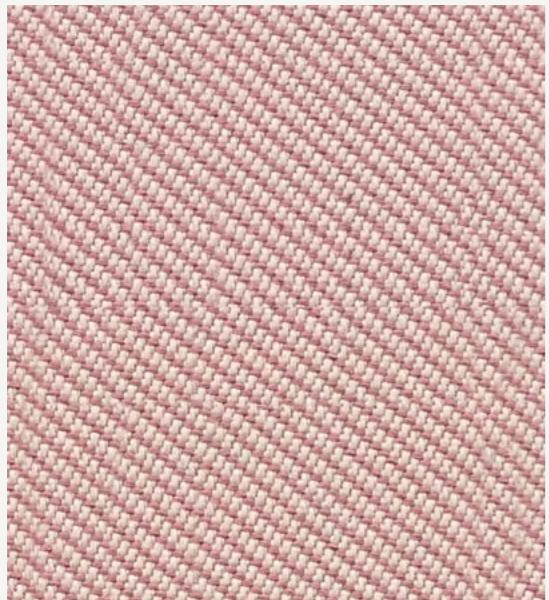

SEAFARER
OOC16

CAMIRA - OCEANIC

PRODUCT SPECIFICATIONS

| | |
|---------------------|---|
| Application | Task Seating / Soft Seating |
| Composition | 100% post-consumer recycled polyester, including 50% SEAQUAL yarn |
| Environmental | Certified to the EU Ecolabel Certified to OEKO-TEX® Standard 100 Certified to Indoor Advantage™ Gold Made from 100% post-consumer recycled polyester Non metallic dyestuffs |
| Width | 140 cm minimum |
| Weight | 497 g/m ² ±5% (696g/lin.m ±5%) |
| Abrasion Resistance | Heavy duty / 10 year guarantee. Independently certified to ≥100,000 Martindale cycles |
| Flammability | EN 1021 - 1&2 (cigarette & match) BS 7176 Low Hazard Optional: Please specify when ordering BS 5852 Ignition Source 5 with EnviroFlam5 BS 7176 Medium Hazard with EnviroFlam5 Note: Flammability performance is dependent on components used. Our certificates show what substrates have been used in our tests. For composite tests customers must ensure their complete furniture meets the necessary standards. |
| Light Fastness | 5 (ISO 105 - B02), OOC16: 4/5 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Bleach Cleanable | ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution. |
| Cleaning | Vacuum regularly. Wipe with a damp cloth using proprietary upholstery shampoo/soap. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C. |
| Guarantee | 10 Years |



Task Seating Soft Seating




Cigarette & Match



Environmental



Bleach Cleanable



Washable



10 Year
Guarantee



With Treatment
Medium Hazard



INDOOR ADVANTAGE GOLD
FURNITURE



EU Ecolabel
www.ecolabel.eu




STANDARD
100
11-62664
Shirley
www.oeko-tex.com

Remix 3

A tight, minimalistic weave, and derives its lively colour play from a combination of two different mélange yarns, which each combine up to three hues.

CLASS C

KVADRAT - REMIX 3



152



163



276



286



133




143



173



113




123



183



842



906



954



412



962



982



933



942




912



923

KVADRAT - REMIX 3



672



362



346



326



242




233



223



252

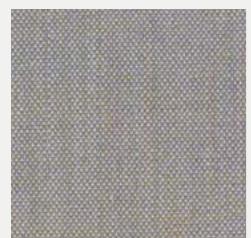

606




356




686




682

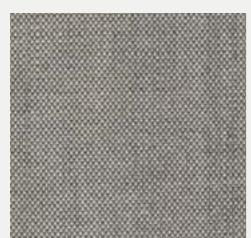

126



136



266



296



753



973



196



996

KVADRAT - REMIX 3



393



783



383



743



796



866



836



733



773



873



716



762



852



722



823



816



373



692



662



653

KVADRAT - REMIX 3



452


536



433



422

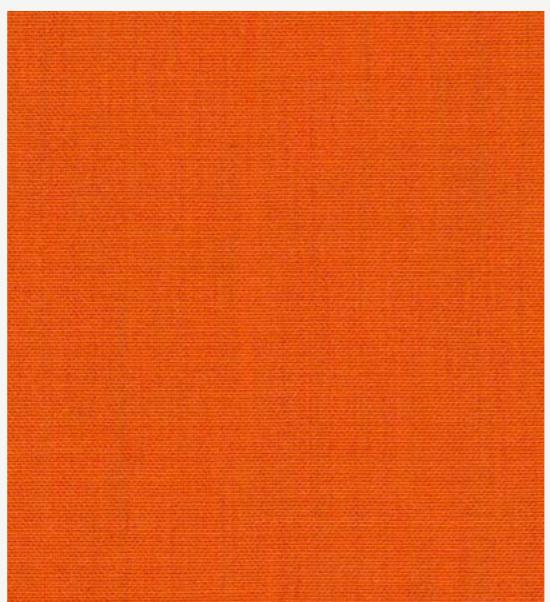

536



452

KVADRAT - REMIX 3

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|--|
| Application | Offices, hotels, institutions, domestic use. Great durability. |
| Composition | 90% new wool, worsted, 10% nylon. |
| Width | App. 55 inches (140 cm). |
| Weight | Approx. 420 g/lin.m, 13.6 oz/ly |
| Abrasion Resistance | App. 100,000 rubs acc. to the Martindale method EN ISO 12947. |
| Flammability | AS/NZS 3837 class 2 • IMO FTP Code 2010 Part 7 with treatment • SN 198 898 5.3 with treatment • ASTM E84 Class A Unadhered • BS 5852 crib 5 with treatment • AS/NZS 1530.3 • UNI 9175 1IM • NFPA 260 • IMO FTP Code 2010 Part 8 • ÖNORM B1/Q1 • GB 50222 B1 with treatment (Chinese) • BS 5852 part 1 • EN 1021-1/2 • ASTM E84 Class A Adhered • US Cal. Bull. 117-2013 • EN 13501 B-s2, d0 with treatment • NF D 60 013 |
| Light Fastness | Note 5-7 ISO 105-B02 |
| Fastness to Rubbing | Dry note 3-5 ISO 105-X12, Wet note 3-5 ISO 105-X12 |
| Sound Absorption | [EN ISO 354] 0.55/Class D (flat), 0.80/Class B (waved). |
| Airflow | 465 Pa s/m EN 29053 |
| Pilling | Note 4, EN ISO 12945 |
| Guarantee | 10 Years |
| Physical properties | Pilling Class 4 Breaking Strength warp 132 / weft 138 lbs. Seam Slippage warp 126.5 / weft 130 lbs. |
| Environmental benefits | EU Ecolabel compliant Free of intentionally added PFAS REACH compliant Californian Proposition 65 list compliant LBC Red list compliant Healthier Hospitals compliant |
| Green building certificates | Greenguard Gold: Low chemical emission Environmental Product Declaration (EPD): 3rd Party Verified. ISO 14025 & EN 15804. Developed in accordance with the European standard EN 15804+A2. Health Product Declaration (HPD): Declaring textile content and substance |

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid.




Blazer

Made from premium New Zealand lambswool, providing the highest quality raw material that is ideal for spinning, weaving and dyeing.

CLASS C

CAMIRA - BLAZER




FAIRFIELD
CUZ47




SILVERDALE
CUZ28



STONEBRIDGE
CUZ4W



PLYMOUTH
CUZ1R



NORLAND
CUZ4J



PERTH
CUZ4H



BROKENHURST
CUZ4B



VASSAR
CUZ2U



ASTON
CUZ02




MANCHESTER
CUZ1V



ELLESMORE
CUZ3Z




KNIGHTSBRIDGE
CUZ26




DUNDEE
CUZ4P



TETTENHALL
CUZ3X



EDINBURGH
CUZ1Y



OXFORD
CUZ09



ULLSWATER
CUZ4S



WOODCROFT
CUZ2Z



MORAY
CUZ4K



LATYMER
CUZ33


CAMIRA - BLAZER



DARTMOUTH
CUZ2Q




DUNHURST
CUZ58



ULSTER
CUZ1F



CAMPHILL
CUZ1K




KINGHAM
CUZ3U



STOWE
CUZ3R



BRYANSTON
CUZ53



NEWPORT
CUZ1L




HEATHFIELD
CUZ4V



OAKHAM
CUZ3Y



MONTCREST
CUZ3A



ABERTAY
CUZ3B




AMBLESIDE
CUZ4G




BODMIN
CUZ4F



CARDIFF
CUZ1N



GRANTHAM
CUZ4E



PADWORTH
CUZ3N



ST ANDREWS
CUZ86



TREVELYAN
CUZ31



SURREY
CUZ1E

CAMIRA - BLAZER



FALMOUTH
CUZ4M




MOORLANDS
CUZ4T




CHICHESTER
CUZ4C



HOLYOKE
CUZ2T



BRISTOL
CUZ4X



CATERHAM
CUZ4A




WESLEY
CUZ82



DUNALK
CUZ4D



DERBY
CUZ4Q



EARLSCLIFFE
CUZ3T




ACKWORTH
CUZ3P




WARWICK
CUZ4L



MALVERN
CUZ3L



EYNESBURY
CUZ2W



LEEDS
CUZ4R



FELSTED
CUZ3S



UPLANDS
CUZ4U



LEICESTER
CUZ4N





TONBRIDGE
CUZ3Q



GOLDSMITH
CUZ39

CAMIRA - BLAZER

ORIEL
CUZ18WELLINGTON
CUZ13HANDCROSS
CUZ63MAGDALENE
CUZ21EDGE HILL
CUZ90MORETON
CUZ3WSIDCOT
CUZ3VABERLOUR
CUZ1JNEWCASTLE
CUZ1WHULL
CUZ1PWINCHESTER
CUZ12SILCOATES
CUZ30BROMSGROVE
CUZ35GLENALMOND
CUZ62LUCTON
CUZ3MKINGSMEAD
CUZ67NAPIER
CUZ08

CAMIRA - BLAZER

PRODUCT SPECIFICATIONS

| | |
|---------------------|--|
| Application | Task Seating / Soft Seating / Curtains |
| Composition | 100% Virgin Wool. Non metallic dyestuffs |
| Environmental | Certified to Indoor Advantage™ "Gold" Rapidly renewable and compostable |
| Width | 140 cm minimum |
| Weight | 460 g/m ² ±5% |
| Abrasion Resistance | Heavy duty / 10 year guarantee. Independently certified to ≥50,000 Martindale cycles |
| Flammability | EN 1021 - 1&2 [cigarette & match], BS 7176 Low Hazard, NF D 60-013, ÖNORM B 3825 & A 3800-1 [58kg/m ³ CMHR Foam], UNI 9175 Classe 1 IM, BS 476 Part 7 Class 1 (Adhered) EN 13501-1 Adhered Class D, s1, d0, BS 5852 Ignition Source 5 when FR treated BS 7176 Medium Hazard when FR treated, BS 476 Part 6 Class 0 when FR treated (Adhered) EN 13501-1 Adhered Class B, s1, d0 when FR treated, EN 13501-1 Un-adhered Class D, s2, d0 when FR treated, BS 5867-2 Type B Curtains & Drapes when FR treated, The Furniture and Furnishing (Fire) (Safety), Regulations 1988 (Domestic Cigarette and Match), IMO FTP Code (Part 8) |
| Light Fastness | 5 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Guarantee | 10 Years |

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use steam or professionally dry clean.

Relate

A dense directional weave that unites two different unicoloured yarns which seemingly melt together.

CLASS C

KVADRAT - RELATE



991



821




981



961



941



921



441




271




461



221




431




401




161



151



111



121



101



201



741



711

KVADRAT - RELATE



341

KVADRAT - RELATE

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|---|
| Application | Offices, hotels, institutions, domestic use. Great durability. In accordance with California AB2998 or similar regulation in other states of North America, this product should not be used for residential upholstery in USA. |
| Composition | 100% Trevira CS |
| Width | App. 55 inches (140 cm). |
| Weight | App. 14.4 oz/ly (450 g/lin.m). |
| Abrasion | App. 80,000 rubs acc. to the Martindale method. EN ISO 12947. |
| Flammability | FAR 25.853 • AS/NZS 3837 class 2 • CAN ULC S109 • BS 5852 part 1 with treatment • IMO FTP Code 2010 Part 5 • GB 8624 B1 • ASTM E84 Class A Unadhered • AS/NZS 1530.3 • UNI 9175 1IM • UNI 9177 Classe 1 • BS 5867 part 2 type B • ASTM E84 Class B Adhered • IMO FTP Code 2010 Part 8 • ÖNORM B1/Q1 • NF P 92 507 M1 • BS 7176 Low Hazard • EN 1021-1/2 • CAN ULC S102 • SN 198 898 5.2 • EN 13501-1, B-s1, d0 • DIN 4102 B1 • US Cal. Bull. 117-2013 • NFPA 701 • BS 5852 Crib 5 • NF D 60 013 |
| Light Fastness | [ISO] 5-7. Pilling [EN ISO] 4-5. Fastness to rubbing [ISO] dry 4-5, wet 4-5. |
| Fastness to Rubbing | Dry note 4-5 ISO 105-X12, Wet note 4-5 ISO 105-X12 |
| Sound Absorption | [EN ISO 354] 0.50/Class D [flat], 0.70/Class C [waved]. |
| Airflow | 2241 Pa s/m. EN 29053 |
| Pilling | Note 4-5, EN ISO 12945 |
| Guarantee | 10 Years |
| Physical properties | Pilling Class 4-5 Breaking Strength warp 276 / weft 295 lbs. Seam Slippage warp 83 / weft 89 lbs. |
| Environmental benefits | EU Ecolabel compliant No use of halogen-based flame retardants (incl. brominated and chlorinated) Free of intentionally added PFAS Mono-material designed for circularity REACH compliant Californian Proposition 65 list compliant LBC Red list compliant |
| Green building certificates | Greenguard Gold: Low chemical emission Environmental Product Declaration (EPD): 3rd Party Verified. ISO 14025 & EN 15804. Developed in accordance with the European standard EN 15804+A2. Health Product Declaration (HPD): Declaring textile content and substance |

Care

Please see the ISO symbols. Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid. Also washable at 60-80°C, half wash load. Drip drying. Mount in moist condition. Shrinkage app. 2% at 60°C. Be aware of increased shrinking and creasing the higher the temperature.



Techni-colour

Tactile melange upholstery woven from locally sourced wool, defined by a specially developed colour system and enhanced softness, creating subtle surface movement.

CLASS C

KVADRAT - TECHNICOLOUR




220




230




250



110




120



140



150



160



200



210



260




340




520



550



620




650



360



370




190




690

KVADRAT - TECHNICOLOUR

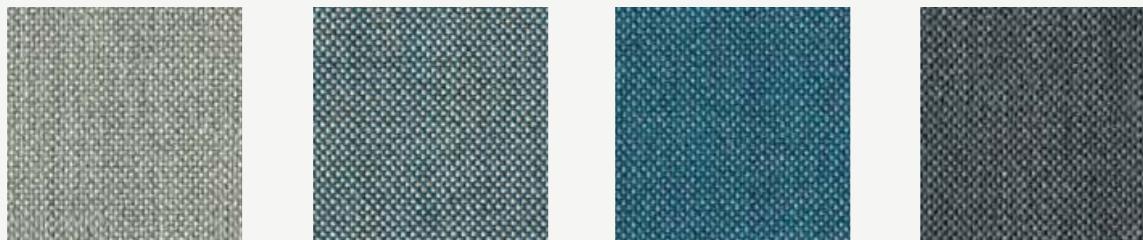

810 820 830 860

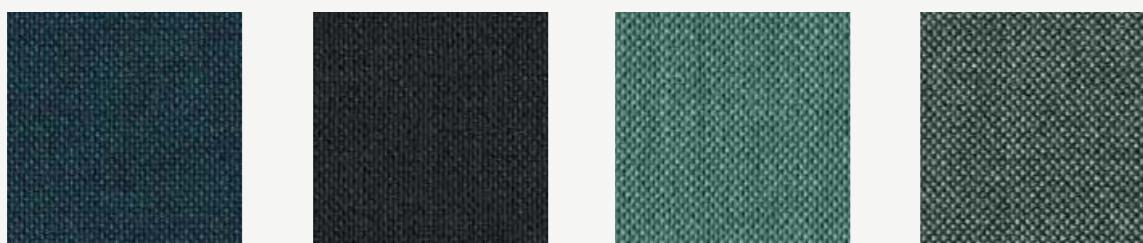

870 890 930 940



990

970

KVADRAT - TECHNICOLOUR

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|---|
| Application | Offices, hotels, institutions, domestic use. Great durability. |
| Composition | 100% British wool, worsted |
| Width | App. 140 cm, 55 inches |
| Weight | App. 430 g/lin.m, 14 oz/ly |
| Abrasion | App. 80.000 Martindale rubs, EN ISO 12947 |
| Flammability | AS/NZS 3837 class 2 • BS 5867 part 2 type B with treatment • SN 198 898 5.3 with treatment • ASTM E84 Class A Unadhered • BS 5852 crib 5 with treatment • AS/NZS 1530.3 • UNI 9175 1IM • IMO FTP Code 2010 Part 8 • BS 5852 part 1 • BS 7176 Low Hazard • EN 1021-1/2 • ASTM E84 Class A Adhered • US Cal. Bull. 117-2013 • NF D 60 013 |
| Light Fastness | Note 6-7 ISO 105-B02 |
| Fastness to Rubbing | Dry note 4-5 ISO 105-X12, Wet note 3-5 ISO 105-X12 |
| Seam slippage | Seam parallel to warp: 10.0 mm parallel to weft: 8.1 mm, EN ISO 13 936-2 180 Newton |
| Airflow | 301 Pa s/m EN 29053 |
| Pilling | Note 4, EN ISO 12945 |
| Guarantee | 10 Years |
| Physical properties | Pilling Class 4 Breaking Strength warp 133 / weft 131 lbs. Seam Slippage warp 26 / weft 24 lbs. |
| Environmental benefits | EU Ecolabel compliant Free of intentionally added PFAS Mono-material designed for circularity REACH compliant Californian Proposition 65 list compliant LBC Red list compliant Healthier Hospitals compliant |
| Green building certificates | Greenguard Gold: Low chemical emission Health Product Declaration (HPD): Declaring textile content and substance |

Care

Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid. Disinfection, see kvadrat.dk




Main Line Flax

A new inherently flame retardant fabric from sustainable sources with strong, long and smooth fibres.

CLASS C

CAMIRA - MAIN LINE FLAX



ALPERTON
MLF43



LAMBETH
MLF08



LEYTON
MLF13



BALHAM
MLF44



BARKING
MLF45



ALDGATE
MLF01



KILBURN
MLF06



PARSONS
MLF14



BLACKWALL
MLF46



NORTHFIELDS
MLF40




BARBICAN
MLF03




BRIXTON
MLF47



CHIGWELL
MLF48



EMBANKMENT
MLF50



TOWER
MLF36



WATERLOO
MLF21




EPPING
MLF51



CLAPHAM
MLF49



BROMPTON
MLF35

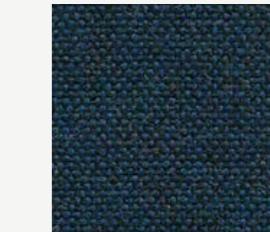

VICTORIA
MLF19

CAMIRA - MAIN LINE FLAX




WESTMINSTER
MLF22



BAYSATER
MLF24



STANMORE
MLF37



PIMLICO
MLF34



HOLBORN
MLF05



NEWBURY
MLF10



MONUMENT
MLF09



GREENWICH
MLF52



BETHNAL
MLF25



HARROW
MLF54



HORNCHURCH
MLF55



HAMPSTEAD
MLF53



GREENFORD
MLF32



TUFNELL
MLF18



FARRINGDON
MLF29




KENTISH
MLF56



MOORGATE
MLF57



WOODFORD
MLF67



GOLDHAWK
MLF31



TOOTING
MLF17


CAMIRA - MAIN LINE FLAX



PERIVALE
MLF59



STOCKWELL
MLF15




KENSINGTON
MLF07



MORDEN
MLF12



PINNER
MLF60



BANK
MLF23



ARCHWAY
MLF02



REDBRIDGE
MLF61



CAMDEN
MLF26



RICHMOND
MLF62




TEMPLE
MLF16



SHADWELL
MLF63



STRATFORD
MLF64



WATFORD
MLF65



WHITECHAPEL
MLF66



EDFWARE
MLF28

CAMIRA - MAIN LINE FLAX



UPMINSTER
MLF20



Colors may slightly vary due to photographic lighting sources or your monitor settings.

CAMIRA - MAIN LINE FLAX

PRODUCT SPECIFICATIONS

| | |
|---------------------|---|
| Application | Task Seating / Soft Seating / Curtains |
| Composition | 75% Virgin Wool, 25% Flax |
| Environmental | Certified to the EU Ecolabel Certified to Indoor Advantage™ "Gold" Rapidly renewable and compostable. Made from wool and bast fibre. |
| Width | 140 cm minimum |
| Weight | 437 g/m ² ±5% |
| Abrasion Resistance | Heavy duty / 10 year guarantee. Independently certified to ≥50,000 Martindale cycles |
| Flammability | EN 1021 - 1&2 (cigarette & match), BS 7176 Low Hazard, BS 5852 Ignition Source 5 BS 7176 Medium Hazard, NF D 60-013, ÖNORM B 3825 & A 3800-1 (58kg/m ³ CMHR Foam) UNI 9175 Classe 1 IM, BS 5867-2: Type B Curtains & Drapes, IMO FTP Code (Part 8) The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match) |
| Light Fastness | 5 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 3, Dry: 4 (ISO 105 - X12) |
| Guarantee | 10 Years |

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use steam or professionally dry clean.

FOX

A selection that takes its elegance from calm and simple colours and makes a difference with its texture.

CLASS C

FIDIVI - FOX



9622



9107



9113




9202



9108



9114




9302



9203



9322




9407



9312



9412




9402



9217




9706



9702



9705



9212



9106



9616

FABRIC & LEATHER

FIDIVI - FOX



Colors may slightly vary due to photographic lighting sources or your monitor settings.

FIDIVI - FOX

PRODUCT SPECIFICATIONS

| | | |
|-----------------------|---|--|
| Description | Yarn dyed 2 color melange fabric. Wool handtouch, fishbone design, in 22 colorways | |
| Application | Office, Contract | |
| Weight | 525 ± 5 % g/ml 350 ± 5 % g/m ² | |
| Height | 150 ± 2 % cm | |
| Composition | 100% Polyester Trade Mark Trevira CS | |
| Abrasion Resistance | ISO 12947/2 120.000 ± 10 % Rubs | |
| Light Fastness | ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8 | |
| Fastness to Rubbing | ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5 | |
| Pilling (2000 rubs) | ISO 12945-2 5 Tolerance: from 4 to 5 | |
| Acoustic Performances | ISO 9053 (Air flow) | |
| Fire Resistance | UNI 9174 Class 1 can meet UNI 9175 Class 1 IM can meet DIN 4102 Class B1 NF P 92 501-7 Class M1 NF D 60013 Class AM18 can meet EN 1021-1 & 2 BS 5852 Crib 5 BS 7176 Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 can meet California TB 117:2013 can meet USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery | Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Certifications | Oekotex Euflower - Ecolabel | |
| Warranty | 5 Years | |
| Cleaning and Washing |     | |



Laser J

The intense
fabric experience
comes with its
attentive design.

CLASS C


FIDIVI - LASER J



0001



1049




1014




1003



8006



2048



2036




3009



3004



3081




3094



3082



3012



4017



4079



4073



4024



4021



4011



6083

FABRIC & LEATHER

FIDIVI - LASER J



6075

FIDIVI - LASER J

PRODUCT SPECIFICATIONS

| | | |
|---------------------------|--|--|
| Description | Fabric in 34 united colors | |
| Application | Office, Contract | |
| Weight | $735 \pm 5\% \text{ g/ml}$ $525 \pm 5\% \text{ g/m}^2$ | |
| Height | $140 \pm 2\% \text{ cm}$ | |
| Composition | 100% Polyester Trevira CS | |
| Abrasion Resistance | ISO 12947/2 $150.000 \pm 10\% \text{ Rubs}$ | |
| Light Fastness | ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8 | |
| Fastness to Rubbing | ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5 | |
| Pilling (2000 rubs) | ISO 12945-2 5 Tolerance: from 4 to 5 | |
| Acoustic Performances | ISO 9053 (Air flow) ISO 354 (Reverberation Room), 0,8 | |
| Fire Resistance | UNI 9174 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF P 92 501-7 M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS 5852 Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 can meet California TB 117:2013 USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery | Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Stain Repellent Treatment | Trademark Trevira B1 certificate MOQ 250m | |
| Certifications | Oekotex Euflower - Ecolabel | |
| Warranty | 5 Years | |
| Cleaning and Washing |     | |



Silvertex

A serene and dynamic touch meets with high quality artificial leather thanks to its broad spectrum.

CLASS C


SPRADLING - SILVERTEX




CAMEL
122-2105



SKYLIGHT
122-2103



CORAL
122-2102



ALUMINIUM
122-2101



TEAL
122-2100



LOTUS
122-2099



ROSÉ
122-2098




ORCHID
122-2097



TOMATO
122-2096



GRENADINE
122-2095



PETROL
122-2094



SQUASH
122-2093



AVOCADO
122-2092



ICE CREAM
122-2090



WHITE
122-2089



TURQUOISE
122-3001



BALTIC
122-3066



DELFT
122-3067




JET
122-3068




SAPPHIRE
122-3007

FABRIC & LEATHER

SPRADLING - SILVERTEX



FOREST
122-5063



BOTTLE
122-5010



BASIL
122-5020



PISTACHO
122-5008



CELERY
122-5019



SAGE
122-5009



AUBERGINE
122-7001



RASPBERRY
122-2016



RUBIN
122-6004



WINE
122-2064



UMBER
122-1014



RED
122-2011




SUNKIST
122-2012



MANDARIN
122-6061



SAFRAN
122-6065



MELON
122-6062



ORANGE
122-0013



LUGGAGE
122-0073



ICE
122-4004



CREAM
122-1077

SPRADLING - SILVERTEX



SISAL
122-1051



CHAMPAGNE
122-1078



BEIGE
122-1010



MACADAMIA
122-0001



SANDSTONE
122-0002



TAUPE
122-0009



SHIITAKE
122-4012



METEOR
122-4024



MOCCA
122-0005



PLATA
122-4001




STERLING
122-4011




TITANIUM
122-4010




STORM
122-4002



GRAPHITE
122-4003



CARBON
122-9002




BLACK
122-9001



BRICK
122-9243



DEEPSEA
122-3352




GOJI
122-7251




HUNTER
122-5468

FABRIC & LEATHER


SPRADLING - SILVERTEX




JUNGLE
122-5544



MIZZLE
122-6434




SMOG
122-5039



WHALE
122-3375



WINDY
122-2318

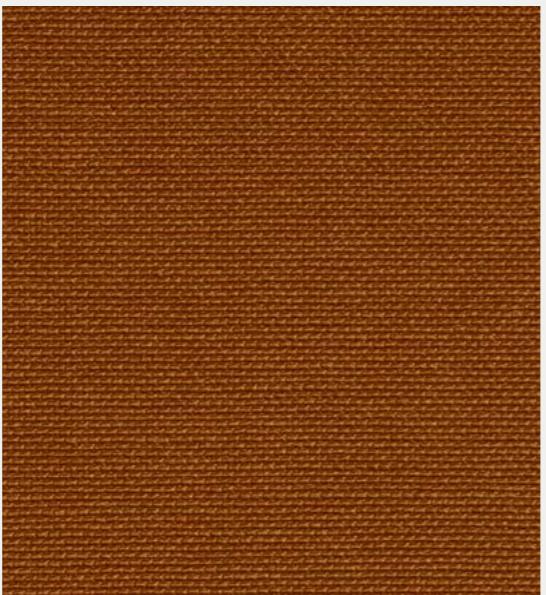

COBRE
122-2003

SPRADLING - SILVERTEX

PRODUCT SPECIFICATIONS

| | |
|--------------------|---|
| Composition: | Topcoat :Vinyl Backing; 100% Polyester Hi-Loft2™ |
| Weight: | 685 gr/m2 |
| Width: | min. 137 cm |
| Roll size: | +/- 30m |
| Abrasion: | >300.000 cycles (MARTINDALE) |
| Flame retardancy*: | EN 1021 Part 1 & 2 DIN 4102 B2 MED ECE R 118.02 Anx. 6,7 & 8 IMO 2010 FTP Part 8 UNI 9175 Classe I.II UNE 23.727-90 IR/M.2 NF P 92-503 / M2 EN 71-2:2006+ A1:2007 FMVSS 302 |
| Cold Crack: | -20°C |
| UV-Resistance: | ISO 105 B02: ≥ 7/8 (BlueWool Scale) ISO 104 B04: ≥ 4/5 (Grey Scale) |

FINISHES AND TREATMENTS PERMABLOK3®

| | |
|----------------------------|--|
| Virucidal Activity | ISO 18184:2019: Coated Fabrics treated with PERMABLOK3® are proven to reduce the presence of Coronavirus** by more than 90% within one hour of contact. ISO 21702:2019: All the Coated fabrics treated with PERMABLOK3® are capable of reducing the Coronavirus** activity by 99,9% within 24 hours of exposure on the surface. |
| Bacteriostatic Properties: | ISO 22196:2011. Value of antibacterial*** activity R>2. ** Testing was conducted with material exposed to Feline Coronavirus (same coronaviridae family, structures and mechanisms similar to SARS-CoV2) |
| WARRANTY | ISO 22196:2011. Value of antibacterial*** activity R>2. ** Testing was conducted with material exposed to Staphylococcus aureus, Staphylococcus aureus (MRSA), Escherichia coli and Klebsiella pneumoniae. • The vinyl should be cleaned periodically in order to maintain its appearance and prevent build-up of dirt and contaminants. • Any stain, spills, or soiling should be cleaned up promptly to prevent the possibility of permanent staining. |
| CARE AND CLEANING | • Vinyl fabrics treated with PERMABLOK3® require a minimum of maintenance to retain their good looks. Use soft soapy solutions or special cleaning products for vinyl fabrics to remove stains on the surface of the material. Remove only with a damp white cloth. • Lacquers, strong cleaners, detergents, xylene-based solutions, acetone, or MEK cause immediate damage and contribute to the deterioration of the material. The use of such cleaners is at the owner's risk. |

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. SPRADLING International GmbH, SPRADLING UK Ltd, and EURO SPRADLING S.L.U will not assume responsibility for dye transfer caused by external contaminants and possible permanent staining caused by this phenomenon.


PERMABLOK3® and SILVERTEX® are registered trademarks of Sprading Holdings, Inc.® | Hi-Loft2™ is trademark of Spradling Holdings, Inc.®

Milano

Combining the feeling
of ease and peace
with its carefully
selected colours.

CLASS B


FIDIVI - MILANO




9000




9801



9878

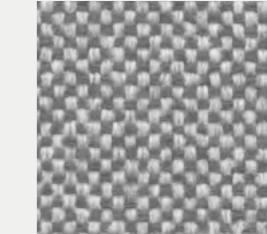

9809



9817



9833



9101



9108




9106



9224



9212

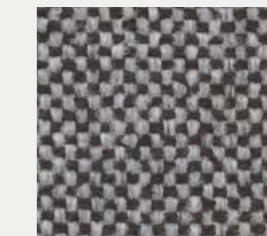

9210



9390




9319



9330



9430



9451



9427



9494



9418

FIDIVI - MILANO



9506

FIDIVI - MILANO

PRODUCT SPECIFICATIONS

| | | |
|---------------------------|--|--|
| Description | Full wool-like appearance and handtouch. 34 yarn dyed combinations | |
| Application | Office, Luggage, Contract | |
| Weight | 525 ± 5 % g/ml 375 ± 5 % g/m ² | |
| Height | 140 ± 2 % cm | |
| Composition | 100% Polyester Trevira CS | |
| Abrasion Resistance | ISO 12947/2 80.000 ± 10 % Rubs | |
| Light Fastness | ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8 | |
| Fastness to Rubbing | ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5 | |
| Pilling (2000 rubs) | ISO 12945-2 5 Tolerance: from 4 to 5 | |
| Acoustic Performances | ISO 354 (Reverberation Room), 0,65 | |
| Fire Resistance | UNI 9174 Class C1 can meet UNI 9175 Class 1 IM can meet DIN 4102 Class B1 NF P 92 501-7 M1 NF D 60013 Class AM18 can meet EN 1021-1 & 2 BS 5852 Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 can meet California TB 117:2013 can meet USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery | Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Stain Repellent Treatment | Trademark Trevira B1 certificate MOQ 250m | |
| Certifications | Oekotex Euflower - Ecolabel | |
| Warranty | 5 Years | |
| Cleaning and Washing | | |



Roccia

The world's
favorite thanks
to its perfect
harmony of
elegance and
diversity.

CLASS B


FIDIVI - ROCCIA



4504



4011



8514



4512



3012




4501



5005



5505



5504




3506



3502



2502



2501



1504




1503




1502




1511



8501




8502




8030

FABRIC & LEATHER

FIDIVI - ROCCIA



8504



5512




8515




5502




6506




6522



6517



6536



6055



6526



6505



6503



6502



6501



7504



7503



7502



7501



7016



7512

FIDIVI - ROCCIA



2517



3503

FABRIC & LEATHER

FIDIVI - ROCCIA

PRODUCT SPECIFICATIONS

| | | |
|-----------------------|---|--|
| Description | Yarn dyed 2 color melange fabric. Wool handtouch in 42 natural colorways. | |
| Application | Office, Contract | |
| Weight | 350 ± 5 % g/ml 250 ± 5 % g/m ² | |
| Height | 140 ± 2 % cm | |
| Composition | 100% Polyester Trade Mark Trevira CS | |
| Abrasion Resistance | ISO 12947/2 70.000 ± 10 % Rubs | |
| Light Fastness | ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8 | |
| Fastness to Rubbing | ISO 105-X12 4/5 (grey scale) Tolerance: from 4 to 5 | |
| Pilling (2000 rubs) | ISO 12945-2 5 Tolerance: from 4 to 5 | |
| Acoustic Performances | ISO 354 (Reverberation Room), 0,6 | |
| Fire Resistance | UNI 9174 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF P 92 501-7 M1 NF D 60013 Class AM18 EN 1021-1 & 2 BS 5852 CRIB 5 BS 7176 Class Medium Hazard EN 13773 Class 1 can meet OENORM 3800-1 Class B1,Q1,TR1 California TB117 USA NFPA 701 can meet USA NFPA 260 can meet IMO Part 8 Upholstery | Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Certifications | Oekotex Euflower - Ecolabel | |
| Warranty | 5 Years | |
| Cleaning and Washing |     | |




Time


The timeless
beauty of
charming colours
and fresh
feelings.

CLASS B

FIDIVI - TIME



8048




8004



8006




8007



7026



7023




7008




7019




7036




7011




3090



3094



3012



3082



4066




4022



4079



4021




6001



6070

FIDIVI - TIME

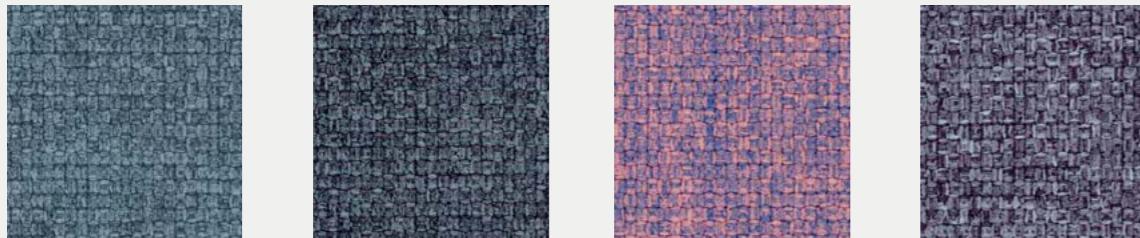

6031

6034

6018


6026



1010

1020

2005

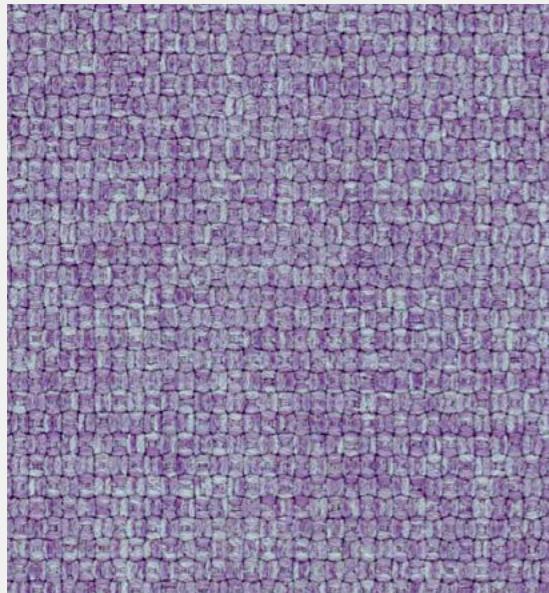

6091

FIDIVI - TIME

PRODUCT SPECIFICATIONS

| | | |
|----------------------|--|--|
| Description | Recycled polyester melange fabric. Piece dyed in 28 colorshades. | |
| Application | Office, Furniture, Contract | |
| Weight | 490 ± 5 % g/ml 350 ± 5 % g/m ² | |
| Height | 140 ± 2% cm | |
| Composition | 100% Polyester - Recycled GRS | |
| Abrasion Resistance | ISO 12947/2 100.000 ± 10% Rubs | |
| Light Fastness | ISO 105-B02 6 (blue scale) Tolerance: from 5 to 8 | |
| Fastness to Rubbing | ISO 105-X12 4/5 (grey scale) Tolerance: from 5 to 8 | |
| Pilling (2000 rubs) | ISO 12945-2 5 Tolerance: from 5 to 8 | |
| Fire Resistance | UNI 9175 Class 1 IM EN 1021-1 & 2 BS 5852 CRIB 5 part 2 BS 7176 Class Medium Hazard California TB 117-2013 | Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Certifications | Oekotex GRS | |
| Warranty | 5 Years | |
| Cleaning and Washing | | |



Global Recycled Standard
GRS Certified by ICEA
(GRS 2020-158)



OEKOTEX®
STANDARD 100
673103-01-000000
www.oeko-tex.com



GUARANTEE
5
YEARS



RECYCLED
FROM BOTTLES




Furniture
from recycled materials

Autumn


Upholstery textile woven from 100% recycled polyester, defined by a layered weave that offers a soft hand and a nuanced melange colour palette inspired by the transient nature of ageing.

CLASS B


KVADRAT - AUTUMN

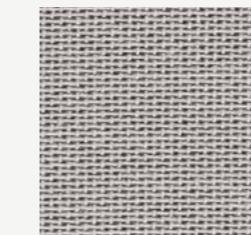

101

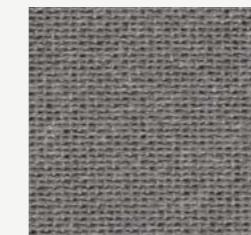

131

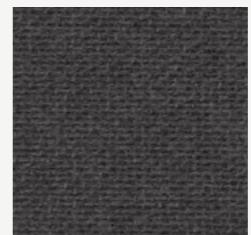

171




191



221




331

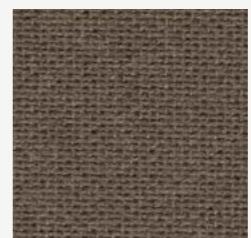

361



971

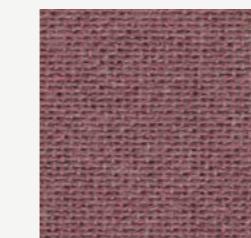

651




681



751




771

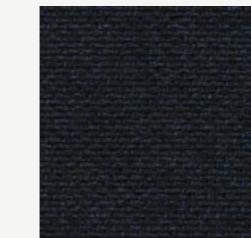

791

KVADRAT - AUTUMN

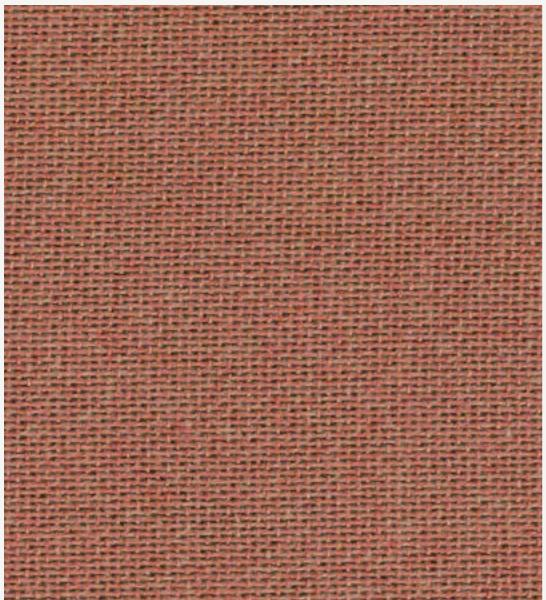

551

KVADRAT - AUTUMN

PRODUCT SPECIFICATIONS

| | |
|-----------------------------|---|
| Application | Offices, hotels, institutions, domestic use. Great durability. |
| Composition | 100% recycled polyester |
| Width | App. 140 cm, 55 inches |
| Weight | App. 590 g/lin.m, 19 oz/ly |
| Abrasion | Min. 50.000 Martindale rubs, EN ISO 12947 |
| Flammability | BS 5852 part 1 with treatment • ASTM E84 Class A Unadhered • BS 5852 crib 5 with treatment • SN 198 898 5.2 with treatment • AS/NZS 3837 class 1 • IMO FTP Code 2010 Part 8 • NFPA 701 with treatment • BS 7176 Low Hazard • Önорм B1/Q2 with treatment • EN 1021-1/2 • ASTM E84 Class A Adhered • US Cal. Bull. 117-2013 |
| Light Fastness | Note 6-7 ISO 105-B02 |
| Fastness to Rubbing | Dry note 4-5 ISO 105-X12, Wet note 4-5 ISO 105-X12 |
| Seam slippage | Seam parallel to warp: 4.0 mm parallel to weft: 4.0 m, EN ISO 13 936-2 180 Newton |
| Airflow | 757 Pa s/m |
| Pilling | Note 4, EN ISO 12945 |
| Guarantee | 10 Years |
| Physical properties | Pilling Class 4 ASTM D4970 Breaking Strength warp 306 / weft 217 lbs. ASTM D5034 Seam Slippage warp 120 / weft 108.5 lbs. ASTM D 4034 |
| Environmental benefits | Complies with EU Ecolabel Free of intentionally added PFAS Mono-material designed for circularity REACH compliant Californian Proposition 65 list compliant LBC Red list compliant Healthier Hospitals compliant |
| Green building certificates | Greenguard Gold: Low chemical emission Health Product Declaration (HPD): Declaring textile content and substance |

Care

Vacuum clean frequently, ideally every week if fixed covers. Remove stains as soon as they occur, with clean warm water or sparkling water. Extraction clean when necessary. Extraction cleaning might dissolve water-based glue. Pay attention to temperature and amount of cleaning fluid. Disinfection, see kvadrat.dk



Fiocco

Featuring a distinctive bouclé texture, it is crafted from 100% Trevira CS polyester, making it an elegant and versatile choice for office and contract applications.

CLASS B

FIDIVI - FIOCO



9101



9121



9111



9801



9831




9201



9211




9221




9208



9313



9203



9303



9403



9402



9204



9404



9214



9414




9811




9821

FABRIC & LEATHER

FIDIVI - FIOCCO



9818



9808



9616




9626



9216




9636



9706



9606




9736




9707




9717



9205



9506

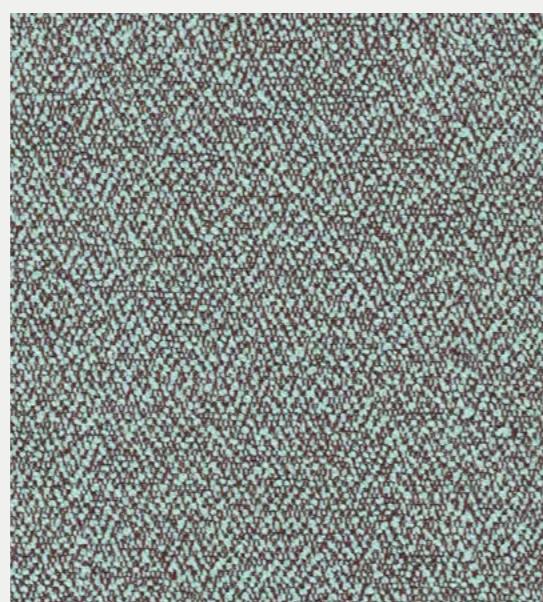

9206

FIDIVI - FIOCCO

PRODUCT SPECIFICATIONS

| | | |
|----------------------|--|--|
| Description | Slight colour differences between one lot and another have to be considered within commercial tolerance | |
| Weight | 620 ± 5 % g/ml 440 ± 5 % g/m ² | |
| Width | 140 ± 2 % cm | |
| Composition | 100% POLYESTER TREVIRA CS | |
| Abrasion Resistance | ISO 12947-2 (Martindale) 120.000 ± 10 % Rubs | |
| Light Fastness | ISO 105-B02 (Xenotest) 6 (blue scale) Tolerance: from 5 to 8 | |
| Fastness to Rubbing | ISO 105-X12 (Crockmeter) 4/5 (grey scale) Tolerance: from 4 to 5 | |
| Pilling (2000 rubs) | ISO 12945-2 5 Tolerance: from 4 to 5 | |
| Fire Resistance | UNI 9174 - 8456 Class C1 UNI 9175 Class 1 IM DIN 4102 Class B1 NF 92501-7 Class M NF D 60013 Class AM18 EN 1021-1 & 2 BS Crib 5 BS 7176 Class Medium Hazard EN 13773 Class 1 OENORM 3800-1 Class B1,Q1,TR1 California TB117 USA NFPA 701 USA NFPA 260 IMO Part 8 Upholstery | Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. |
| Certifications | Oekotex Euflower - Ecolabel | |
| Warranty | 5 Years | |
| Cleaning and Washing | | |



Vita

ARTIFICIAL LEATHER


High-quality artificial leather with a subtle surface grain effect and full matt appearance.

CLASS B


CAMIRA - VITA



CORNSILK
ITA37




DAISY
ITA43



YELLOW
ITA03




LEMON
ITA33



CARROT
ITA41



PUNCH
ITA35



SQUASH
ITA05




AMPLIFIED
ITA52



TOMATO
ITA08



RUST
ITA11



HOLLYHOCK
ITA51



FLAMINGO
ITA34



PINK
ITA20



SIN
ITA50



PLUM
ITA23



WISTERIA
ITA49



AMETHYST
ITA17



ENVY
ITA55



ROCKER
ITA53



CLASH
ITA56

CAMIRA - VITA



BUBBLES
ITA36




PORCELAIN
ITA15



SAIL
ITA54



MARINA
ITA21



NAVY
ITA22



SURF
ITA48



BREEZE
ITA32



WATERFALL
ITA18




SAPPHIRE
ITA16




PEACOCK
ITA19



SPRING
ITA40

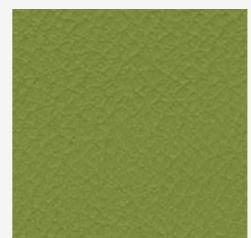

AVOCADO
ITA06




OLIVE
ITA09




YUCCA
ITA30




SEAL
ITA01

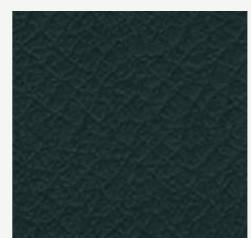

SEAWEED
ITA31



BONE
ITA38



SWAN
ITA42



PIGEON
ITA45



KOALA
ITA04

CAMIRA - VITA




HIPPO
ITA07



CHIFFON
ITA44



OATMEAL
ITA02



ALPACA
ITA46



GOLDEN
ITA39




TAUPE
ITA10




ESPRESSO
ITA14




AMERICANO
ITA13



BEETLE
ITA47



NOIR
ITA12

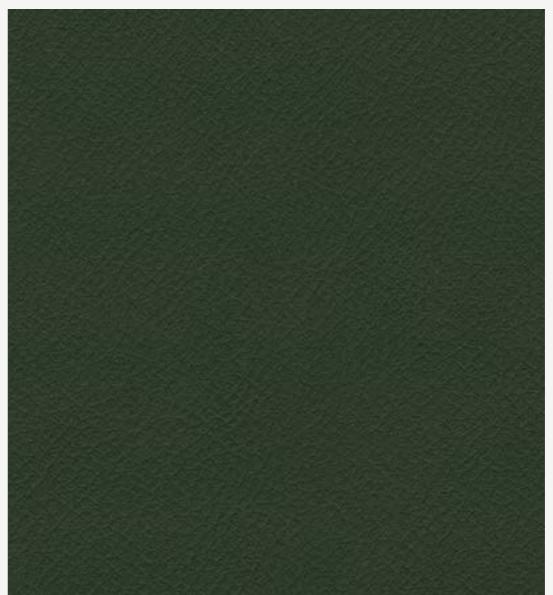

WREATH
ITA29

CAMIRA - VITA



Colors may slightly vary due to photographic lighting sources or your monitor settings.

CAMIRA - VITA

PRODUCT SPECIFICATIONS

| | |
|---------------------|---|
| Application | Task Seating / Soft Seating |
| Composition | Surface: 98% PVC, 2% PU Substrate: 100% Cotton |
| Width | 140 cm minimum |
| Weight | 850 g/m ² ±5% |
| Abrasion Resistance | Heavy duty / 5 year guarantee ISO 5470-2 100,000 rubs (Grade 2 minimum) |
| Flammability | EN 1021 - 1&2 (cigarette & match), BS 7176 Low Hazard, BS 5852 Ignition Source 5 BS 7176 Medium Hazard, BS 5852 Ignition Source 7 (with interliner), UNI 9175 Classe 1 IM The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match) IMO FTP Code (Part 8) |
| Flexes | ISO 7854 Method B 400,000 Flexing cycles / 5 year guarantee (full details available) |
| Light Fastness | 6 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Bleach cleanable | ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution. |
| Waterproof | Hydrostatic head BS 3424 Part 26 > 1 metre |
| Urea resistance | BS 3424 Part 19 no significant deterioration after 24 hrs |
| Anti-microbial | AATCC 147 |
| Guarantee | 5 Years |

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use bleach or alcohol.

Aspect

A subtle mélange, textured fabric with a warm soft handle, balancing superior flammability performance and a natural aesthetic.

CLASS B

CAMIRA - ASPECT



SAHARA
ACT13



YOSEMITE
ACT14



ATACAMA
ACT01



AMALFI
ACT02



METEORA
ACT08



GORKHA
ACT12



ZION
ACT09



MARRAKECH
ACT03



PETRA
ACT07



HALONG
ACT05



CAPPADOCIA
ACT04



CALABRIA
ACT06



MATTERHORN
ACT19



MOLOKAI
ACT26




EVEREST
ACT27



RAINER
ACT24



COMO
ACT22



LUCERNE
ACT23



PENYGHENT
ACT20



JASPER
ACT21

CAMIRA - ASPECT

CAPONES
ACT10SERENGETI
ACT16PATAGONIA
ACT18CATBELLS
ACT17PALENQUE
ACT11BAMBURGH
ACT15DOLOMITES
ACT28MALHAM
ACT29GALAPAGOS
ACT30AURORA
ACT31OTAGO
ACT25

PRODUCT SPECIFICATIONS

| | |
|---------------------|---|
| Application | Task Seating / Soft Seating |
| Composition | 75% Trevira® CS Flame Retardant Polyester, 25% Polyester. Non metallic dyestuffs. |
| Environmental | Certified to OEKO-TEX® Standard 100 Certified to Indoor Advantage™ "Gold" |
| Width | 140 cm minimum |
| Weight | 320 g/m ² ±5% |
| Abrasion Resistance | Heavy duty / 10 year guarantee. Independently certified to ≥50,000 Martindale cycles |
| Flammability | EN 1021 - 1&2 [cigarette & match], BS 7176 Low Hazard, BS 5852 Ignition source 5 (over CMHR 50kg/m ³ foam), BS 7176 Medium Hazard (over CMHR 50kg/m ³ foam), DIN 4102 B1, NF D 60-013 (Over 50kg/m ³ CMHR foam), ÖNORM B 3825 & A 3800-1 (over CMHR 58kg/m ³ foam), UNI 9175 Classe 1 IM |
| Light Fastness | 5 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Bleach cleanable | ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution. |
| Guarantee | 10 Years |

Cleaning


Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C.

Quest


Woven entirely from post-consumer recycled plastic, this lightly textured, multi-application textile brings a touch of the ocean's natural beauty to commercial interiors.

CLASS B

CAMIRA - QUEST



DEPTH
QUE01



FOSSIL
QUE02




BARNACLE
QUE03



MUSSEL
QUE04



QUARTZ
QUE05



SHELL
QUE06



WHELK
QUE08




LIMPET
QUE09



ROCK POOL
QUE10



WAVE
QUE11



TIDE
QUE12



SEA GRASS
QUE13




ALGAE
QUE14



KELP
QUE15



SEA FOAM
QUE16



URCHIN
QUE17



ABALONE
QUE18



DRIFTWOOD
QUE19



SANDSTONE
QUE20



BEACH COMBER
QUE21


FABRIC & LEATHER

CAMIRA - QUEST




SALT
QUE22

COCKLE
QUE23

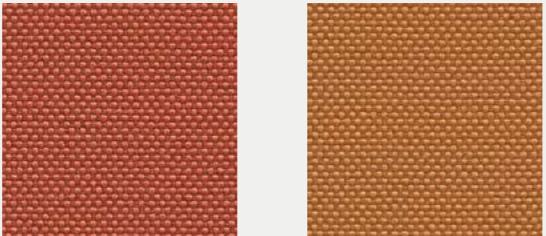


CRAB
QUE24

CLAY
QUE25

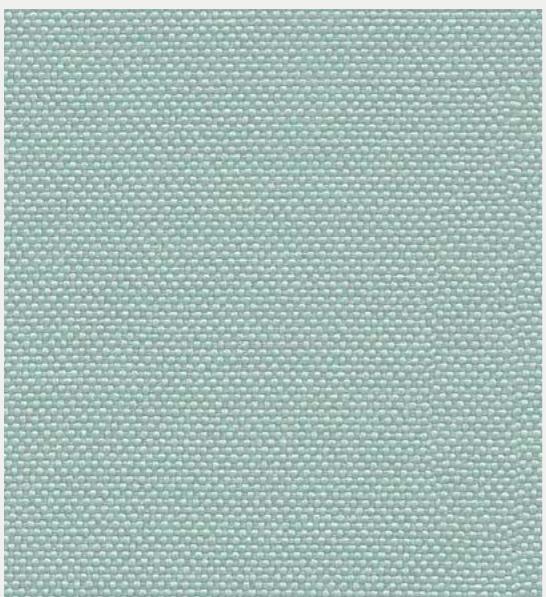

RIPPLE
QUE07

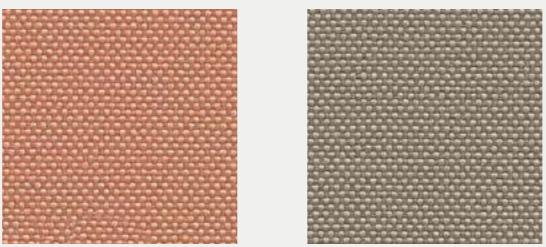


SHRIMP
QUE26

PEBBLE
QUE27

CAMIRA - QUEST

PRODUCT SPECIFICATIONS

| | |
|---------------------|---|
| Application | Task Seating / Soft Seating / Panel |
| Composition | 100% post-consumer recycled polyester including 75% SEAQUAL® YARN |
| Environmental | Certified to the EU Ecolabel Certified to OEKO-TEX® Standard 100 Certified to Indoor Advantage™ Gold Made from 100% post-consumer recycled polyester Non metallic dyestuffs |
| Width | 137 cm minimum |
| Weight | 330 g/m ² ±5% (452g/lin.m ±5%) |
| Abrasion Resistance | Heavy duty / 10 year guarantee. Independently certified to ≥100,000 Martindale cycles |
| Flammability | EN 1021 - 1 (cigarette) EN 1021 - 2 (match) BS 7176 Low Hazard UNI 9175 Classe 1 IM BS 476 Part 7 Class 1Y (Adhered) EN 13501-1 Adhered Class B, s1, d0 EN 13501-1 Un-adhered Class B, s1, d0 Optional: Please specify when ordering BS 5852 Ignition Source 5 with EnviroFlam5 BS 7176 Medium Hazard with EnviroFlam5 IMO FTP Code (Part 8) with EnviroFlam5 Note: Flammability performance is dependent on components used. Our certificates show what substrates have been used in our tests. For composite tests customers must ensure their complete furniture meets the necessary standards. |
| Light Fastness | 4-6 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Bleach Cleanable | ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution |
| Acoustic | Acoustically transparent. Acoustic graphs available upon request |
| Cleaning | Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/ soap. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C. |
| Guarantee | 10 Years |

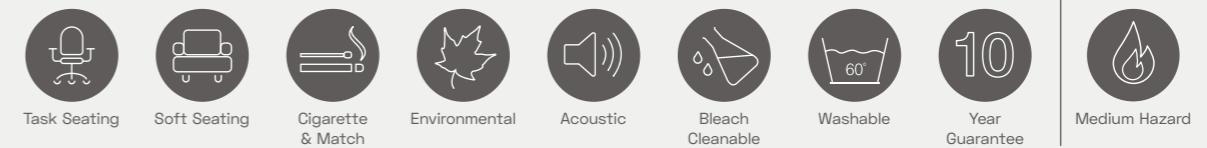

INDOOR AIR QUALITY
GOLD FURNITURE



EU Ecolabel
www.ecolabel.eu



STANDARD
100
11-62664
Shirley
www.oeko-tex.com

RePlay

Inspired by sportswear, it blends a futuristic knitted look with two-tone micro details, offering flexibility, performance, and sustainable design made from 100% post-consumer recycled polyester.

CLASS B


CAMIRA - REPLAY




FLEX
REPO1



AGILE
REPO2




ATHLETIC
REPO3

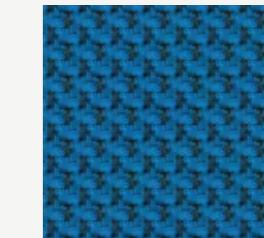


RUN
REPO4



JOG
REPO5




FLIP
REPO6




JOY
REPO7




CHEER
REPO8



HANDSTAND
REPO9



STEP
REPO10



FREESTYLE
REPO11



MOTION
REPO12




SKIP
REPO13



HOP
REPO14




PULL
REPO15

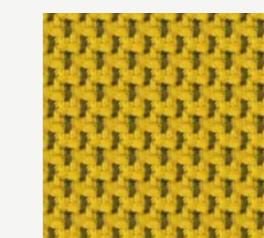


PUSH
REPO16




LIFT
REPO17



ROLL
REPO18



FUN
REPO19

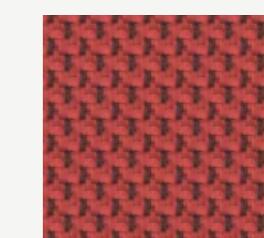

PLAY
REPO20

CAMIRA - REPLAY




CAMIRA - REPLAY

PRODUCT SPECIFICATIONS

| | |
|---------------------|---|
| Composition | 100% Post-Consumer Recycled Flame Retardant Polyester |
| Width | 140 cm minimum |
| Weight | 380 g/m ² ±5% (532 g/lin.m ±5%) |
| Abrasion Resistance | Heavy duty / 10 year guarantee Independently certified to ≥100,000 Martindale cycles |
| Flammability | EN 1021 - 1 (cigarette), EN 1021 - 2 (match), BS 7176 Low Hazard, BS 5852 Ignition Source 5, BS 7176 Medium Hazard, DIN 4102 B1, NF D 60-013, ÖNORM B 3825 & A 3800-1, (over CMHR 58kg/m ³ Foam), UNI 9175 Classe 1 IM, EN 13501-1 Adhered Class B, s1, d0, EN 13501-1 Un-adhered Class B, s1, d0, NF P 92-507 M1. |
| Light Fastness | 4-6 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Bleach Cleanable | ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution. |
| Acoustic Properties | Acoustically transparent. Acoustic graphs available upon request |
| Guarantee | 10 Years |

Cleaning

Vacuum regularly. Wipe with a damp cloth using a proprietary upholstery shampoo/ soap. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C. Full details can be found in our cleaning and disinfection guide.




Valencia

ARTIFICIAL LEATHER


An unique and attractive aesthetic with the combination of high-quality artificial leather and vibrant colors.

CLASS B


SPRADLING - VALENCIA



LOTUS
107-2113



TEAL
107-2119




PETROL
107-5065




WARM GREY
107-4044



ULTRA VIOLET
107-2118



CASHMERE
107-2117



PURE WHITE
107-9607



CAMEL
107-2116



CHESTNUT
107-2115




ROSE
107-2114



TOMATO
107-2112



SQUASH
107-2111



NIGHT
107-2108




SKYLIGHT
107-2107



CORAL
107-2106




SONNE
107-2020




SAFRAN
107-6012



MELONE
107-6013



ORANGE
107-6019



NECTARINE
107-6003

FABRIC & LEATHER

SPRADLING - VALENCIA



SPRADLING - VALENCIA



FABRIC & LEATHER

SPRADLING - VALENCIA



IVORY
107-1020



PEARLESSENCE
107-8020



AZURE
107-0370



CACTUS
107-8438



CLOUD
107-5032



EUCALYPTUS
107-6438



EVEREST
107-2008



FUNGI
107-2522



MISTY
107-8415




PEACH
107-9245



PINE
107-5451



SCUBA
107-0337

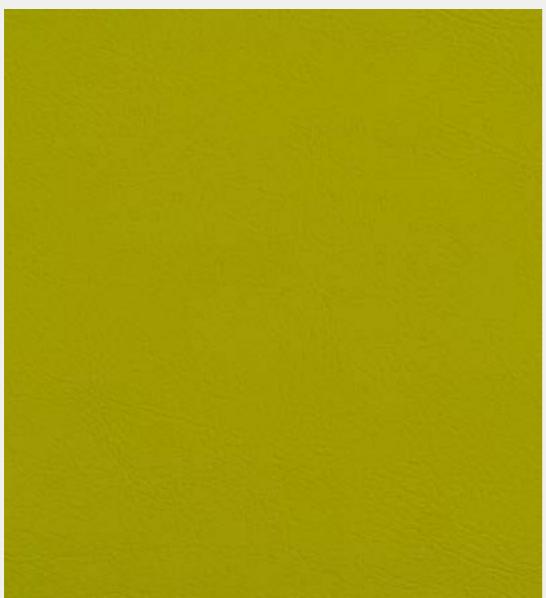

AVOCADO
107-2110

SPRADLING - VALENCIA

PRODUCT SPECIFICATIONS

| | |
|--------------------|--|
| Composition: | Topcoat :Vinyl Backing; 100% Polyester Hi-Loft2™ |
| Weight: | 650 gr/m2 |
| Width: | min. 137 cm |
| Roll size: | +/- 30m |
| Abrasion: | >300.000 cycles (MARTINDALE) |
| | EN 1021 Part 1 & 2 DIN 4102 B2 MED ECE R 118.02 Anx. 6,7 & 8 |
| Flame retardancy*: | IMO 2010 FTP Part 8 UNI 9175 Classe I.I.M UNE 23.727-90 IR/M.2 |
| | NF P 92-503 / M2 EN 71-2:2006+ A1:2007 FMVSS 302 |
| Cold Crack: | -23°C |
| UV-Resistance: | 1000 hours: ≥ 6 Blue wool scale |

FINISHES AND TREATMENTS PERMABLOK3®

| | |
|----------------------------|--|
| Virucidal Activity | Except Valencia Pure White 107-9607 that has PERMABLOK3® Plus ISO 18184:2019: Coated Fabrics treated with PERMABLOK3® are proven to reduce the presence of Coronavirus** by more than 90% within one hour of contact. |
| | ISO 21702:2019: All the Coated fabrics treated with PERMABLOK3® are capable of reducing the Coronavirus** activity by 99,9% within 24 hours of exposure on the surface. |
| Bacteriostatic Properties: | ISO 22196:2011. Value of antibacterial*** activity R>2. ** Testing was conducted with material exposed to Feline Coronavirus (same coronaviridae family, structures and mechanisms similar to SARS-CoV2) |
| | *** Testing was conducted with material exposed to <i>Staphylococcus aureus</i> , <i>Staphylococcus aureus</i> (MRSA), <i>Escherichia coli</i> and <i>Klebsiella pneumoniae</i> . |
| WARRANTY | 5 Years. Terms and conditions apply, Warranty conditions are displayed on our website. |

- The vinyl should be cleaned periodically in order to maintain its appearance and prevent build-up of dirt and contaminants.
- Any stain, spills, or soiling should be cleaned up promptly to prevent the possibility of permanent staining.
- Vinyl fabrics treated with PERMABLOK3® require a minimum of maintenance to retain their good looks. Use soft soapy solutions or special cleaning products for vinyl fabrics to remove stains on the surface of the material. Remove only with a damp white cloth.
- Lacquers, strong cleaners, detergents, xylene-based solutions, acetone, or MEK cause immediate damage and contribute to the deterioration of the material. The use of such cleaners is at the owner's risk.

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. SPRADLING International GmbH, SPRADLING UK Ltd, and EURO SPRADLING S.L.U will not assume responsibility for dye transfer caused by external contaminants and possible permanent staining caused by this phenomenon.

PERMABLOK3® is a registered trademark of Sprading Holdings, Inc.® | Hi-Loft2™ and VALENCIA™ are trademarks of Spradling Holdings, Inc.®

Loop

A modern touch
on traditional
design elements.
First sight
impression,
combined with a
colourful yarn
blend when
looking more
closely.

CLASS B

LOOP



02



04




19



23




24



28



29

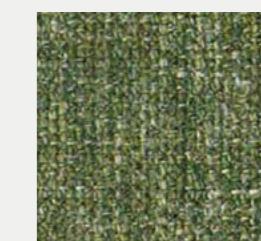


31



30



21



27



40




41




44



08

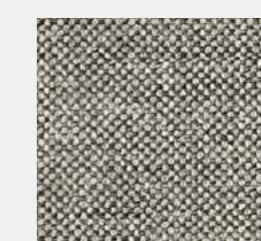

18



48

411

Colors may slightly vary due to photographic lighting sources or your monitor settings.

LOOP



39

LOOP

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Value | Test Method |
|--------------------------|-------------------|--------------------------------|----------------------|
| Weight | gr/m ² | 509 (± %5) | BS EN ISO 12127:1998 |
| Thickness | mm | 1,4 | |
| Width | cm | 140 (± %5) | |
| Roll Meter | mt | 50 (± %5) | |
| Resistance to Abrasion | | 40.000 | EN ISO 12947-2 |
| Seam Slippage | mm | Weft 3-4 / Warp 3-4 | ISO 13936-2 |
| Pilling | 2000 cycle | 5 | ISO 12945-2 |
| Colour Fastness to Light | | 5 | TS EN ISO 105-B2 |
| Composition | | %28 ACR %56 COT %4 LIN %12 PES | |



Product Characteristics

- Only valid for Loop colour codes.
- It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.
- The detergent must not include oxide bleach and bleach.
- There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.
- The product should not be exposed to direct sunlight.
- The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result.
- While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.
- The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.
- All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.
- Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents).
- Dry cleaning methods are also recommended for such stains.
- Vacuum cleaner can be used on daily and weekly basis.
- Please get a confirmation about stocks.
- The using place and purpose of the product should be conventionally accepted places and purposes.
- No liability can be accepted for products that are not used properly.
- The information stated above is of reliable common values. Please ask for special values of the contract.

Era


A subtle, two tone polyester fabric containing stretch in both directions for ease of upholstery.

CLASS A


CAMIRA - ERA




TRANSITION
CSE30




SPLITSECOND
CSE31




LIFETIME
CSE03




OCCASION
CSE32




MEASURE
CSE27




SEQUENCE
CSE25



SPAN
CSE05



TURN
CSE26




EXPERIENCE
CSE29




EXTENT
CSE28



CALENDAR
CSE19



DATE
CSE24



CYCLE
CSE06



PHASE
CSE17



PRIME
CSE09




ALLOWANCE
CSE38



CHAPTER
CSE08



PERENNIAL
CSE12



RANGE
CSE42



MATURITY
CSE40

CAMIRA - ERA



CAMIRA - ERA



PRODUCT SPECIFICATIONS

| | |
|---------------------|--|
| Application | Task Seating / Soft Seating |
| Composition | 100% Polyester |
| Environmental | Certified to OEKO-TEX® Standard 100 Certified to Indoor Advantage™ "Gold" Non metallic dyestuffs |
| Width | 140 cm minimum |
| Weight | 320 g/m ² ±5% |
| Abrasion Resistance | Heavy duty / 10 year guarantee. Independently certified to ≥100,000 Martindale cycles |
| Flammability | EN 1021 - 1&2 (cigarette & match), BS 7176 Low Hazard EN 13501-1 Adhered Class B, s1, d0, EN 13501-1 Un-adhered Class C, s1, d0 BS 7176 Medium Hazard with EnviroFlam5 |
| Light Fastness | 5 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Bleach cleanable | ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution. |
| Guarantee | 10 Years |

Cleaning
Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C.

Xtreme

A modern crepe weave
fabric made from
100% post-consumer
recycled polyester.

CLASS A

B&F

CAMIRA - XTREME



ADODO
YS165



ARUBA
YS108



SANDSTORM
YS071




NOUGAT
YS091



SOMBRERO
YS046



SOLANO
YS072




TORTUGA
YS168



LOBSTER
YS076



BELIZE
YS105



PANAMA
YS079




DIABLO
YS101




TOKARA
YS136




TOBAGO
YS030




BRIDGETOWN
YS102




TAROT
YS084




PARASOL
YS073



BLUEBELL
YS097



HONEYMOON
YS035















OCEAN
YS100




CAYMAN
YS024

CAMIRA - XTREME

STEEL
YS095MARTINIQUE
YS004SCUBA
YS082CURACAO
YS005COSTA
YS026APPLE
YS096MADURA
YS156LOMBOK
YS159APPLEDORE
YS077TABOO
YS045CAMPECHE
YS074TONGA
YS160WINDJAMMER
YS047KRABI
YS141BLIZZARD
YS081RUM
YS173OSUMI
YS171BONAIRE
YS172PADANG
YS145HAVANA
YS009

CAMIRA - XTREME

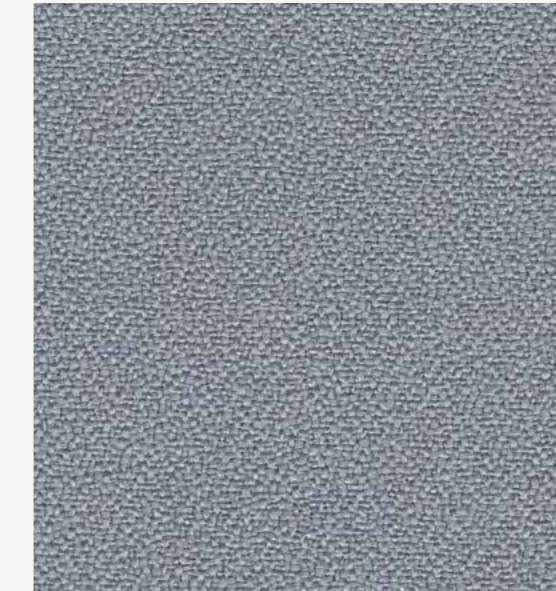SLIP
YS094

PRODUCT SPECIFICATIONS

| | |
|---------------------|---|
| Application | Task Seating |
| Composition | 100% post-consumer recycled polyester |
| Environmental | Certified to the EU Ecolabel, Certified to OEKO-TEX® Standard 100, Certified to Indoor Advantage™ "Gold" Made from 100% recycled polyester Non metallic dyestuffs |
| Width | 140 cm minimum |
| Weight | 310 g/m ² ±5% |
| Abrasion Resistance | Heavy duty / 10 year guarantee. Independently certified to ≥100,000 Martindale cycle |
| Flammability | EN 1021 - 1&2 (cigarette & match), BS 7176 Low Hazard, BS 5852 Ignition Source 5, BS 7176 Medium Hazard, DIN 4102 B1, NF D 60-013, ÖNORM B 3825 & A 3800-1 (over 58 kg/m ³ CMHR foam), UNI 9175 Classe 1 IM, BS 476 Part 7 Class 1 |
| Light Fastness | 6 (ISO 105 - B02) |
| Fastness to Rubbing | Wet: 4, Dry: 4 (ISO 105 - X12) |
| Bleach cleanable | ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution. |
| Guarantee | 10 Years |

Cleaning

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo. For deeper cleaning use steam, bleach, alcohol or professionally dry clean. Can be washed at 60°C.

Athena

A mix of polyester and cotton, suitable for upholstery with prestigious colours and soft touch.

CLASS A

ATHENA




1152



1153



1155

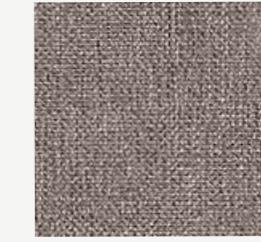

1162



1173



1228



1444



1229



1192



1206



1199



1187



1132



1224



1179



1500



1188



1190




1225



1156

ATHENA



1233




1226




1203




1204




1170



1171



1141



1175



1140



1198

Colors may slightly vary due to photographic lighting sources or your monitor settings.

ATHENA

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Value | Test Method |
|----------------------------|-------------------|---------------------------|-------------|
| Composition | | 60% polyester, 40% cotton | |
| Weight | gr/m ² | 440 ±20 | ISO 2286-2 |
| Width | cm | 140 ±2 | |
| Resistance to Abrasion | cycles | >40.000 | ISO 12947-1 |
| Colour Fastness to Light | bw | 4/5 | ISO 105-B02 |
| Colour Fastness to Rubbing | wet dry | >5 >5 | ISO 105-X12 |
| Roll Length | m | 50 ±10 | |

Liquid Stains

Blot the liquid stain gently with a high-absorbent material. Pat dry the area gently with a dry material to remove the remaining humidity (cotton cloth, paper towel, etc....). If the stain from the spill remains, remove the stain with a soapy cloth without diffusing the stain. After each rubbing motion, refresh the clean soapy cloth in order to prevent soiling.

Solid Particles

Remove the excess soiling with ultimate care without diffusing. Remove the solid particle from the fabric surface with the help of a soft spatula. To remove dust, use a vacuum cleaner or a soft brush. The remaining stains should be removed by rubbing with a soapy cloth in circular motion.

Ball-Point Pen and Similar Difficult Stains

Dampen a clean cotton cloth in a white soap solution. Rub the stain off gently. Clean the surface with the damp cloth and leave the fabric for drying.

Alcohol Derives

Petroleum and alkali based solvents should not be used for cleaning. After all cleaning processes, the drying should be done with a low temperature blow dryer in large circular motion or the fabric should be left for natural drying. After drying, misoriented and damaged piles should be fixed with a soft brush.

Valid for all colors. Red colors may have less color fastness to rubbing.

Canyon

ARTIFICIAL LEATHER

High abrasion resistant
and flame retardant
high-quality easy to
clean artificial leather
with a genuine leather
look.

CLASS A

CANYON




21745



22658



22661



21747



22662



22663



21748



21753



21749



21750



21751




21754



21755




21757



21758

CANYON

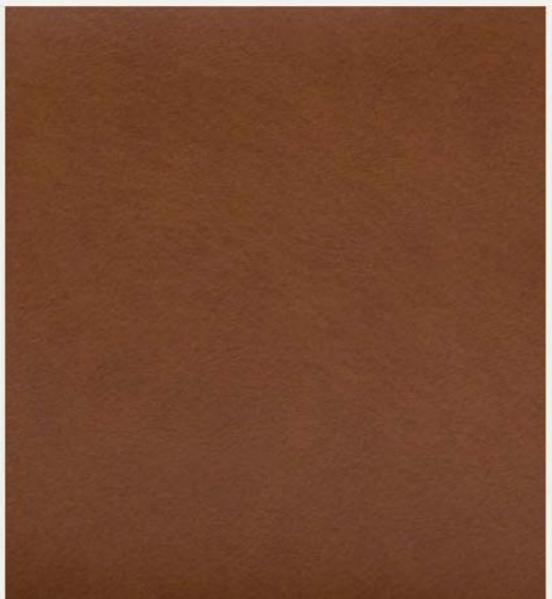

21728

CANYON

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Value | Test Method |
|---------------------------|-------------------|-------------------------------|-------------------------------|
| Composition | | 80% pvc, 18% polyester, %2 pu | |
| Weight | gr/m ² | 700 ±5% | TS 6450 |
| Thickness | mm | 1,35 ±5% | ISO 2589 |
| Width | cm | 140 ±2 | TS 4119 |
| Roll Length | m | 30 | |
| Resistance to Abrasion | martindale | >100.000 | BS EN ISO 12947-2:2016 |
| Tensile Strength (Length) | n | 485 | ISO 1421 |
| Tensile Strength (Across) | n | 290 | ISO 1421 |
| Elongation Strength | | Length 68 g Across 240 g | ISO 1421 |
| Colour Fastness to Light | | +5 | DIN EN ISO 105-B02:1994 |
| Flammability | | Pass | BS 5852-1:1979 EN 1021 1-2 |

Product Characteristics

- Only valid for Canyon colour codes.
- The cleaning process should start around the stain and held without dispersing the stain. It should be cleaned by gently wiping.
- You can wipe off ballpoint pen stains with 20% ethanol. For other stains such as coffee, tea, milk, cosmetics, jam, syrup, fruit juice 40c lukewarm water, neutral cleaning agents and sponge can be used.
- In oil and grease stains, the stain can be wiped off with the help of a brush after the chalk powder is used for covering the stain.
- The shoe polish stain can be removed with perchloroethylene or 10% diluted ammonia.
- All kinds of real and artificial leather should not be cleaned with bleach, detergent, coloured soap and similar materials and the product should not be exposed to direct sunlight. It should be kept away from sources of strong light (spot, etc.) and heat.
- There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.
- All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.
- Please get a confirmation about stocks.


New King

ARTIFICIAL LEATHER


Easy to clean artificial leather made of a special PVC and polyurethane mix with the support of polyester base lining.

CLASS A

NEW KING



6




13742




13743



13719




62501



13723



13724



13725



62503



62504



17563



62502



62505



13824




17566



13823



17567



24327



13592



62509

NEW KING




13721 38620 24329 13822



38621 24328 38619 17560



17568 13727

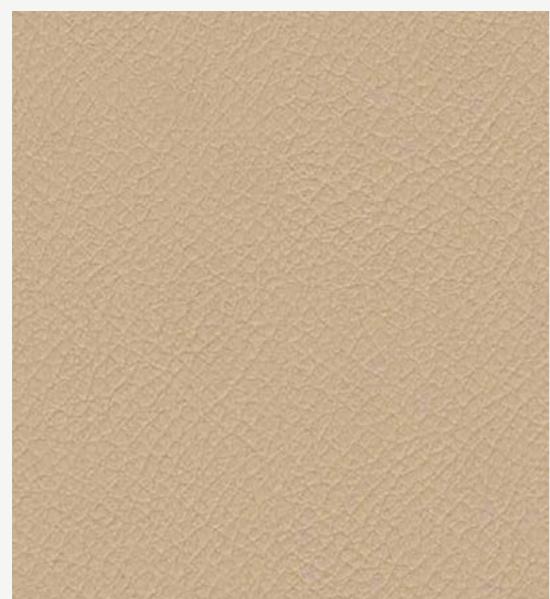

13591

Colors may slightly vary due to photographic lighting sources or your monitor settings.

NEW KING

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Value | Test Method |
|-----------------------------|-------------------|-------------------------------|-------------------------------|
| Composition | | 76% pvc, 22% polyester, 2% pu | |
| Weight | gr/m ² | 580 ±5% | |
| Width | cm | 140 | |
| Roll Length | m | 30 | |
| Resistance to Abrasion | mantindale | 230.000 | BS EN ISO 12947-2:1999&4:1999 |
| Bursting Strength | | > 600 kPa | BS EN ISO 5470-1:1999 |
| Elongation Strength | warp weft | 260 120 | BS EN ISO 4674-1:1999 |
| Resistance to Seam Slippage | warp weft | 250 n 250 n | BS 3320:1998 |
| Flammability | | pass | BS 5852-1:1979 EN 1021 1-2 |
| Light Fastness | | 5 | DIN EN ISO 105-B02:2002 |

Product Characteristics

- Only valid for New King colour codes.
- Our Atlantis product line has flame retardancy feature.
- The cleaning process should start around the stain and held without dispersing the stain. It should be cleaned by gently wiping.
- All kinds of real and artificial leather should not be cleaned with bleach, detergent, coloured soap and similar materials and the product should not be exposed to direct sunlight.
- The product should be kept away from sources of strong light (spot, etc.) and heat.
- The using place and purpose of the product should be conventionally accepted places and purposes. No liability can be accepted for products that are not used properly.
- Leather products should not be kept in plastic packaging and humid places for a long time. Solid objects such as toys and jewellery may cause unintended starches on the material.
- Leather-covered products should be placed at least 50 cm away from heat sources (stoves, radiators, fireplaces, etc.). Otherwise, the leather may lose moisture which may cause undesired cracks.
- Impacts, scratches, etc. that may occur due to transportation and external. should be considered out of warranty.
- Direct contact of pets with leather goods should be prevented.
- Direct contact of the products with high surface temperature (iron, etc.) with the leather may cause a damage.
- Protect the leather from harsh blows.
- Since ink on newspapers or magazines may get on the product and leave a permanent stain, do not leave it on the product. Especially if you sit with new jeans that give dark coloured paint on light coloured leather as an example, there may be stains. Note that this stain is not caused by the leather itself, but by the trousers that dye and colour.
- Weekly remove the dust or dirt on the surface of the product with a damp white and soft cotton cloth dampened with soapy water, rinse and dry when necessary.
- When coffee, tea, etc. spilled: Use a highly absorbent white cloth or paper. Do not delete it immediately! Make sure the stain is absorbed by the cloth or paper.
- Wipe off the remaining moisture with a soft cloth in circular motions.
- Alcohol and cologne are not recommended for difficult stains such as ink, ballpoint pen, lipstick. Wipe with warm soapy water with gentle circular movements.
- There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.
- Please get a confirmation about stocks.

New Sabine

Water repellent and high-colored material with linen effect.

CLASS A

NEW SABINE



WHITE



IVORY



TAN




SAND



SILVER



TAUPE



STONE



SADDLE



PALE BROWN




BROWN



CHOCO



WINE



BEIGE RED



MAROC



APRICOT



TOMATO RED




PASTEL VIOLET



KIWI



CEMENT GREY




GREEN GREY

NEW SABINE



NORDIC AQUA BLUE STEEL BLUE

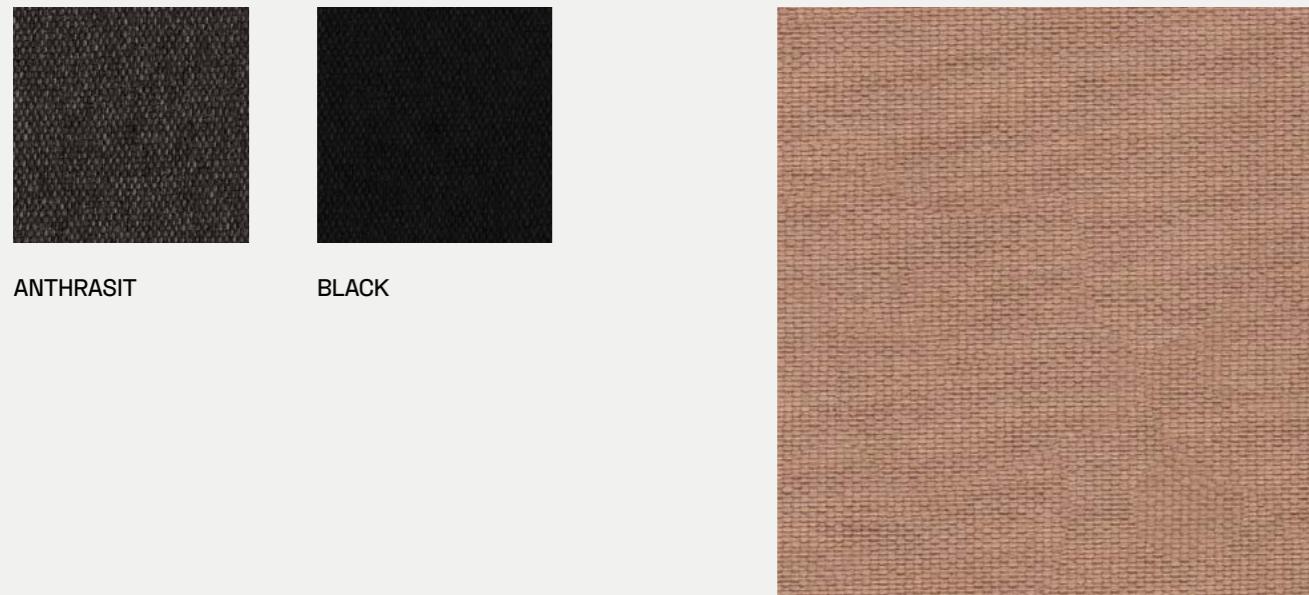

EARTH



436

NEW SABINE

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Limit | Value | Test Method |
|-----------------------------|-------------------|----------------|------------|-------------------------|
| Composition | | 100% polyester | | |
| Weight | gr/m ² | | 380 | ISO 3801 |
| Width | cm | | 137 | ISO 22198 |
| Roll Meter | m | | 50 | ISO 12947-2 ISO 1294 |
| Resistance to Abrasion | martindale | | 50.000 | BS EN ISO 12947-2 |
| Tear Strength | n | warp weft | 133 106 | ISO 13937-2 |
| Resistance to Seam Slippage | mm | warp weft | 1-2 0-1 | ISO 13906-2 |
| Pilling | 2000 dvr | | 5 | ISO 12945-2 |
| Color Fastness | | dry wet | 5 5 | ISO 105-X12 |

Product Characteristics

- Only valid for New Sabine colour codes.
- It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.
- The detergent must not include oxide bleach and bleach.
- There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.
- The product should not be exposed to direct sunlight.
- The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result.
- While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.
- The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.
- All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.
- Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents).
- Dry cleaning methods are also recommended for such stains.
- Vacuum cleaner can be used on daily and weekly basis.
- The dark colours of this product, which is produced as ball painting, should be cleaned with a damp cloth after laying and afterwards, the paint crumbs that could remain between the textures. This process can be done several times if necessary.
- The product has a teflon feature.
- Please get a confirmation about stocks.

Nino

High abrasion resistant material, suitable for contract with a wool-like look and touch.

CLASS A

NINO



135-135




35-135



17-135



18-17



133-38



69-38



18-72



38-38



143-12



147-12




143-87




52-27



22-27




22-147



27-147



130-32



24-24



87-87




69-87




72-24

NINO



09-24

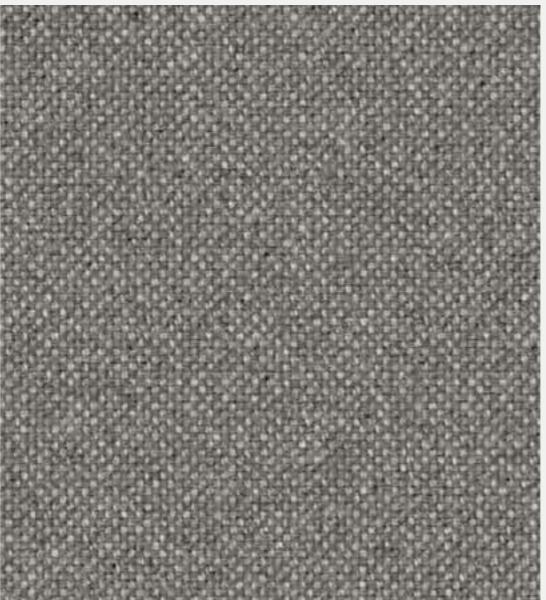

07-135



NINO

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Value | Test Method |
|------------------------|-------------------|--------------------------------|------------------|
| Composition | 100% polyester | | |
| Weight | gr/m ² | 375 ±10% | |
| Width | cm | 140 ±2 | |
| Roll Meter | m | 50 | |
| Resistance to Abrasion | tour | 80.000 | ISO 12947-2:1998 |
| Light Fastness | | Blue Scale: 6 Grey Scale: 4 | ISO 105-X12:2001 |
| Pilling | | 5 | ISO 12945-2:2000 |

Product Characteristics

- Only valid for Nino colour codes.
- It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.
- The detergent must not include oxide bleach and bleach.
- There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.
- The product should not be exposed to direct sunlight.
- The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result.
- While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.
- The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.
- All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.
- Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents). Dry cleaning methods are also recommended for such stains.
- Vacuum cleaner can be used on daily and weekly basis.

Gana

Voluminous fabric
with a 3D look
emerging from
opposite colour
schemes.
A balanced view
in every space.

CLASS A

GANA



01-01



01-08



01-06



01-04



02-01



01-07



02-05



01-03



02-02




02-04



02-09



02-08




02-07



02-06

GANÀ

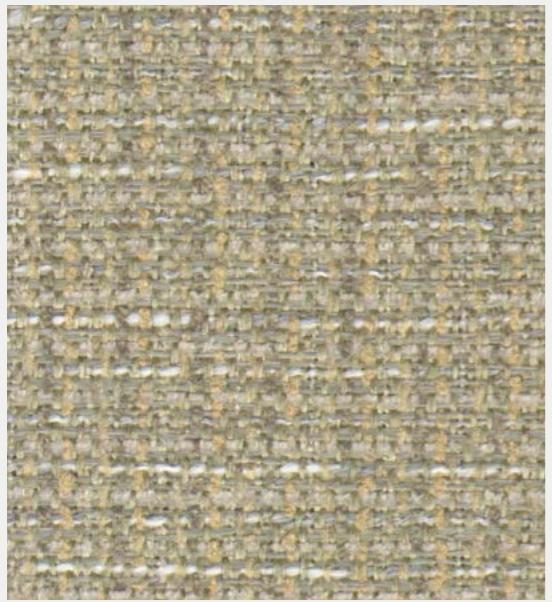

01-05

GANÀ

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Value | Test Method |
|--------------------------|-------------------|-----------------------------|----------------|
| Weight | gr/m ² | 330 (± %5) | |
| Thickness | mm | | |
| Width | cm | 140 | |
| Roll Meter | mt | 50 | |
| Resistance to Abrasion | | 40.000 | EN ISO 12947-2 |
| Tensile Strength | N | Weft-> 983 N Warp-> 953 N | EN ISO 13934-1 |
| Tear Strength | N | Weft-> 81 N Warp-> 115 N | EN ISO 13937-3 |
| Seam Slippage | mm | Weft-> 4,3 mm Warp-> 2,4 mm | EN ISO 13936-2 |
| Pilling | 2000 cycle | 4-5 | ISO 12945-2 |
| Colour Fastness - WET | | 4 | ISO 105-X12 |
| Colour Fastness - DRY | | 3-4 | ISO 105-X12 |
| Colour Fastness to Light | | 4-6 | ISO 105 B02 |
| Composition | | %77 PES %23 PAN | |



Product Characteristics

- Only valid for Gana colour codes.
- It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.
- The detergent must not include oxide bleach and bleach.
- There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.
- The product should not be exposed to direct sunlight.
- The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result.
- While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.
- The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.
- All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.
- Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents).
- Dry cleaning methods are also recommended for such stains.
- Vacuum cleaner can be used on daily and weekly basis.
- Please get a confirmation about stocks.
- The using place and purpose of the product should be conventionally accepted places and purposes.
- No liability can be accepted for products that are not used properly.
- The information stated above is of reliable common values. Please ask for special values of the contract.

Twister

Durable and
fabric that adds
inspiration to
modern spaces.

TWISTER



9852



9855



9859



16060



16056



5405



16059




1202



9858



5401



5408




5406




5404



5403




503



501

CLASS A

TWISTER

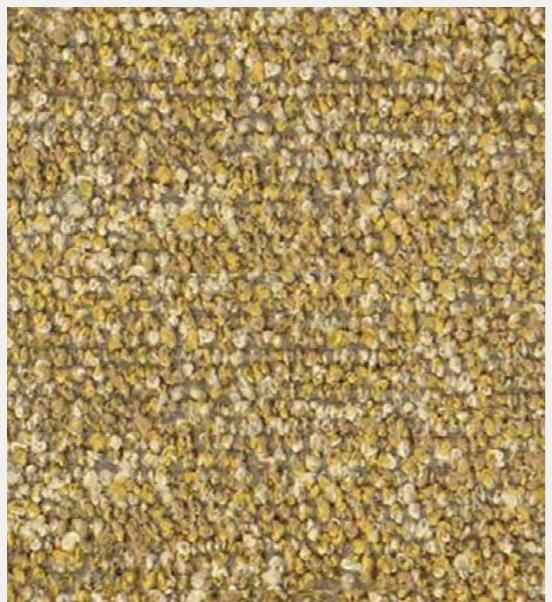

16054

TWISTER

PRODUCT SPECIFICATIONS

| Technical Informations | Unit | Value | Test Method |
|--------------------------|-------------------|-------------------------|----------------------|
| Weight | gr/m ² | 507 (± %5) | BS EN ISO 12127:1998 |
| Thickness | mm | 1,5 | |
| Width | cm | 140 (± %5) | |
| Roll Meter | mt | 40 (± %5) | |
| Resistance to Abrasion | | 50.000 | EN ISO 12947-2 |
| Seam Slippage | mm | Weft 5.0 / Warp 4.5 | ISO 13936-2 |
| Pilling | 2000 cycle | 4-5 | ISO 12945-2 |
| Colour Fastness to Light | | 5 | TS EN ISO 105-B2 |
| Composition | | %13 COT %37 PES % 50 PP | |



Product Characteristics

- Only valid for Twister colour codes.
- It can be cleaned with neutral cleaning materials. Chemical solvents should not be used.
- The detergent must not include oxide bleach and bleach.
- There may be colour and tone differences between different lots, arising from the nature of the production and within conventionally accepted limits.
- The product should not be exposed to direct sunlight.
- The cutting should be done after the approval of the colour, tone and defect controls by the related parties. In this context, taking into account that, although exceptional, there may be tonal differences of products that arrive in pieces, they should be checked with the delivery of the product before cutting. Making upholstery without above mentioned examination may cause not getting the desired result.
- While cutting or upholstery, the products should never be left folded, nor should they be left under-weight that may cause forming lines on them.
- The tape should never be used on the product surface. This matter, which our company pays attention to, should not be overlooked after the product has been checked or if it is wrapped for a second time during use. When the leftover product should be rolled, please pay attention not to fold it tightly.
- All kinds of leather and velvet should not come into direct contact with the sponge. Sponge should be covered with interlining or cotton lining.
- Stains, such as oil, chocolate, chewed gum should never be cleaned with liquid (water, thinner, acetone and other solvents).
- Dry cleaning methods are also recommended for such stains.
- Vacuum cleaner can be used on daily and weekly basis.
- Please get a confirmation about stocks.
- The using place and purpose of the product should be conventionally accepted places and purposes.
- No liability can be accepted for products that are not used properly.
- The information stated above is of reliable common values. Please ask for special values of the contract.


Plain Melange

Water repellent, stain resistant and mildew resistant fabric, designed to furnish indoor and outdoor spaces.

Only for Sole Collection.

CLASS A

IRISUN - PLAIN MELANGE



020



783



835



018



070



834



072



693



875



016



879



079



872



690



876



694



870



882




833



583

IRISUN - PLAIN MELANGE

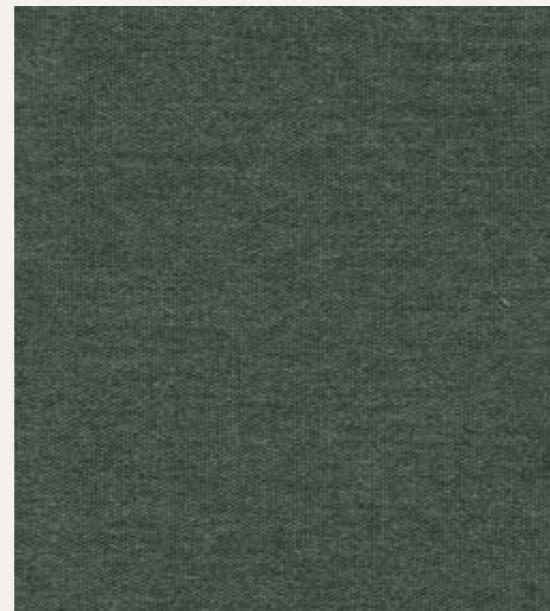

874



Colors may slightly vary due to photographic lighting sources or your monitor settings.

IRISUN - PLAIN MELANGE

PRODUCT SPECIFICATIONS

| | |
|---------------------------------------|---|
| Yarn | 100% solution dyed acrylic |
| Width | 137 cm |
| Roll length | 30 m |
| Weight | 240 gr/m ² |
| Martindal | 15000 cycles |
| Finishing | Water repellent, anti-stain and anti-mould treatment |
| Oil-repellency | 5 off 8 |
| Spray Test | 5 off 5 |
| UV Colour fastness | 7 off 8 |
| Colour fastness to weather | 7 off 8 |
| Colour fastness after washing at 40°C | 5 off 5 |
| Flame resistance | CAL TB 117 - 2013 Section 1 |
| Warranty | 5 years |
| Tolerance | ± 5% |
| Care | See the ISO symbols |
| Biocides | It contains biocidal agent with approved active substances: Octyl Isothiazolinone |

Bogota

REAL LEATHER

Real leather that
has a pigmented and
protective top coat
with a soft handle and
a silky matt finish.

CLASS HD1

BOGOTA




109837



158




316



4460




109836



106984




344



9680



109839



109840




109843




109841



109842



699



677




2078



109838



1609




2829

455

Colors may slightly vary due to photographic lighting sources or your monitor settings.

BOGOTA

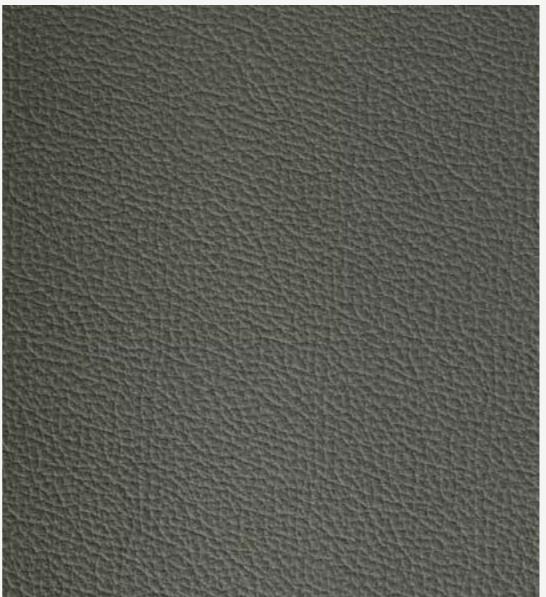

8371

BOGOTA

PRODUCT SPECIFICATIONS

BOGOTA

| Test | Method | Result |
|--|--|---|
| Colour fastness to rubbing Nr. 500 dry rubs Nr. 150 wet rubs Nr. 80 alkaline pH 8 | IUF 450/UNI EN ISO 11640 IUF 450/UNI EN ISO 11640 IUF 450/UNI EN ISO 11640 | >= 4 grey scale >= 4 grey scale >= 4 grey scale |
| Flexing endurance | IUP 20 / UNI EN ISO 5402 | >= 30.000 |
| Tear strength | IUP 40 / UNI EN ISO 3377-1 | >= 20 N |
| Adhesion | IUF 470 / UNI EN ISO 11644 | >= 3.50 N/cm |
| Light resistance (xenon test) | IUF 402 / UNI EN ISO 105-B02 | 5 blue scale |
| Fire resistance | UNI EN ISO 1021-1/2 BS 5852 1991 Sec. 4 NI/0-1 California T.B. 117 | Pass Pass Pass |

Product Characteristics

- Avoid placing leather near direct sunlight.
- Keep the leather away from heat sources.
- Dust regularly with a soft and dry cloth.
- If a spill should occur, blot immediately with a clean absorbent cloth or sponge.
- For deeper cleansing use a lightly damp cloth with natural soap. Do not saturate.
- Do not rub. Use a circular motion and clean the entire surface.
- Using a soft and dry cloth, dry immediately after the treatment.
- Never use household cleaning agents, furniture polishes, ammonia, bleach, varnish, oils or similar.
- If you wish to use specifically made creams or lotions for leather upkeep and care feel please consult specialized companies and leather professionals who supply such sets. If you need recommendations on who to consult, we are happy to indicate.

All our leathers comply with the strict regulations and EU Directives covering the use and presence of POP, CFC, Chromo VI, Dimethylfumarate (DMF) and Azo dyestuffs during the tanning process. Due to the natural properties of leather colour variations between one dye lot and another may occur.

This technical specification sheet replaces any copies in your possession. The values indicated in this sheet refer to the leather at the time of supply. Once the leather has been processed, cut, marked we can no longer guarantee the same values.

Considering the natural aspect of this product and unpredictable related factors, we reserve the right to change the indicated specifications at any time without prior notice.

Important Note

Please note that leather is natural material that becomes soft and stretches over time.

UPHOLSTERY CATEGORIES

| BRAND | NAME | TYPE | COMPOSITION | MARTINDALE | FLAMMABILITY |
|---------|-----------|----------------|--------------------|--|--------------|
| CLASS A | CAMIRA | ERA | FABRIC | 100% Polyester | 100.000 |
| | CAMIRA | XTREME | FABRIC | 100% Polyester | 100.000 |
| | SFC | ATHENA | FABRIC | 60% Polyester, 40% Cotton | 40.000 |
| | ALYA | CANYON | ARTIFICIAL LEATHER | 80% Pvc, 18% Polyester, %2 Pu | 100.000 |
| | ALYA | NEW KING | ARTIFICIAL LEATHER | 76% Pvc, 22% Polyester, 2% Pu | 230.000 |
| | ALYA | NEW SABINE | FABRIC | %100 Polyester | 40.000 |
| | ALYA | NINO | FABRIC | %100 Polyester | 70.000 |
| | ALYA | GANÀ | FABRIC | %77 Pes %23 Pan | 40.000 |
| | ALYA | TWISTER | FABRIC | %13 Cot, %37 Pes, %50 Pp | 50.000 |
| | IRUSUN | PLAIN MELANGE | FABRIC | 100% Solution dyed acrylic | 15.000 |
| CLASS B | CAMIRA | ASPECT | FABRIC | 75% Trevira® Cs Flame Retardant Polyester, 25% Polyester | 50.000 |
| | CAMIRA | QUEST | FABRIC | 100% Post-Consumer Recycled Polyester Including 75% Sequal® Yarn | 100.000 |
| | CAMIRA | REPLAY | FABRIC | 100% Post-Consumer Recycled Polyester | 100.000 |
| | CAMIRA | VITA | ARTIFICIAL LEATHER | Surface: 98% Pvc, 2% Pu Substrate: 100% Cotton | 100.000 |
| | FIDIVI | FIocco | FABRIC | 100% Polyester Trade Mark Trevira Cs | 60.000 |
| | FIDIVI | MILANO | FABRIC | 100% Polyester Trade Mark Trevira Cs | 80.000 |
| | FIDIVI | ROCCIA | FABRIC | 100% Polyester Trade Mark Trevira Cs | 70.000 |
| | FIDIVI | TIME | FABRIC | 100% Polyester - Recycled Grs | 100.000 |
| | KVADRAT | AUTUMN | FABRIC | 100% Recycled Polyester | 50.000 |
| | SPRADLING | VALENCIA | ARTIFICIAL LEATHER | Vinyl / Urethane Topcoat Topcoat: Vinyl - Backing: 100% Polyester Hi-Loft™ | 300.000 |
| CLASS C | ALYA | LOOP | FABRIC | %28 Acr, %56 Cot, %4 Lin, %12 Pes | 40.000 |
| | CAMIRA | BLAZER | FABRIC | 100% Virgin Wool | 50.000 |
| | CAMIRA | MAIN LINE FLAX | FABRIC | 75% Virgin Wool, 25% Flax | 50.000 |
| | FIDIVI | FOX | FABRIC | 100% Polyester Trade Mark Trevira Cs | 120.000 |
| CLASS C | FIDIVI | LASER J | FABRIC | 100% Polyester Trade Mark Trevira Cs | 150.000 |

| BRAND | NAME | TYPE | COMPOSITION | MARTINDALE | FLAMMABILITY |
|---------|-----------|-----------------|--------------------|--|--------------|
| CLASS C | KVADRAT | REMIX 3 | FABRIC | 90% New Wool, 10% Nylon | 100.000 |
| | KVADRAT | RELATE | FABRIC | 100% Trevira CS | 80.000 |
| | KVADRAT | TECHNICOLOUR | FABRIC | 100% English Wool. | 80.000 |
| | SPRADLING | SILVERTEX | ARTIFICIAL LEATHER | Vinyl / Urethane Topcoat Topcoat: Vinyl - Backing: 100% Polyester Hi-Loft™ | 300.000 |
| | CLASS D | CAMIRA | OCEANIC | 100% Post-Consumer Recycled Polyester, Including 50% Eequal® Yarn | 100.000 |
| | CLASS E | CAMIRA | CRAGGAN FLAX | 85% Wool, 10% Flax, 5% Polyamide | 50.000 |
| | KVADRAT | STEELCUT 3 | FABRIC | 90% New Wool, 10% Nylon | 100.000 |
| | CLASS F | KVADRAT | STEELCUT QUARTET | 90% New Wool, 10% Nylon | 100.000 |
| | KVADRAT | STEELCUT TRIO 3 | FABRIC | 90% New Wool, 10% Nylon | 100.000 |
| | CLASS HD1 | ORION | BOGOTA | REAL LEATHER | - |

FABRIC COMPATIBILITY LIST

Suitable

Not recommended by B&T
but can be used on demand

not suitable


* Please note that leather is a natural material that becomes soft and stretches over time.

Suitable

Not recommended by B&T
but can be used on demand

Not suitable

FABRIC COMPATIBILITY LIST

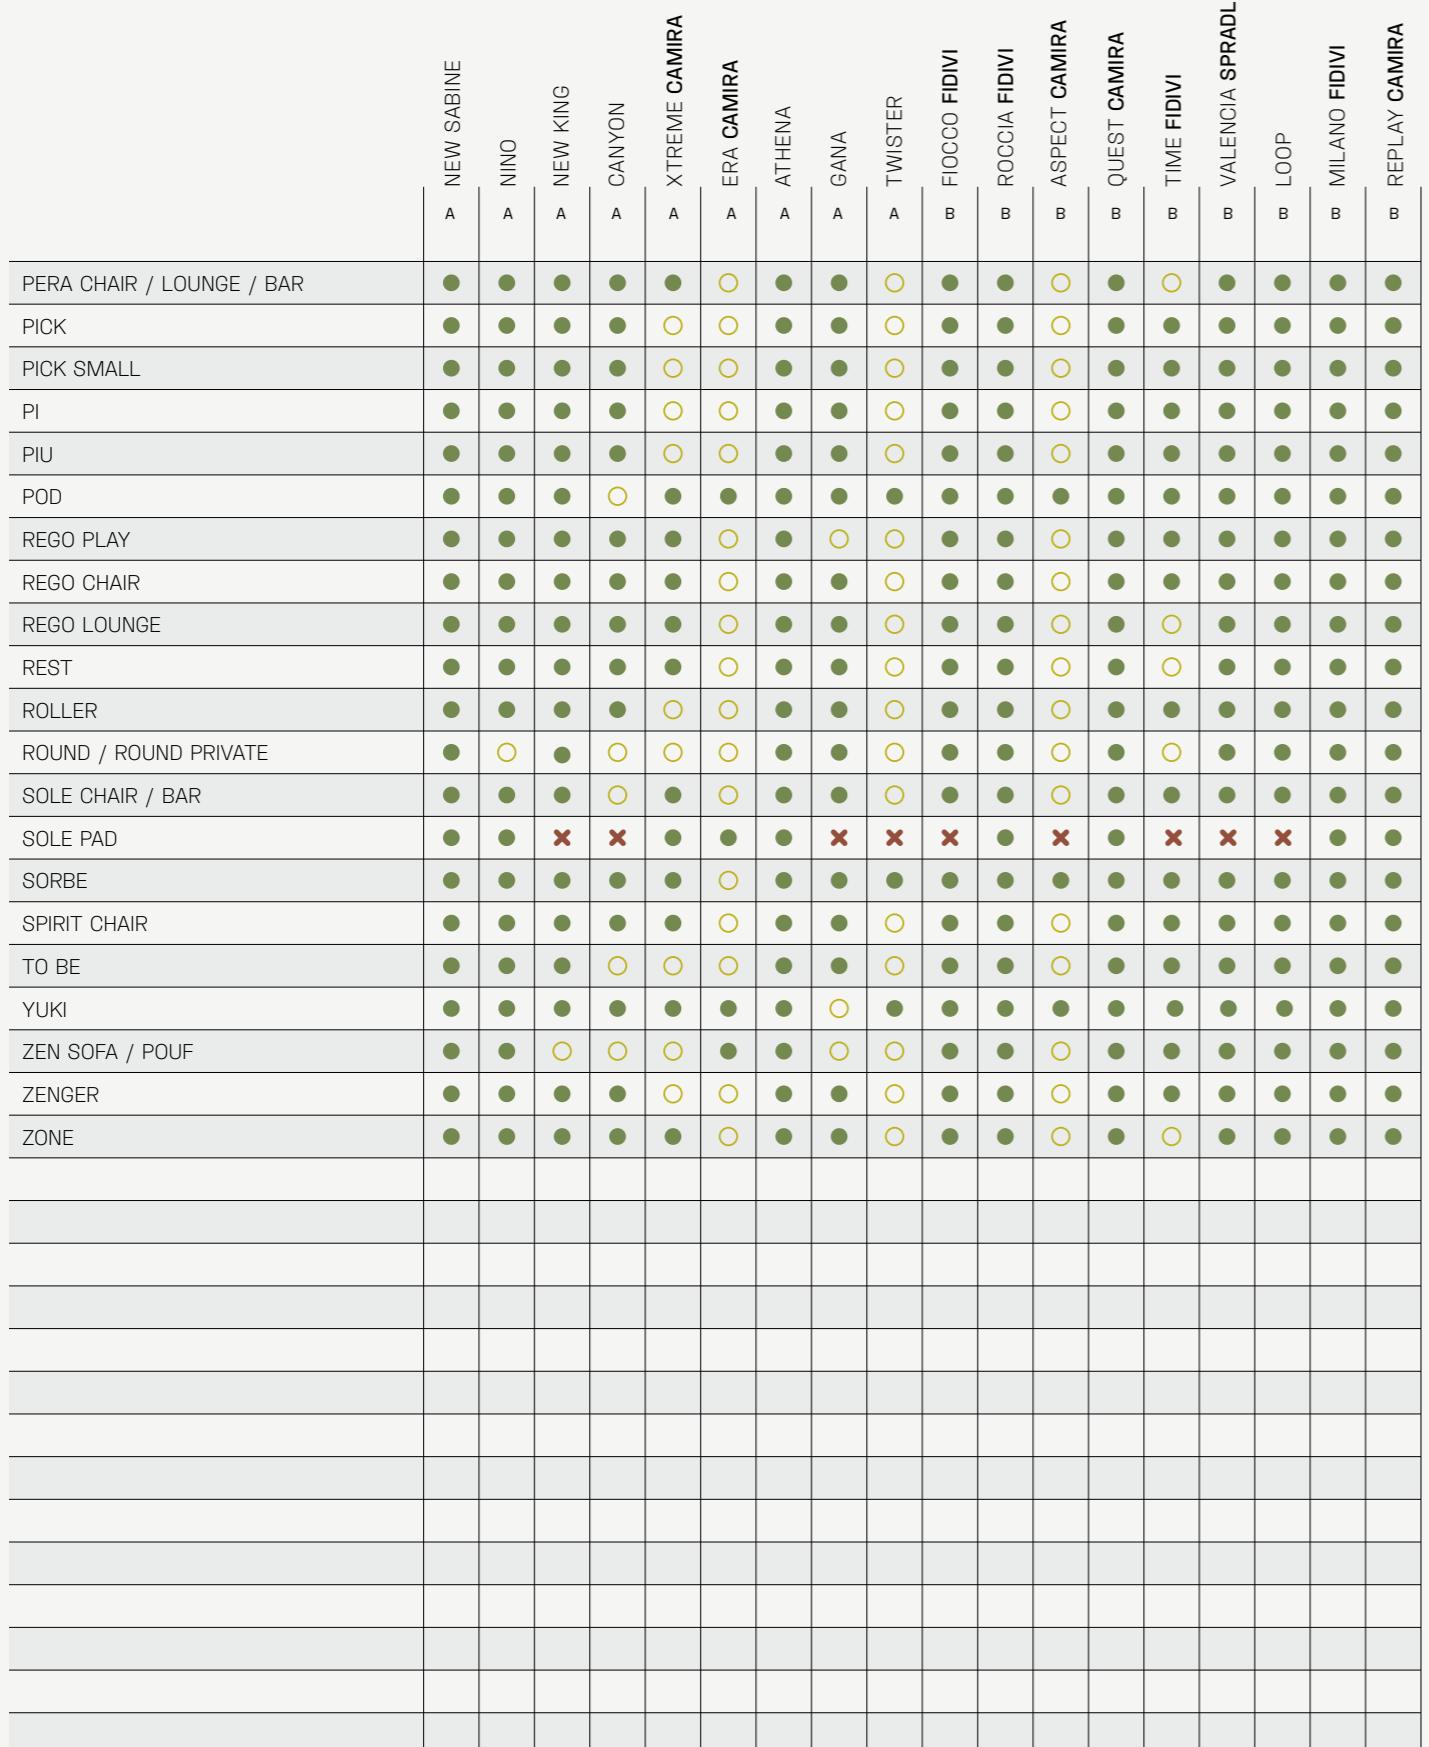


Suitable

Not recommended by B&T
but can be used on demand

not suitable

* Please note that leather is a natural material that becomes soft and stretches over time.

Not suitable

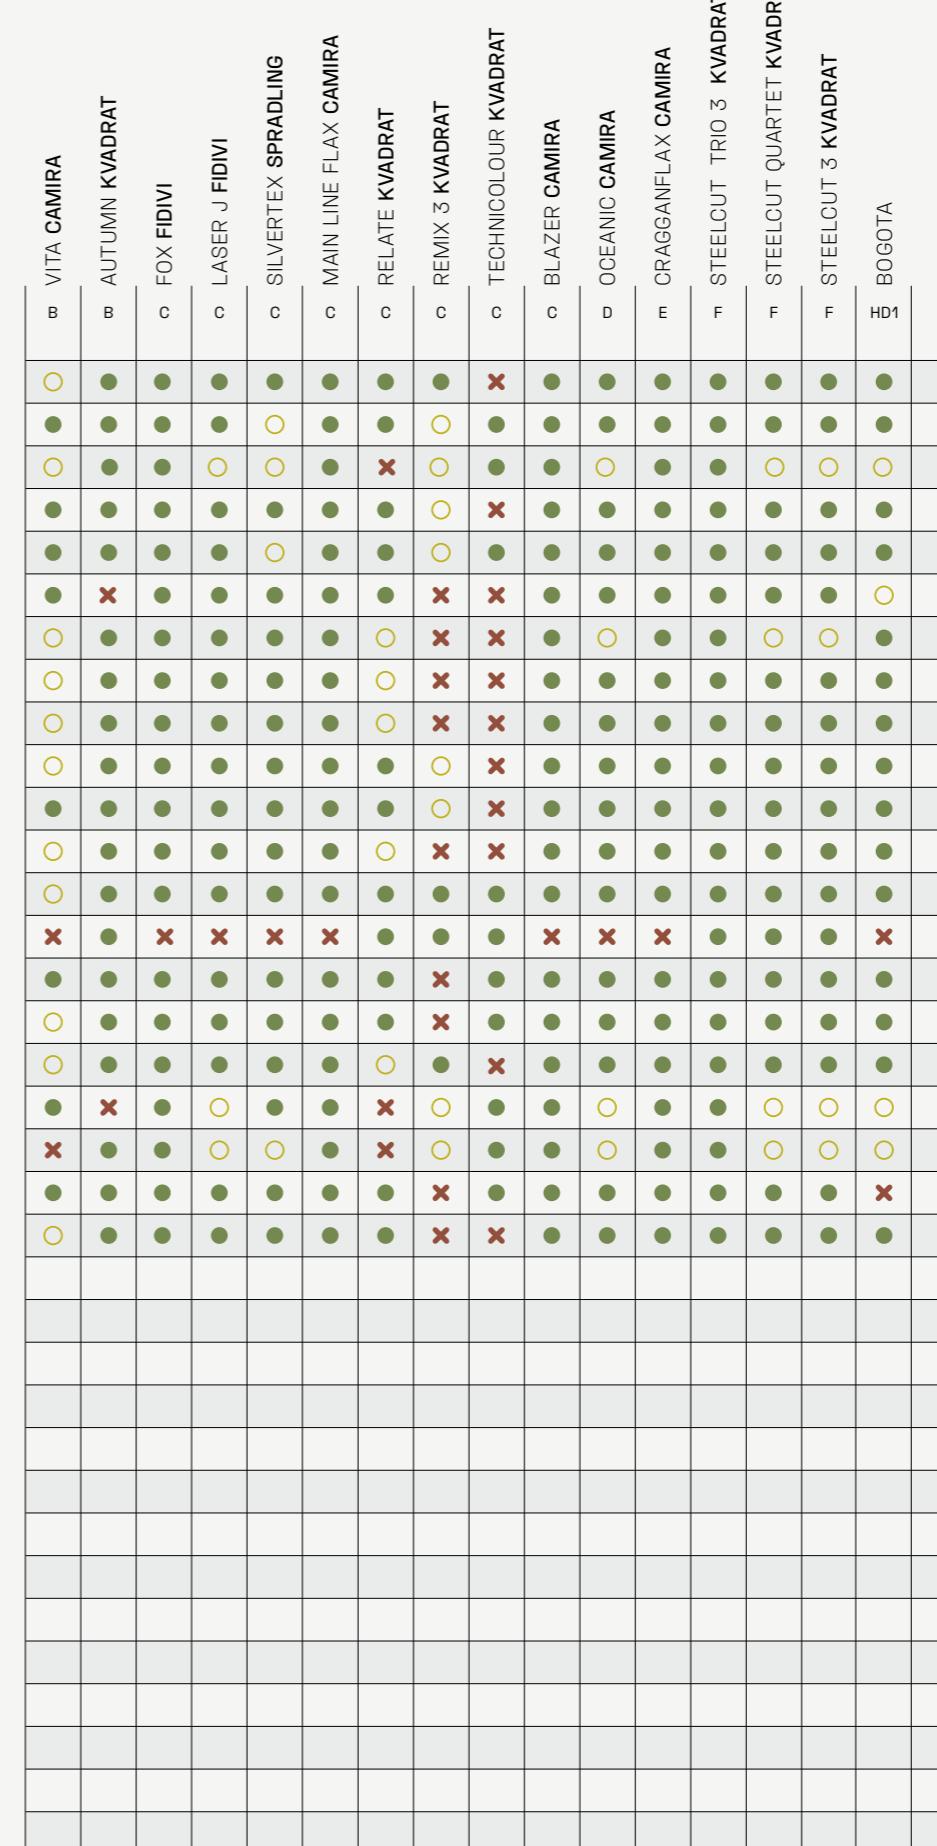

Suitable

Not recommended by B&T
but can be used on demand

not suitable